

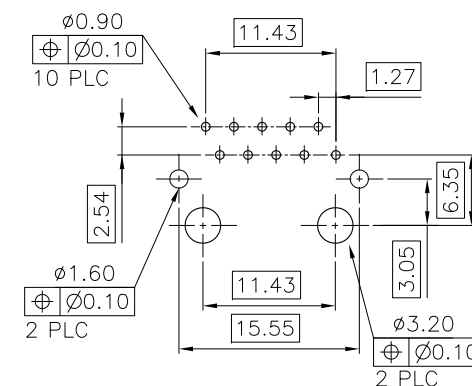


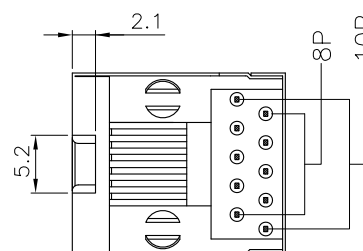

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

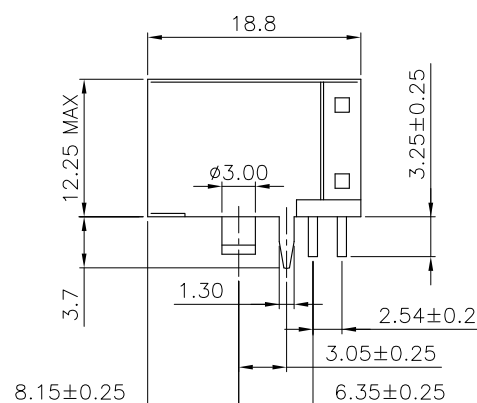

5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSELETE	10P8C	RED	50 μ "	3-1734580-4
OBSELETE			30 μ "	3-1734580-3
OBSELETE			15 μ "	3-1734580-2
OBSELETE			6 μ "	3-1734580-1
OBSELETE	10P10C	BLACK	50 μ "	1-1734580-4
			30 μ "	1-1734580-3
			15 μ "	1-1734580-2
			6 μ "	1-1734580-1
OBSELETE	10P8C 	BLACK	50 μ "	1734580-8
			30 μ "	1734580-7
			15 μ "	1734580-6
			6 μ "	1734580-5
 OBSELETE	10P8C	BLACK	50 μ "	1734580-4
			30 μ "	1734580-3
			15 μ "	1734580-2
			6 μ "	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

CUSTOMER DRAWING

DIMENSIONS:	
MM	
	
MATERIAL	
SEE NOTE	

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.10
4 PLC	$\pm -$
ANGLES	$\pm 3'$
FINISH	
SEE NOTE	

TE Connectivity

MODULAR JACK, RJ45, 8P8C, SHIELDED,
SIDE ENTRY, LOW PROFILE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734580	—
		SCALE	SHEET
		—	1 OF 2
			REV B3

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DWDIST
-

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD



SEE SHEET 1.

MODULAR JACK

TOP COVER

TRAY

CARTON

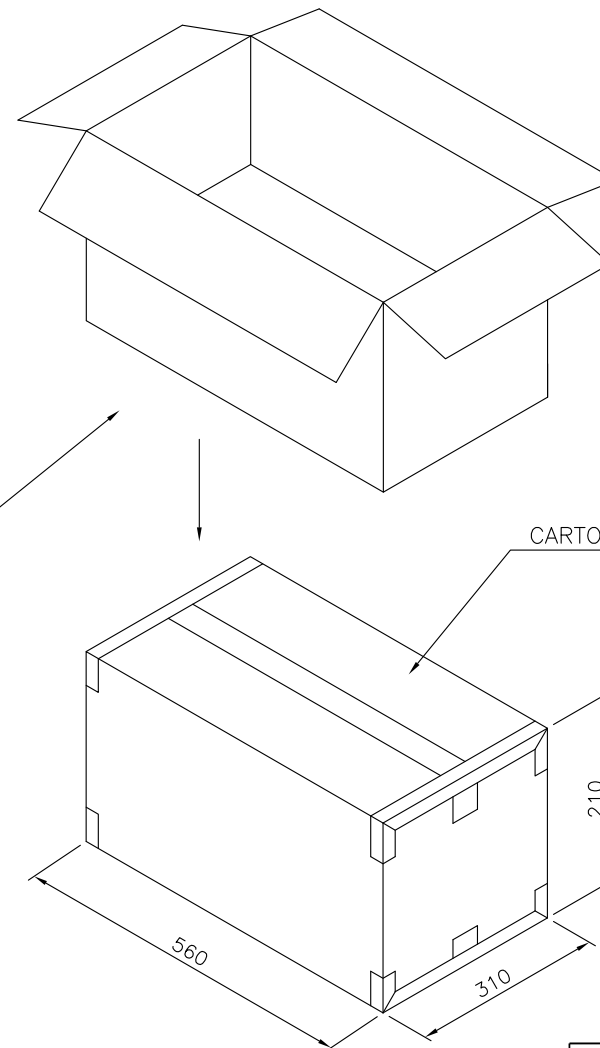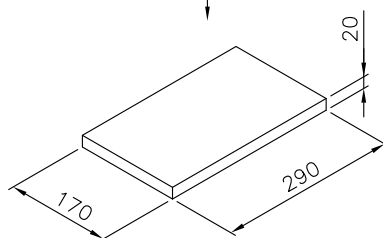

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU	01JUN2007	 TE Connectivity	
DIMENSIONS: MM		CHK S. HOU	01JUN2007		
		APVD W.J. KE	01JUN2007		
		PRODUCT SPEC			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE	
0 PLC ± -		WEIGHT	-		
1 PLC ± -		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779
2 PLC ± -		SCALE		DRAWING NO C=1734580	RESTRICTED TO
3 PLC ± -		SHEET		2 OF 2	REV B3
4 PLC ± -		FINISH			
ANGLES ± -					
MATERIAL					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1734580-3](#)