


Powerpole® Connectors

- PP75: up to 120 Amps

PP75 with
Mounting Wings

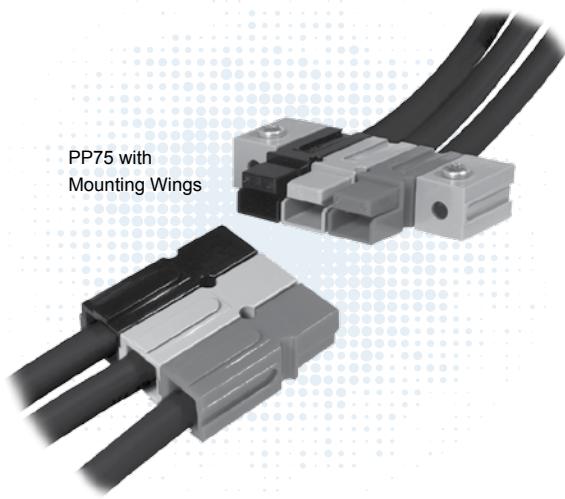

PP75 series Powerpole® housings can be used for wire-to-wire, wire-to-board, and wire-to-busbar applications. Wire sizes from #16 AWG (1.3 mm²) to #6 (13.3 mm²) offer power capabilities up to 120 amps per pole. Locking housings offer the capability to secure Powerpole® housings to each other and to mounting pads. Housings made from chemical resistant (CR) resin withstand industrial solvents better than standard housings.


- **Large Wire Range Accommodates up to #6 (10mm²) Wire**
Reducing bushings allow as small as #16 (1.5 mm²) wire to be used
- **Wire, PCB, and Busbar Contacts**
Allows one connection system to meet multiple needs
- **Mini-Powerclaw PCB Contacts Minimize PCB Footprint**
Removes the PP75 housing from the board side

| PP75 ORDERING INFORMATION |

PP75 Standard Housings

The second smallest Powerpole® housing can be used with wire contacts up to 6 AWG [10mm²] as well as PCB and busbar contacts.

Description		Part Numbers	
Minimum Quantity ...	1,000	100
Red	5916G7-BK	5916G7	
Green	5916G6-BK	5916G6	
Black	5916G4-BK	5916G4	
White	5916G5-BK	5916G5	
Blue	5916-BK	5916	
Yellow	5916G15-BK	5916G15	
Orange	5916G14-BK	5916G14	
Gray	5916G16-BK	5916G16	

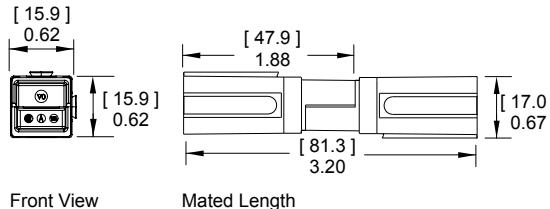


PP75 Chemical Resistant (CR) Housings

Has the same form and dimensions of the standard PP75 housing in a chemical resistant PBT/ PC blend housing. Suitable for use to -40°C.

Description		- Part Numbers -	
Minimum Quantity ...	1,000	100
Red	P5916G7-BK		
Black	P5916G4-BK		
White	P5916G5-BK		
Blue	P5916-BK		


Material ID Located Here
V0 = Standard
P = Chemical Resistant



PP75 Locking Dovetail Housings

Offers dovetails for stacking housings that have a locking feature to prevent housings separating. Can mate to standard and chemical resistant housings, but cannot be stacked with them.

Description		Part Numbers	
Minimum Quantity ...	1,000	100
Red	75LOKRED-BK	75LOKRED	
Green	75LOKGRN-BK	75LOKGRN	
Black	75LOKBLK-BK	75LOKBLK	
White	75LOKWHT-BK	75LOKWHT	
Blue	75LOKBLU-BK	75LOKBLU	
Gray	75LOKGRA-BK	75LOKGRA	

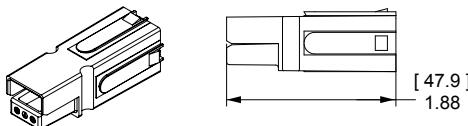


© 2018 Anderson Power Products, Inc. All rights reserved. APP®, Anderson Power Products®, A®, Powerpole®, SPEC Pak® and the APP Logo are registered trademarks of Anderson Power Products, Inc.

PP75 Premate Ground Housings


Offers a first-mate, last-break connection when stacked together with PP75 housings. Stacks together with PP75 standard and chemical resistant housings. Housings are mechanically keyed to prevent cross mating with power positions.

Description	Part Numbers		
Minimum Quantity....	1,000	100	...
Green	5927G6-BK	5927G6	

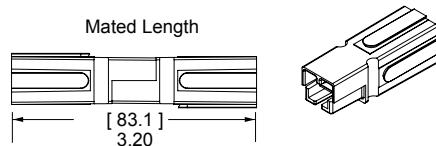**PP75 Silver Plated Wire Contacts**


Silver plated contacts offer the best electrical performance and durability up to 10,000 mating cycles. See reducing bushings in accessory section for smaller wires.

AWG	mm ²	Mating Force	Loose Piece		Dimensions	
			-- Part Numbers --	1,000 100	- A -	inches mm
Minimum Quantity						
6	13.3	Low	1307-BK	1307	0.22	5.59
6	13.3	High	5900-BK	5900	0.22	5.59
8	8.4	High	5952-BK	5952	0.19	4.83
12 to 10	3.3 to 5.3	Low	5953-BK	5953	0.14	3.56
12 to 10	3.3 to 5.3	High	5915-BK	5915	0.14	3.56

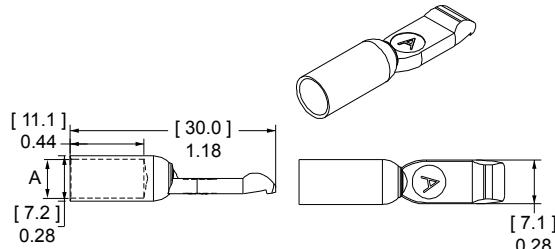**PP75 Premate Ground Wire Contacts**


Silver plated contacts for use with the PP75 Premate Ground Housing. Rated to 10,000 mating cycles.

Type	AWG	mm ²	Loose Piece		Dimensions	
			-- Part Numbers --	1,000 100	- A -	inches mm
Minimum Quantity						
Individual	6	13.3	1875G1-BK	1875G1	0.22	5.59
Individual	8	8.4	1875G2-BK	1875G2	0.19	4.83
Individual	12 to 10	3.3 to 5.3	1875G3-BK	1875G3	0.14	3.56

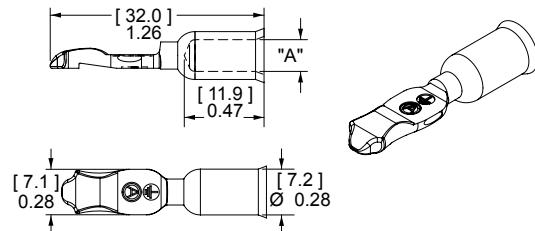**PP75 Silver Plated Busbar Contacts**

Provide a quick disconnect input or output busbar connection. Busbar contacts are for mating with wire contacts only. Part number 75BBS includes lock nuts. Locknuts must be ordered separately for B01915P1.


Type	Thread	Force	Mating			Part Numbers
			1,000	20	10	
Minimum Quantity						
Busbar	#10-24	High	B01915P1	-	75BBS	
Lock Nut	#10-24	-	H1216P8	110G54	-	

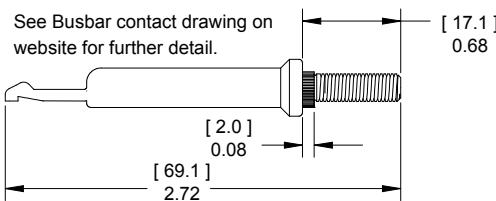**55A Right Angle Standard Powerclaw PCB Contacts**

Standard Powerclaw contacts are for use inside a PP75 housing and provide a color coded right angle connection to the PCB.

Description	Loose Piece Part Numbers		
Minimum Quantity ..	500	100	...
Tin Plated	PC5930T-BK	PC5930T	
Silver Plated	PC5930S-BK	PC5930S	


See PCB contact drawing on website for further detail.

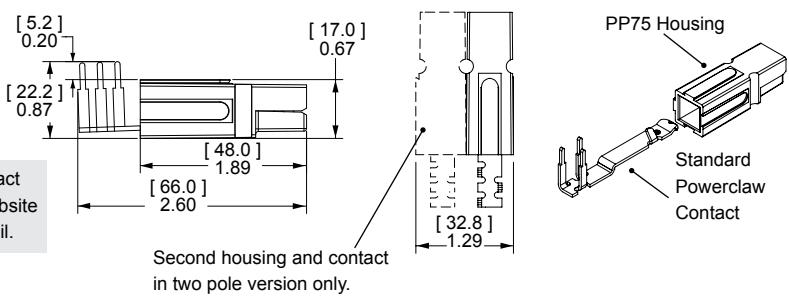

55A Right Angle Mini Powerclaw PCB Contacts

Right angle Mini Powerclaw contacts can be used on the PCB edge without a PP75 housing on the PCB side. A self polarizing design only allows PP75 wire housings to mate to PCB contacts one way.


Loose Piece	
Description	Part Numbers
Minimum Quantity ...	1,000 100
Tin Plated	PC5934T-BK PC5934T
Silver Plated	PC5934S-BK PC5934S

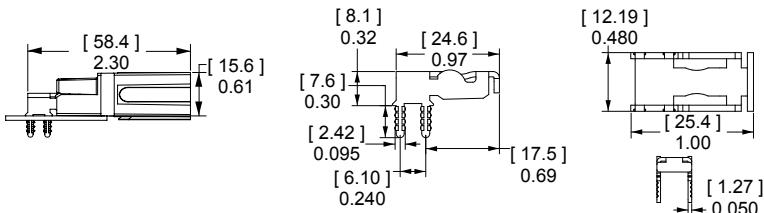

55A Vertical Mini Powerclaw PCB Contacts

Vertical Mini Powerclaw contacts save space by not requiring a PP75 housing on the PCB side. The guide housing is required for 2 pole applications to provide a polarized connection. (See PP75 accessories).

Loose Piece	
Description	Part Numbers
Minimum Quantity ...	1,500 100
Tin Plated	PC5933T-BK PC5933T
Silver Plated	PC5933S-BK PC5933S



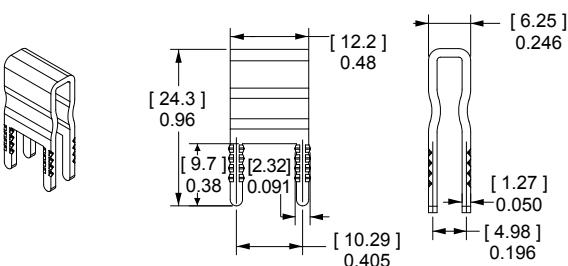


See PCB contact drawing on website for further detail.




PP75 TEMPERATURE CHARTS

Temperature rise charts are based on a 25°C ambient temperature.

Current - Temperature Derating per IEC 60512-5-2 Test 5B

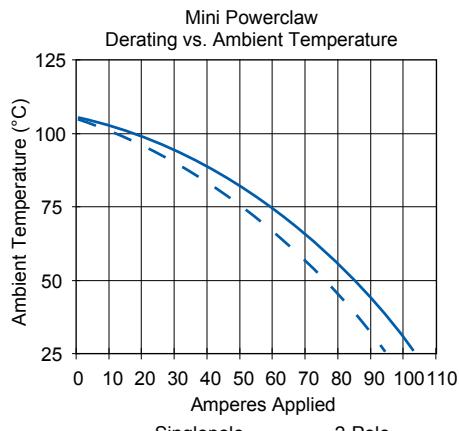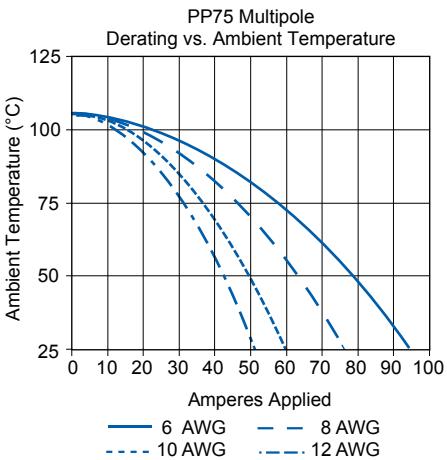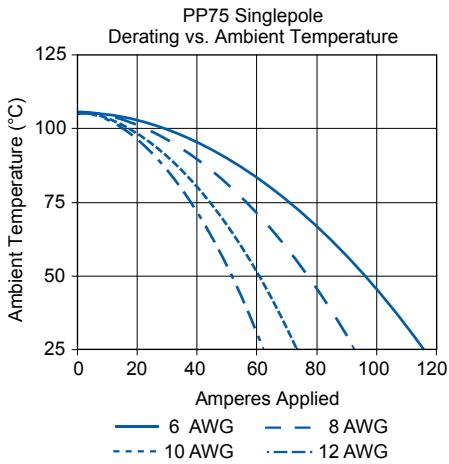

For Temperature Rise Above 60°C, Consult the Extended Temperature Rise Charts in the Appropriate Product Section on the Website.

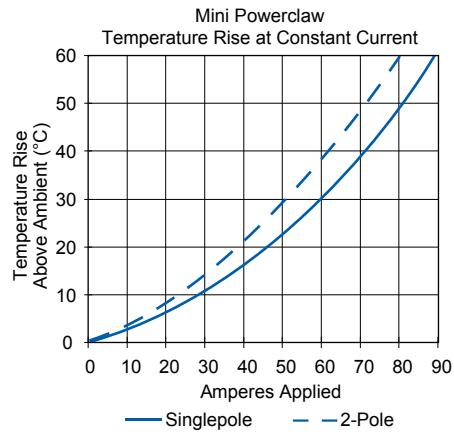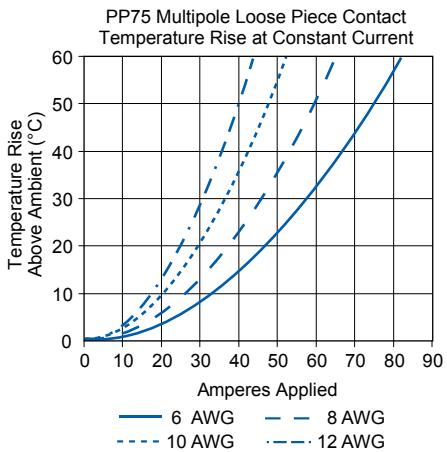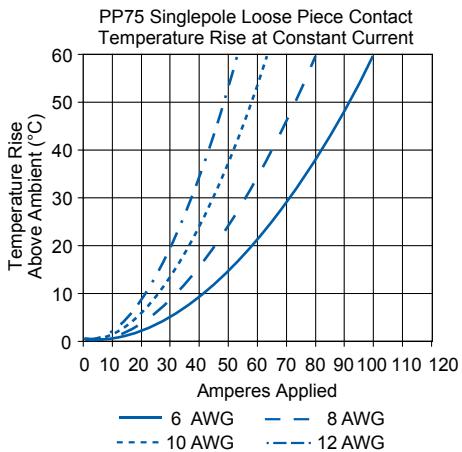

NOTE: Powerclaw charts are based on #8 AWG equivalent copper foil on board side, mated to #6 AWG conductor on wire side.

| PP75 SPECIFICATIONS |

Electrical		
Current Rating Amperes ¹	UL 1977	CSA
Wire to Wire (6 AWG)	120	70
Wire to PCB (6-AWG)	55	50
Wire to Busbar (6 AWG)	75	
Voltage Rating AC/DC		
UL 1977	600	
PCB Connector Recommended Voltage ³ per IEC 60950-1 Table 2L Pollution Degree ²		
Mini Vert. Contact Adjacent Poles	220	
Mini Horiz. Contact Adjacent Poles	200	
Standard Contact Adjacent Poles	635	
Dielectric Withstanding Voltage		
Volts AC	2,200	
Avg. Mated Contact Resistance Milliohms ¹		
Wire Contact with 1 1/4" of #6 AWG	0.200	
PCB Contact to Contact	0.500	
UL Hot Plug Current Rating Amperes - 250 cycles at 120V DC ⁶		
Wire- wire	50A	
PCB- wire (Vertical Mini Powerclaw)	40A	
UL Ground Short Time Current Test - 75A Premate Ground		
1530 Amps, #6 AWG Wire	6 Seconds	
Materials		
Housing		
Standard Plastic Resin	Polycarbonate	
Chem. Resistant Resin	Polycarbonate / PBT blend	
Contact Retention Spring	Stainless Steel	
Housing Flammability Rating		
UL94	V-0	
Glow Wire	960°C (GWFI) / 800°C (GWIT)	
Contact		
Base	Copper Alloy	
Wire Plating	Silver	
PCB Plating	Sn or Ag over Ni	
Contact Termination Methods		
Crimp ⁴	Wire Contacts	
Hand Solder	Wire and PCB Contacts	
Solder Dip*	PCB Contacts	
Wave Solder*	PCB Contacts	
Wrench / Socket	Busbar Contacts	

NOTE 1: See IEC 60664-1 for working voltage.

NOTE 2: Amp ratings are stated per position and based on all positions being fully loaded.

¹ Based on: 105°C rated or better cable of the largest size, Properly calibrated APP recommended tooling, and a 25°C ambient temperature. UL rating not to exceed the maximum operating temperature. CSA rating below a 30°C temperature rise.² Limited by the thermal properties of the connector plastic housing.³ Without use of spacers to increase creepage and clearance distances.⁴ Use APP recommended tooling only. Alternate tools may adversely affect the performance of our connectors along with UL and CSA recognition.⁵ Tested with contact part number 5900.⁶ Based on 2 housings blocked together.© CSA Certified
File No. LR25154

IEC INFORMATION

Connector Series	Configurations		Creepage / Clearance per IEC 60950-1	Material Group
PP75	Single Pole	Unmated	2.97 mm	IIIa
		Mated	2.97 mm	
	Stacked Powerpole®	Unmated	2.97 mm	
		Mated	2.97 mm	

Attributes	PP75
AMP Rating AC/DC	75
Voltage Rating AC/DC (Steady State)	250 V AC/DC (Operational)
Breaking Capacity -AMP Rating /Cycles	75 Amp / 10 Cycles
Voltage Rating (Breaking Capacity)	220 VDC
FINGER Safety - Mated only	IEC 60529 - IP20
Wire Size tested	16 mm ²
Contact Series Tested	5900
Climatic Testing (Cold,Heat & MFG)	IEC 60512 Test -11j, 11i & 11g,
Cycle Life	IEC 60512 Test 9a - 5000 Cycles
Mechanical Strength Impact	IEC 60512-5 @ 29.5 Inches - dropped 8 times
Temperature Range	-20 °C to 105 °C -4 °F to 221 °F

Protection

Touch Safety with Wire Contacts
IEC 60529 IP10




NOTE 3: Refer to the Constructional Data form for additional information on our website., www.andersonpower.com

POWERPOLE® PP75 ACCESSORIES |

Strain Relief Grommets

Use for strain relief in the back side of a PP75 housing. Wire gauge given for reference only, use grommet ID and wire OD to determine suitability in the end application.


Description	- Part Numbers -	Dimensions	
		- A -	inches mm
Minimum Quantity ...	100		
#6 AWG, Black	114411P2	0.35	8.89
#8 AWG, Black	114411P1	0.25	6.35
#10 - 12 AWG, Black	114411P3	0.17	4.32



Mounting Wing for Standard or CR Housings

Mounting wings can be used to secure dovetailed Powerpole® 75 series housings by passing fasteners through the wings in either a horizontal or vertical orientation. Useful for sheet metal panels, printed circuit boards, and many other mounting surfaces. Fasteners not included.


Description	----- Part Numbers -----
Minimum Quantity ...	1,000 100 ...
Blue, Round Hole	1399G20-BK 1399G20
Blue, Oval Hole	1399G7-BK 1399G7



Mounting Wing for Locking Housings

Mounting wings can be used to secure Powerpole® 75 series housings with locking dovetails by passing fasteners through the wings in either a horizontal or vertical orientation. Useful for sheet metal panels, printed circuit boards, and many other mounting surfaces. Fasteners not included.


Description	----- Part Numbers -----
Minimum Quantity ...	1,000 100 ...
Blue, Oval Hole	75LOKWNGBLU-BK 75LOKWNGBLU
Blue, Round Hole	75LOKWNGBLU-R-BK 75LOKWNGBLU-R

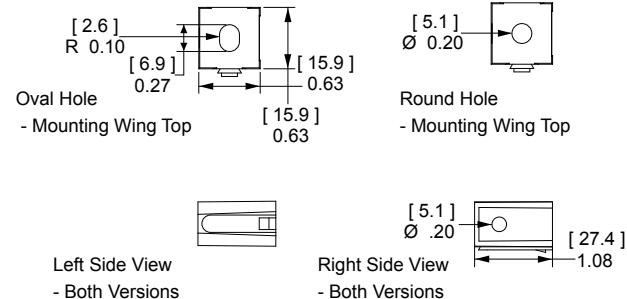

Surface Mount for Locking Housings

Use to secure Powerpole® 75 series housings with locking dovetails to a flat surface. Useful for sheet metal panels, printed circuit boards, and many other mounting surfaces. Fasteners not included.


Description	----- Part Numbers -----
Minimum Quantity ...	1,000 100 ...
Blue	75LOKSMTBLU-BK 75LOKSMTBLU

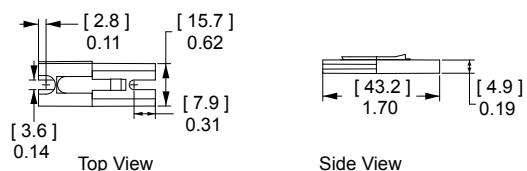

Spacer

Use to separate housings under high power to minimize power capability derating due to heat rise. They are recommended for squaring off a block of Powerpole® 75 housings to enable mounting accessories or retaining pins to be used. Combining long and short spacers opposite each other in a mated block adds keying features, or use two short spacers to avoid interference.


Description	----- Part Numbers -----
Minimum Quantity...	1000 100 ...
Red, Short	1399G23-BK 1399G23
Red, Long	1399G21-BK 1399G21

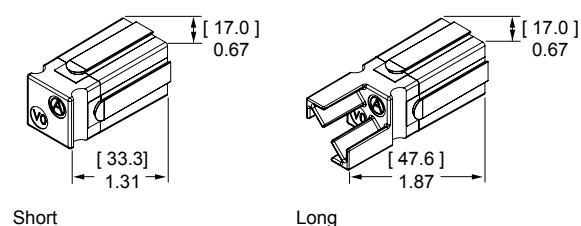

Guide Housings for Vertical Mini Powerclaw Contacts

Prevents polarity being reversed when a two pole PP75 block is mated to vertical mini Powerclaw contacts. Fastening hardware not included.


Description	Part Numbers		
Minimum Quantity ...	1,000	100	...
Black Guide Housing	PC-HSG-PP-BK	PC-HSG-PP	



Mounting Clamp

Mounting clamps can be used for fastening a block of Powerpole® 75 series housings to a panel. Connector blocks must be a complete square for the clamps to work properly. Fastening hardware not included.

Description	- Part Numbers -
Minimum Quantity ...	50 sets of 2 ...
2 or 4 Pole	1463G1
3 or 6 Pole	1463G2

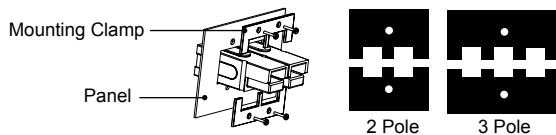


Retaining Pins

Retaining pins are used to keep stacked Powerpole® 75 series housings from separating.

Retaining pins are inserted in the circular opening between two housings stacked side by side.

Dimension B is +/- 0.015 in or 0.38 mm.



Description	-----	Part Numbers -----	Dimensions			
			- A -		- B -	
Minimum Quantity ...	1,000	100	inches	mm	inches	mm
1 Block High	111812P7	110G19	0.196 / 0.207	4.98 / 5.26	0.560	14.220
2 Block High	111812P6	110G18	0.196 / 0.207	4.98 / 5.26	1.000	25.400



PCB Mounting Staples

Reduce strain on solder joints during mating and unmating. Staples bend over the underside of the PCB board to lock the housings in place. Staples are an interference fit with housings.

-----	Number of Stacked Powerpoles®
--- Part Numbers ---	H x W
Minimum Quantity	100
PCSTAPLE-2	1 x 2

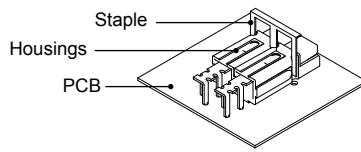


Fasten the staple by bending the leads on the bottom of the board.

Reducing Bushings

Use with contact part number 5900-BK or 1307-BK to allow a smaller wire to be used with the connector. Electrical capability is derated with smaller wire.

Contact Barrel Size	Wire Size	-----	Part Numbers	Dimensions			
Minimum Quantity	3,000	1,000	100	inches	mm	Length -
#6 AWG [13.3 mm ²]	#8 AWG [8.4 mm ²]	-	5912-BK	5912	0.18	4.57	0.45
#6 AWG [13.3 mm ²]	#12- 10 AWG [3.3- 5.3 mm ²]	5910-BK	-	5910	0.14	3.56	0.47
#6 AWG [13.3 mm ²]	#16- 14 AWG [1.3- 2.1 mm ²]	5913-BK	-	5913	0.09	2.29	0.47
				Length -			
				inches	mm	Inches	mm



For environmentally sealed connector shells to hold Powerpole® 15-180 connectors, see SPEC Pak® product series on our website, www.andersonpower.com



Powerpole® - Tooling Information

Wire Size		Reeled Part Numbers		Reeled Contact Crimp Tool	
AWG	mm ²	Tin Plating	Silver Plating	APP Applicator	APP Press
PP15 / 45 Flat Wiping Power & Ground					
#16 / 20	1.3 / 0.52	262G1	262G2	TD0101 115V= TE0101 230V = TE0102	
#16 / 20	1.3 / 0.52	269G2	N/A		
#12 / 16	3.3 / 1.3	261G1	N/A		
#10 / 14	5.3 / 2.1	261G2	261G3		
#12 / 16	3.3 / 1.3	269G1	N/A		
#10 / 14	5.3 / 2.1	269G3	N/A		
#10 / 14	5.3 / 2.1	200G1L	200G3L		
#10 / 14	5.3 / 2.1	201G1H	N/A		
#10 / 14	5.3 / 2.1	1830G1	1830G2	TD0102	

* APP applicators are mechanical feed style and do not require an air feed kit.

Wire Size		Loose Piece Part Numbers		Loose Piece Contact Crimp Tool						
AWG	mm ²	Tin Plating	Silver Plating	Hand Tool	Pneumatic Tool	Die	Locator	Number of Crimps		
PP15 / 45 Flat Wiping Power & Ground										
#16 / 20	1.3 / 0.52	N/A	1332	1309G2 or 1309G8	N/A	N/A	N/A	Single		
#12 / 16	3.3 / 1.3	N/A	1331							
#16 / 20	1.3 / 0.52	262G1-LPBK	262G2-LPBK							
#16 / 20	1.3 / 0.52	269G2-LPBK	N/A							
#12 / 16	3.3 / 1.3	261G1-LPBK	N/A							
#10 / 14	5.3 / 2.1	261G2-LPBK	261G3-LPBK							
#12 / 16	3.3 / 1.3	269G1-LPBK	N/A							
#10 / 14	5.3 / 2.1	269G3-LPBK	N/A							
#10 / 14	5.3 / 2.1	200G1L-LPBK	200G3L-LPBK	1309G6 or 1309G8	N/A	N/A	N/A	Single		
#10 / 14	5.3 / 2.1	201G1H-LPBK	N/A							
310 / 14	5.3 / 2.1	1830G1-LPBK	1830G2-LPBK							
PP75										
#6	13.3	N/A	1307	1309G4	1387G1	1388G6	1389G6 1389G21 1389G6 1389G21	Single		
#8	8.4		5900							
			1875G1							
			5952							
			1875G2							
			5953							
			5915							
			1875G3							
PP120										
1/0	53.5	N/A	1323G2	1368 Series	1387G1	1388G3	1389G4	Single		
#1	42.4		1323G1							
#2	33.6		1319			1388G4				
#4	21.2		1319G4							
#6	13.3		1319G6							
PP180										
3/0	85	N/A	1328G2	1368 Series	1387G2	1303G12 1303G13	1304G32	Double		
2/0	53.5		1328G1							
1/0	53.5		1382							
#1	42.4		1347							
#2	33.6		1383		1387G1	1388G4	1389G3			
#4	21.1		1384							
#6	13.3		1348							

1. NOTE: See website for the most current information.

2. NOTE: Insertion / Extraction tool for PP15/45 contacts = 111038G2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anderson Power Products:

[262G1](#) [262G2-LPBK](#) [269G1](#) [269G2](#) [5900](#) [5900-BK](#) [5915](#) [5915-BK](#) [5952](#) [5952-BK](#) [5953](#) [5953-BK](#) [75BBS](#)
[PC5933S](#) [PC5933T](#) [PC5933T-BK](#) [PC-BLK-S-SB](#) [110G18](#) [114411p1](#) [114411p3](#) [1399G20](#) [1399g20-bk](#) [1399g7](#)
[1399G7-BK](#) [1463G1](#) [1463G2](#) [5916](#) [5916-BK](#) [5916G14](#) [5916G15](#) [5916G16](#) [5916G17](#) [5916G4](#) [5916G4-BK](#)
[5916G5](#) [5916G5-BK](#) [5916G6](#) [5916G6-BK](#) [5916G7](#) [5916G7-BK](#) [75LOKBLK](#) [75LOKBLU](#) [75LOKGRN](#) [75LOKRED](#)
[75LOKWNGBLK-R](#) [75LOKWNGBLU](#) [75LOKWNGBLU-R](#) [PC-HSG-PP](#) [PC-HSG-PP-BK](#) [PCSTAPLE-2](#) [1388G6](#)
[1389G6](#) [5916G21-BK](#) [5916G14-BK](#) [5916G16-BK](#) [5916G15-BK](#) [75LOKBLK-BK](#) [75LOKSMTBLU-BK](#) [75LOKGRA-BK](#)
[75LOKWNGBLU-BK](#) [75LOKGRN-BK](#) [75LOKWNGBLU-R-BK](#) [75LOKRED-BK](#) [75LOKBLU-BK](#) [75LOKWHT-BK](#)
[P5916-BK](#) [P5916G5-BK](#) [P5916G7-BK](#) [P5916G4-BK](#) [1399G23](#) [1875G3](#) [1875G1](#) [5927G6](#)