


(2.54 mm) .100"

SMT .025" SQ POST HEADER

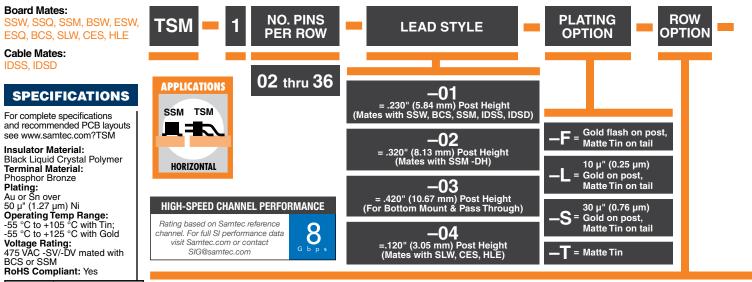

MATES	CURRENT RATING (PER PIN)
TSM/SSW	4.7 A
TSM/SSM	5.4 A
TSM/HLE	4.1 A
2 PINS POWERED	

PROCESSING

Lead-Free Solderable: Yes -DH/-SH Lead Coplanarity: (0.15 mm) .006" max (02-36)* -DV/-SV Lead Coplanarity: (0.10 mm) .004" max (02-05) (0.13 mm) .005" max (06-10)* (0.15 mm) .006" max (11-36)* *(.004" stencil solution may be available; contact IPG @ samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

FILE NO. E111594


ALSO AVAILABLE (MOQ Required)

- Edge Mount and Locking Clips for –SV
- Solder Locks for –DH and Shrouds for –DV
- Other platings


Note:

Some lengths, styles and options are non-standard, non-returnable.

-SV = Single Row Vertical Pin

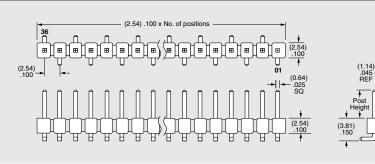

-SH = Single Row Horizontal Pin

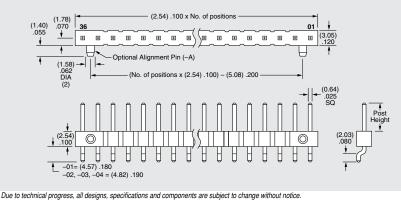


All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.




TSM-115-01-T-SH-A





TSM SERIES

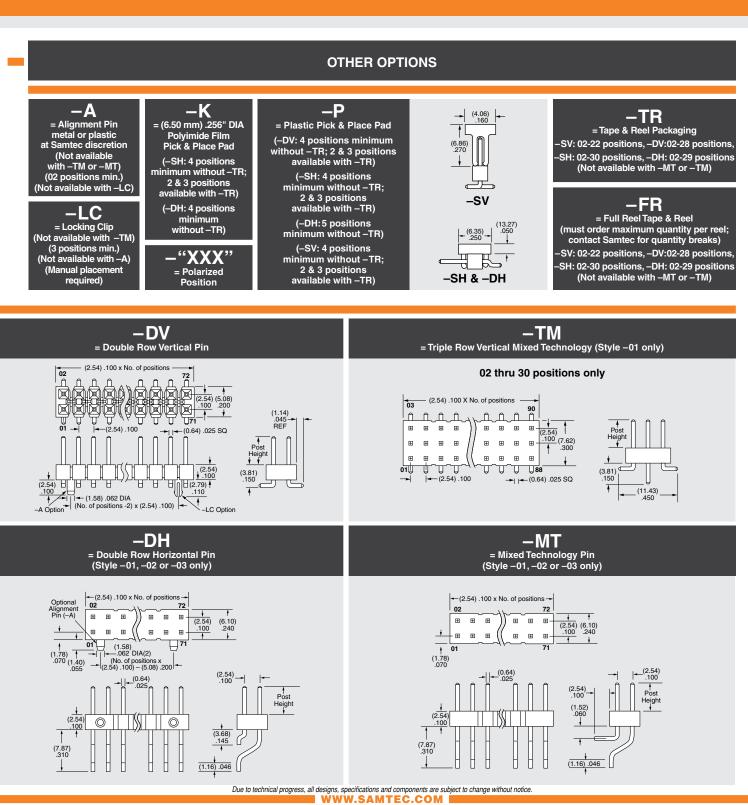

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec: TSM-102-01-H-SV