

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

1997

© COPYRIGHT 1997


ALL RIGHTS RESERVED.

PN 1-1,2-1,3-1,4-1,5-1,1-2,2-2,3-2
4-2,5-2,6-1,4-3,1-8,2-8,3-8,4-8,5-8,
4-9,2-9,3-9,4-9 & 5-9

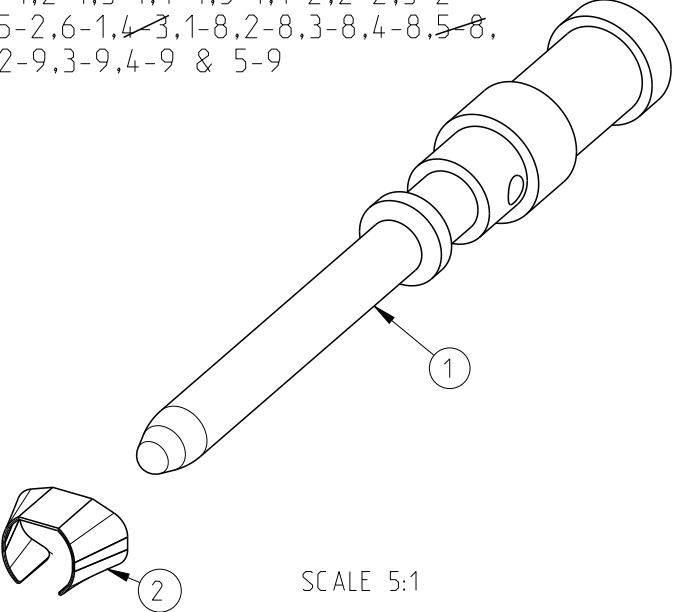


SCALE 5:1

PN 1-1,2-1,3-1,4-1,5-1,1-2,2-2,3-2
4-2,5-2,6-1,4-3,1-8,2-8,3-8,4-8,5-8,
4-9,2-9,3-9,4-9 & 5-9

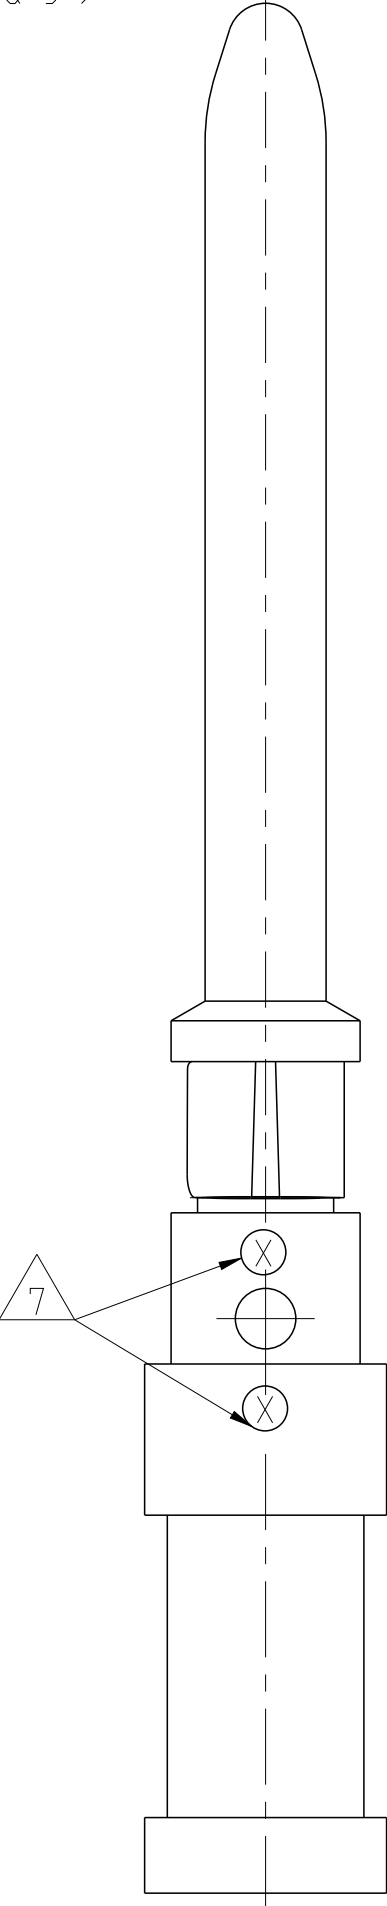

SCALE 5:1

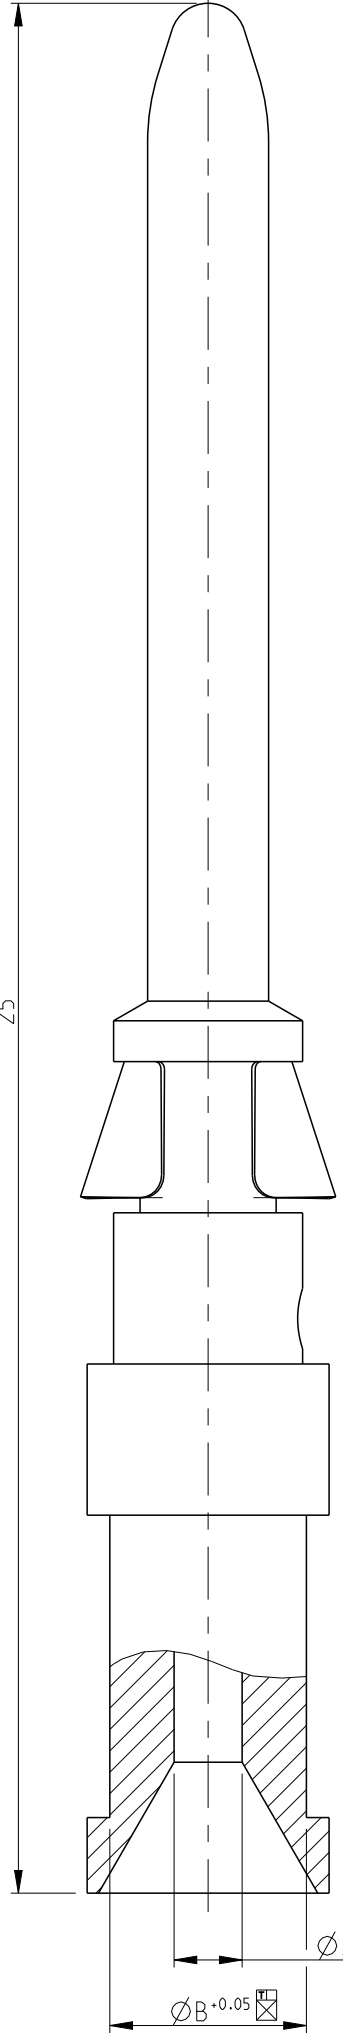

SCALE 5:1

LOC
A

DIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B13	Released As per ECR-09-005436	9-Mar-2009	CJ	TS
	B14	ECR-11-002636	05APR2011	SR	AR
	B15	REVISED PER ECR-16-016780	19AUG2017	NG	MKO

NOTES

1

MATERIAL SEE TABLE

2

SURFACE SEE TABLE

3

ASSEMBLY WEIGHT SEE TABLE

4

PACKAGING: 50 PIECES IN POLY-BAG 0-1243085-8

5

PACKAGING: 500 PIECES IN POLY-BAG 0-1243085-8


6

PACKAGING: 10 PIECES IN POLY-BAG 0-1243085-8

7

CROSS-SECTION MARKING

PN 1-1,2-1,3-1,4-1,5-1,1-2,2-2,3-2
4-2,5-2,6-1,4-3,1-8,2-8,3-8,4-8,5-8,
4-9,2-9,3-9,4-9 & 5-9

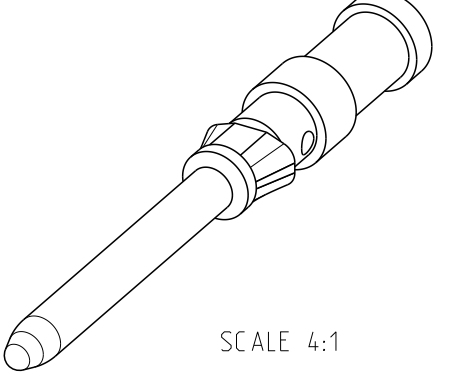


SCALE 4:1

OB SO LETE	OB SO LETE	OB SO LETE	1	1	1	1	1	1	OB SO LETE	1	1	1	1	1	Catch Spring	3	1	2	7			
1	1	1													Pin Contact 1.5 mm ²	0.00062	Stainless Steel	Ag/Ni	1.8	3.0	4	
	1														Pin Contact 4.0 mm ²	0.00059	Ms/Brass	Ag/Ni	2.4	3.2	6	
				1											Pin Contact 2.5 mm ²	0.00067	Ms/Brass	Au	2.2	3.2	5	
					1										Pin Contact 1.5 mm ²	0.00067	Ms/Brass	Au	1.8	3.0	4	
						1									Pin Contact 0.75-10 mm ²	0.00063	Ms/Brass	Au	1.45	2.6	3	
							1								Pin Contact 0.5 mm ²	0.00062	Ms/Brass	Au	1.1	2.6	2	
								1							Pin Contact 0.14-0.37 mm ²	0.00061	Ms/Brass	Au	0.9	2.6	1	
									1						Pin Contact 2.5 mm ²	0.00065	Ms/Brass	Ag/Cu	2.2	3.2	5	
										1					Pin Contact 1.5 mm ²	0.00067	Ms/Brass	Ag/Cu	1.8	3.0	4	
											1				Pin Contact 0.75-10 mm ²	0.00063	Ms/Brass	Ag/Cu	1.45	2.6	3	
												1			Pin Contact 0.5 mm ²	0.00062	Ms/Brass	Ag/Cu	1.1	2.6	2	
OB SO LETE		1													Pin Contact 0.14-0.37 mm ²	0.00061	Ms/Brass		0.9	2.6	1	
OB SO LETE			1												Pin Contact 0.14-0.37 mm ²	0.00065	Fe	Au	0.9	2.6	1	
														1	Pin Contact 0.14-0.37 mm ²	0.00067	Ms/Brass	Ag/Cu	0.9	2.6	1	
4-3	6-1	1-4	1-3	5-2	4-2	3-2	2-2	1-2	5-1	4-1	3-1	2-1	1-1		DESCRIPTION	WEIGHT IN (Kg)	MATERIAL	SURFACE	ØA	ØB	CROSS SECTION MARKING	POS
				5-9	4-9	3-9	2-9	1-9	5-8	4-8	3-8	2-8	1-8									
HN.D-C-SSti-Ag/Ni-1.5 mm ²	HN.D-C-SSti-Ag/Ni-4.0 mm ²	HN.D-C-SSti-CuNi-0.14 -0.37 mm ²	HN.D-C-SSti-Fe-Au-0.14 -0.37 mm ²	HN.D-C-SSti-Au-2.5 mm ²	HN.D-C-SSti-Au-1.5 mm ²	HN.D-C-SSti-Au-0.75-1.00 mm ²	HN.D-C-SSti-Au-0.5 mm ²	HN.D-C-SSti-Au-0.14 -0.37 mm ²	HN.D-C-SSti-Ag-2.5 mm ²	HN.D-C-SSti-Ag-1.5 mm ²	HN.D-C-SSti-Ag-0.75-1.00 mm ²	HN.D-C-SSti-Ag-0.5 mm ²	HN.D-C-SSti-Ag-0.14 -0.37 mm ²									

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

ISO 8072
DIN 150
DIN 1501-120
0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±°

2

DWN
Braun
23.07.1997

CHK
Schnurpfeil
23.07.1997

APVD
-

PRODUCT SPEC
108-74018

APPLICATION SPEC
114-74015

WEIGHT
-

CUSTOMER DRAWING

NAME
PIN CONTACT
SERIES HN.D

SIZE
A2

CAGE CODE
100779

DRAWING NO
C-1105050

RESTRICTED TO
-

SCALE
10:1

SHEET
1

OF
1

REV
B15

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1105050-2](#)