




This document is the property of Amphenol Corporation and is delivered on the understanding that it is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior consent, in writing, of Amphenol Corporation. It is to be used only for the purpose for which it is issued.

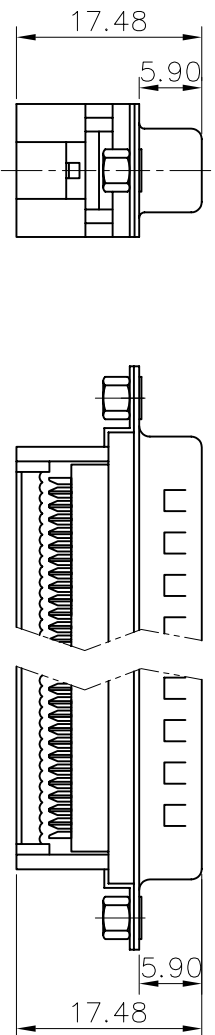

Strain Relief

Customer drawing

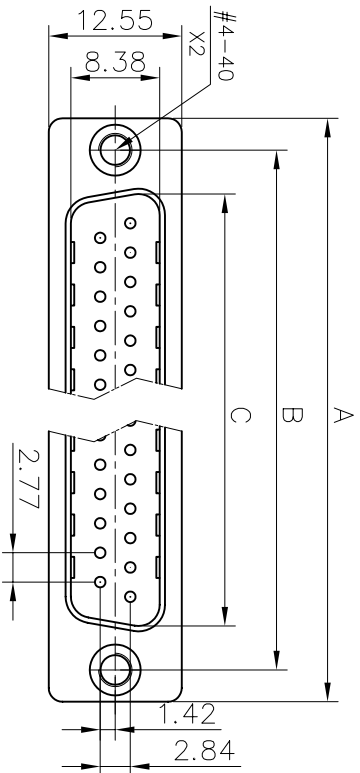

Nb OF CONTACTS	A	B	C
09	30.84	24.99	16.92
15	39.24	33.32	25.50
25	53.04	47.04	38.96
37	69.32	63.50	55.42

REVISONS			
S/N	ECN	DESCRIPTION	DATE
1			11/28/08

D-SUB TECHNICAL DATA

- SHELL : Steel,100u"min tin over 50u"min nickel
BODY : Glass filled thermoplastic.
CONTACTS : Flame retardant to UL94 V-0 color black
CONTACTS : Brass, 30u" min. gold over 1.25um (50u") min nickel on mating area, 100u" min.tin over 50u" min. nickel
REAR INSERT : Brass, nickel plated.
ELECTRICAL : Voltage rating : 250 V RMS at 60 Hz.
CLIMATIC : Current rating 5A
CLIMATIC : Insulation resistance >1000 M Ohms
CLIMATIC : Contact resistance 20 mOhms max.
MARKING : Temperature range -55°C up to 125°C
MARKING : Amphenol...(Series No.)
MARKING : Commercial reference
MARKING : Manufacturing date

PRODUCT CODE

L 17DXFRDAXXP C309



DIMENSIONS SPECIFIED UNLESS OTHERWISE SPECIFIED			
TOLERANCES	U.S.	METRIC	APPROVAL
DRAWN	0.4	0.4	DATE
CHECKED	0.30	0.30	DATE
FOR MATERIALS AND FINISHES	0.20	0.20	DATE
SEE NOTES	2'	2'	DATE
REMOVE SHARP EDGES			DATE
DIMENSIONS			DATE
THICKNESS			DATE
WIRE			DATE
ANGLE OF PROJECTION			DATE
SIZE	A4	C	17DXFRDAXXP C309
SCALE	NONE		REV. 1