


NOMINAL VOLTAGE	28 VDC
CURRENT RATING-CONTINUOUS	200 AMP
15 SEC	1000 AMP
1 MIN	500 AMP
5 MIN	300 AMP
INTERRUPTING CAPACITY	4500 AMP
REVERSE CURRENT SETTING	6-17 AMP
OVER A VOLTAGE RANGE	27.5±2.5 VDC
CALIBRATED AT	12±1 AMP RC AT
	28 VDC & 25±5°C
DIFFERENTIAL VOLTAGE FOR PICKUP	.85±.15 V

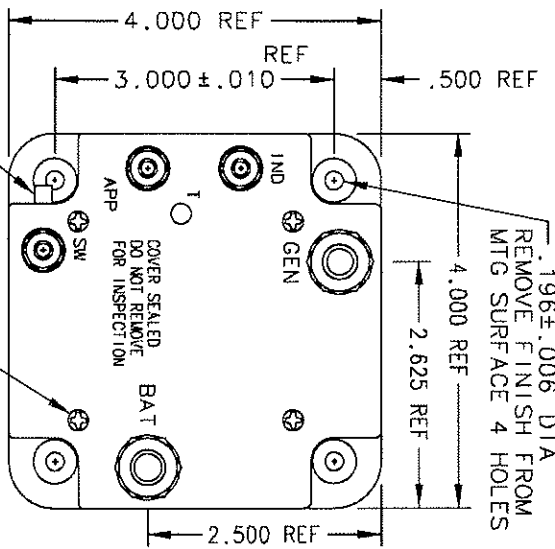


(LOCATION OPTIONAL)

10-32 UNF-2A STUD
3 STUDS REQ'D

3/8-24 UNF-2A STUD
2 STUDS REQ'D

(2)
(4)

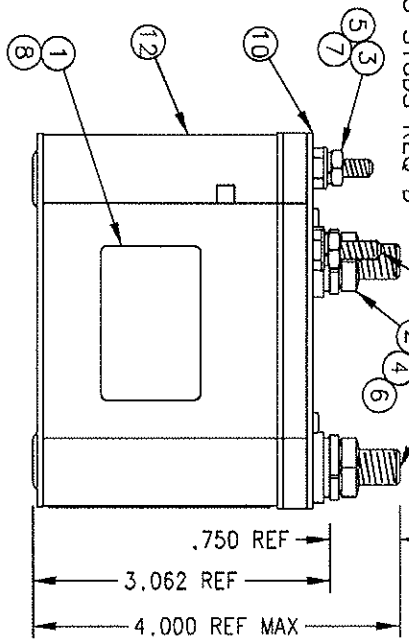

- | | | | | |
|----|---|----|---|---|
| 1. | THIS UNIT MEETS THE APPLICABLE PORTIONS OF MIL-R-6106 | 12 | 1 | 1 |
| | | 11 | | |
| 2. | THIS UNIT SUPERSEDES A-700AO-1, -3, & -6. | 10 | 1 | |
| | | 9 | 4 | |
| | | 8 | 1 | 1 |
| | | 7 | | |
| | | 3 | | |

NOMENCLATURE OR DESCRIPTION	FSOI NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
-----------------------------	---------	--------------------------	------------------

[illegible]

CUTOFF - REVERSE CURRENT

HARTMAN ELECTRICAL MANUFACTURING
MANSFIELD, OHIO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[A700AQ4](#)