



LOC		DIST		REVISIONS					
FX		00		DESCRIPTION			DATE	DWN	APVD
		P	LTR	REVISED PER ECO-09-011983			19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1

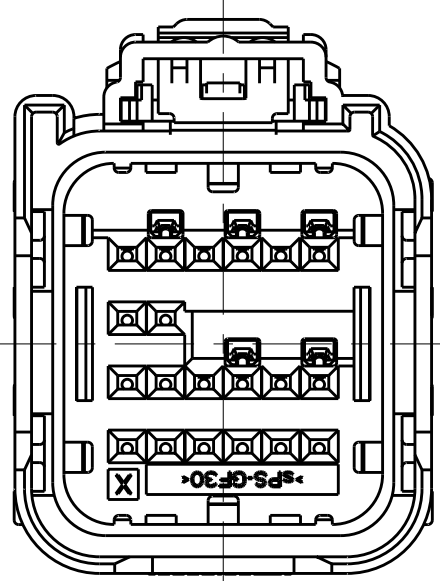


OPTION "A"

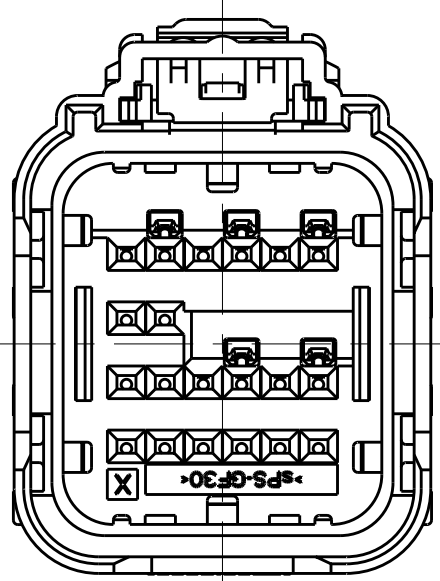


OPTION "B"

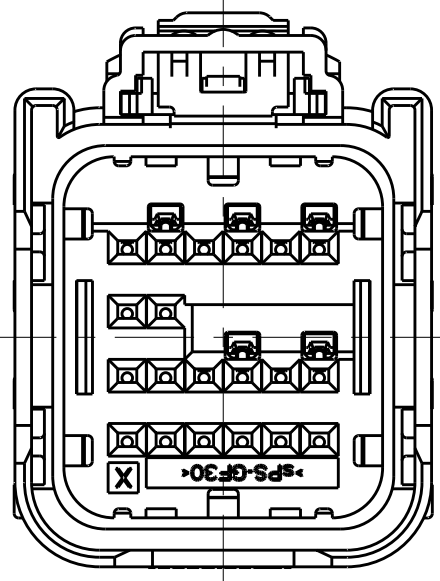


OPTION "C"

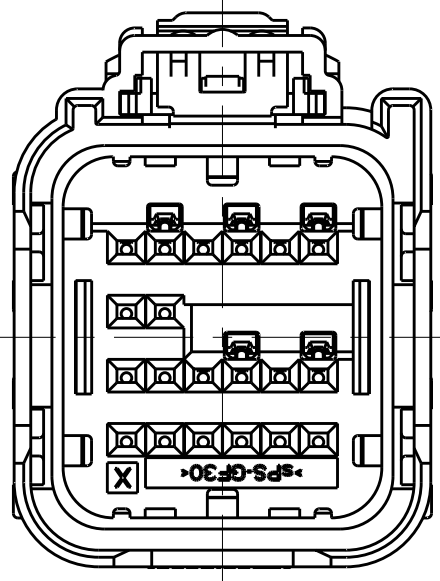



OPTION "D"

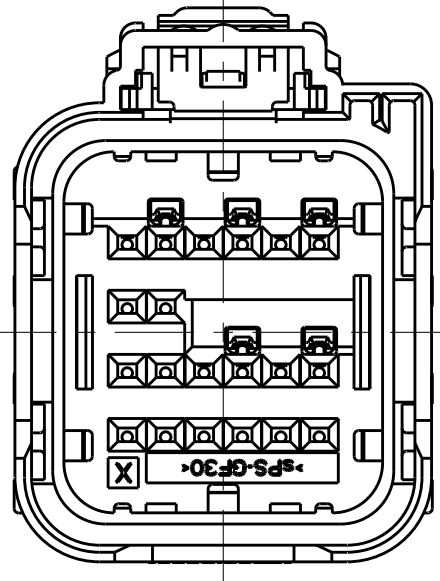

OPTION "E"

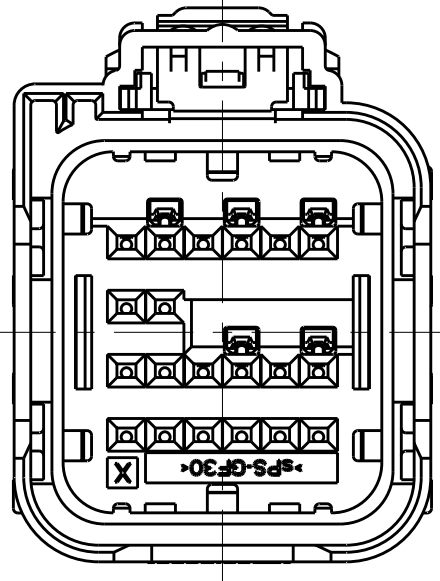



OPTION "F"

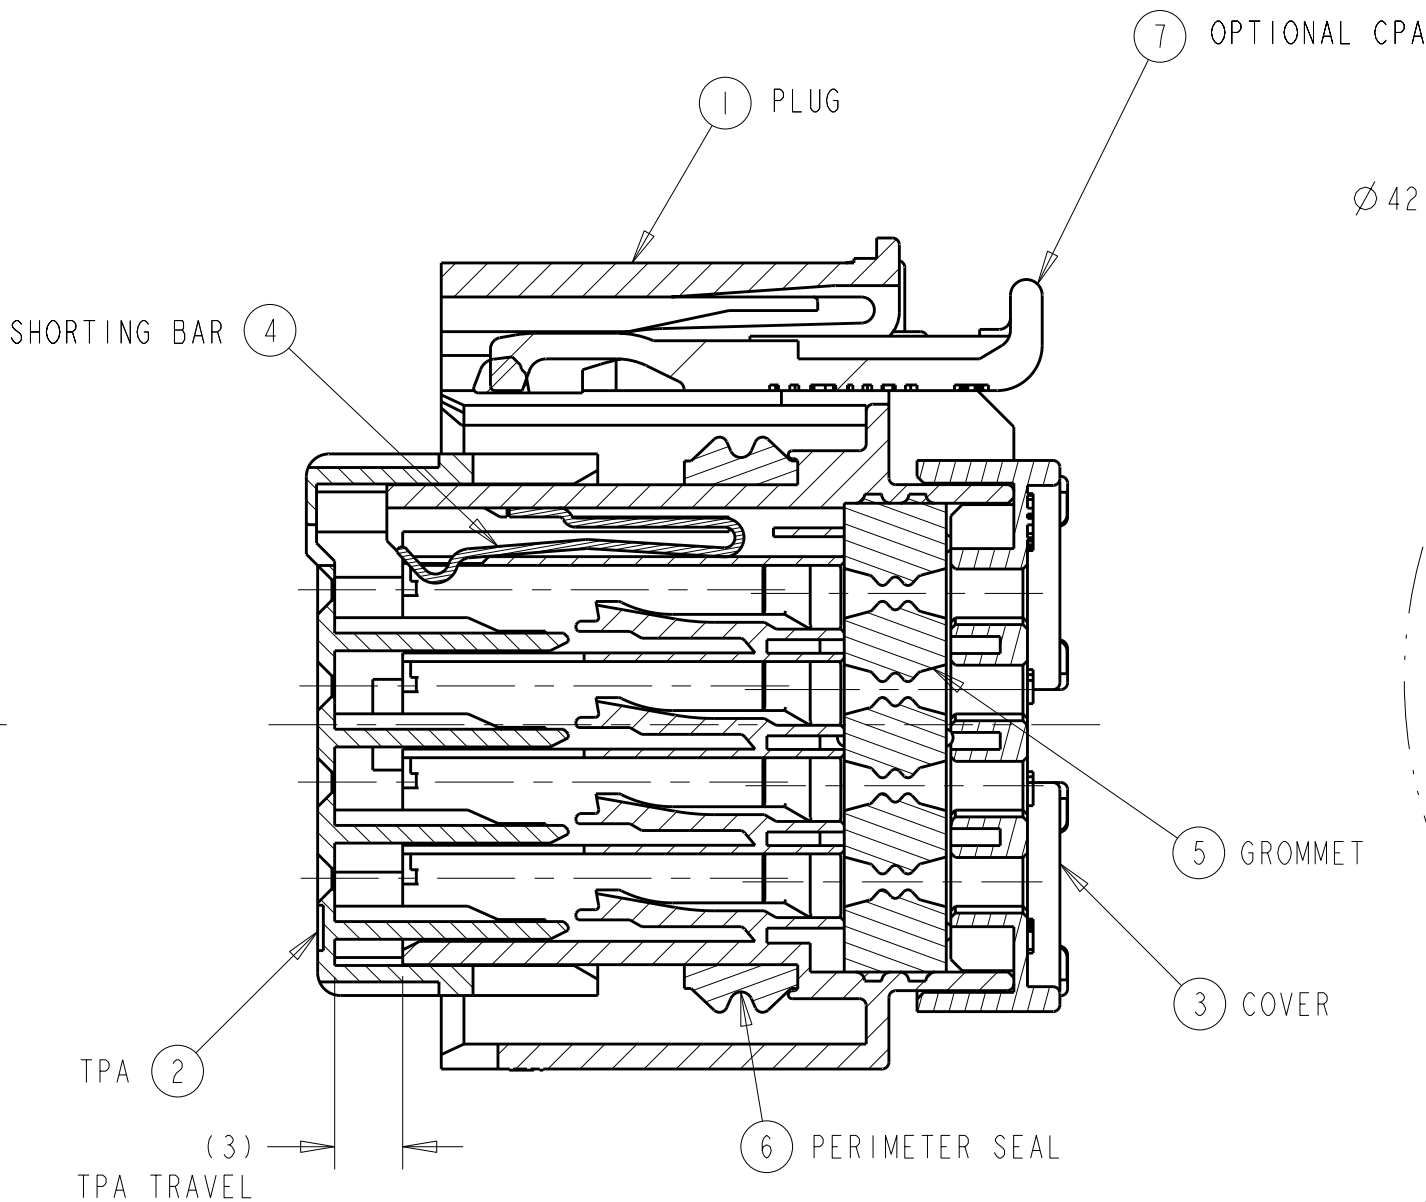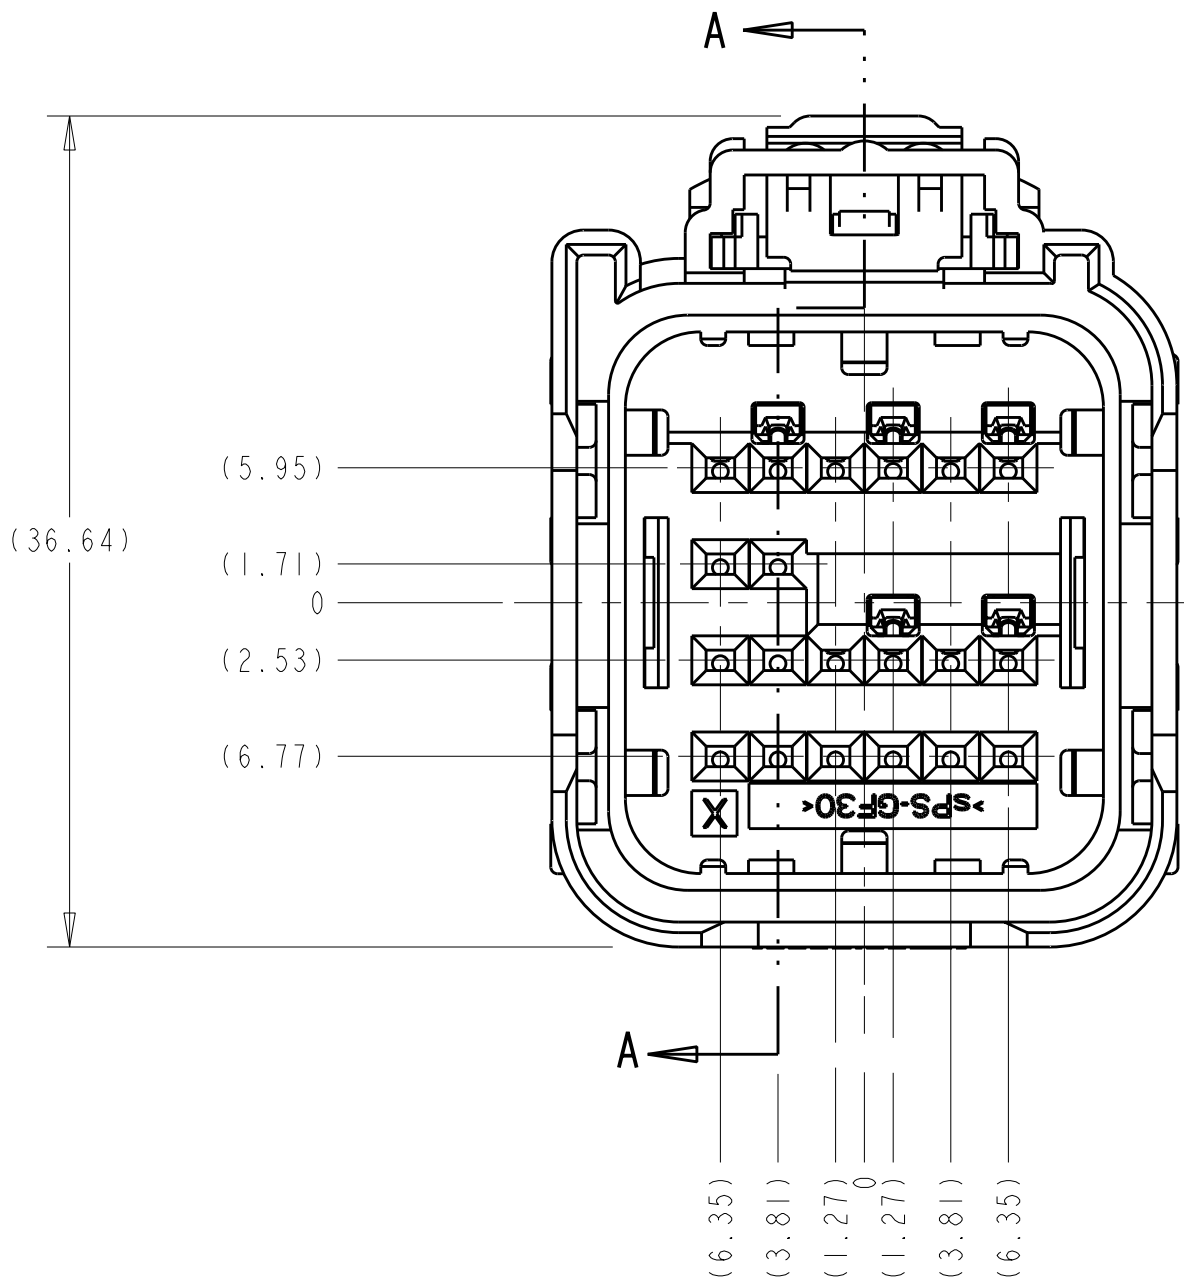


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

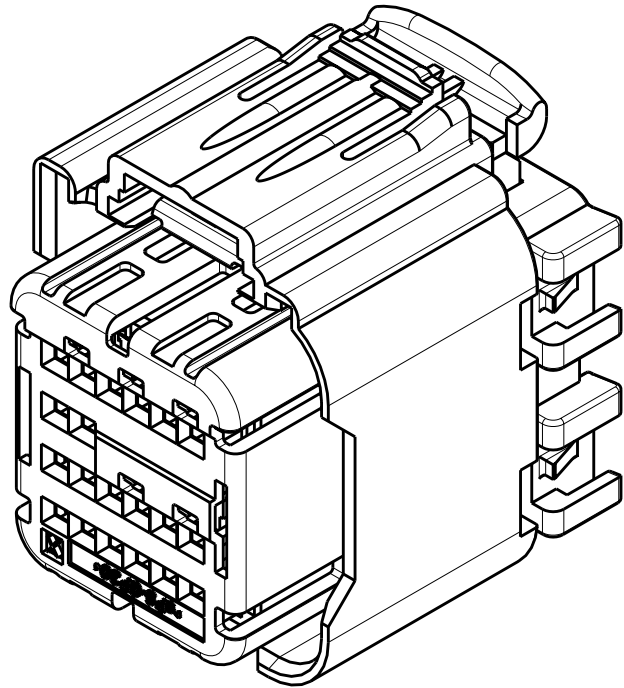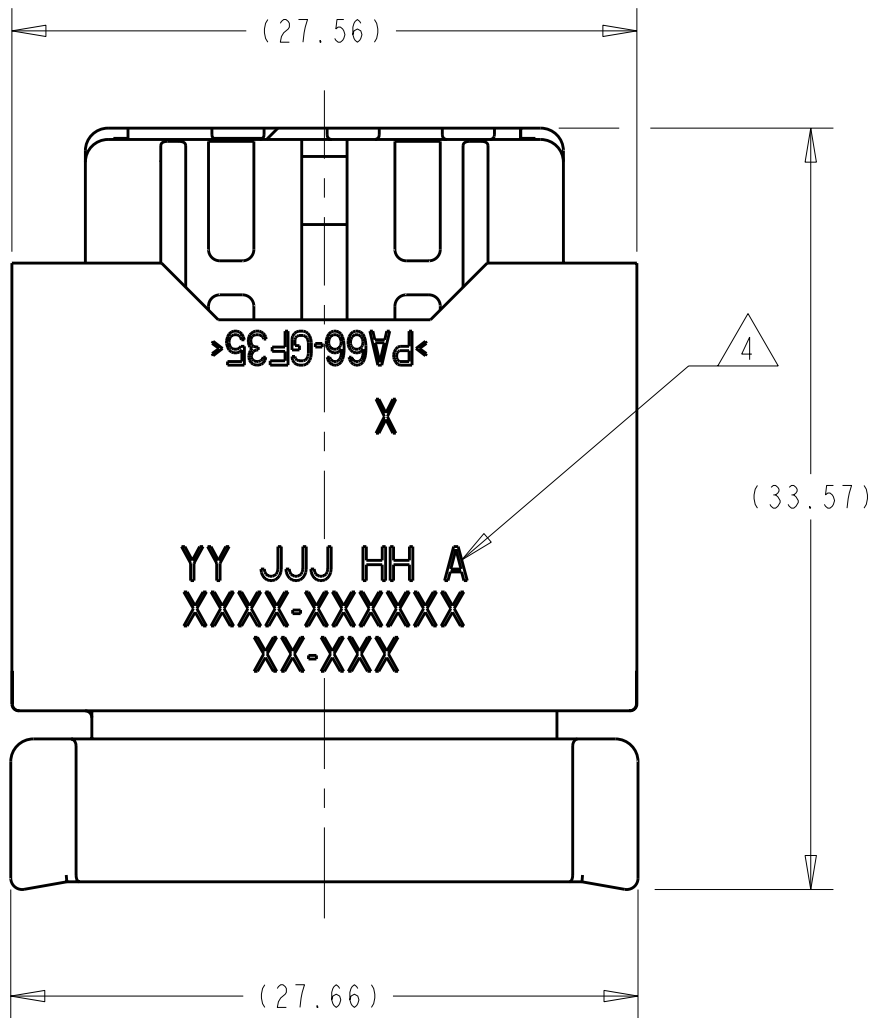

SCALE 2:1

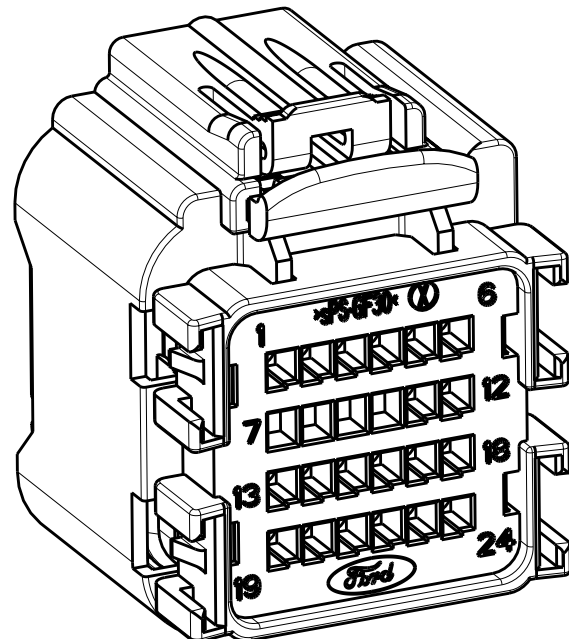

SCALE 2:1

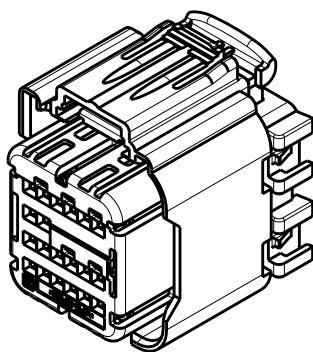

SCALE 1:1

KEYING OPTION "A" SHOWN

		SCALE 1:1		KEYING OPTION "A" SHOWN			
3-1924672-2	1924681-1			7	CPA	PBT-GF15	RED
1924680-1				6	PERIMETER SEAL	SILICONE	GREEN
3-1924672-4				5	GROMMET	SILICONE	BROWN
3-1924672-3				4	SHORTING BAR	S.S.	SEE COMPONENT DRAWING
3-1924672-2				3	COVER	PA66 35% GF	BLACK
5-1924670-1				2	SPACER FOR SHORTING BAR APPLICATIONS	sPS 30% GF	NATURAL
5-1924670-0				1	PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-9					PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-8					PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-7					PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-6							
4-1924670-5							
4-1924670-4							
4-1924670-3							
4-1924670-2							
4-1924670-1							
4-1924670-0							
3-1924670-9							
3-1924670-8							
3-1924670-7							
3-1924670-6							
3-1924670-5							
3-1924670-4							
3-1924670-3							
3-1924670-2							
1924671-5							
1924671-4							
1924671-3							
3-1924670-0							
3-1924672-9							
2-1924672-8							
2-1924672-7							
2-1924672-6							
2-1924672-5							
2-1924672-4							
2-1924672-3							
2-1924672-2							
2-1924672-1							
2-1924672-0							
1-1924672-9							
1-1924672-8							
1-1924672-7							
1-1924672-6							
1-1924672-5							
1-1924672-4							
1-1924672-3							
1-1924672-2							
1-1924672-1							
1-1924672-0							
1924672-9							
1924672-8							
1924672-7							
1924672-6							
1924672-5							
1924672-4							
1924672-3							
1924672-2							
1924672-1							
1924671-2							
2-1924670-8							
1924671-1							
2-1924670-7							
2-1924670-6							
2-1924670-5							
2-1924670-4							
2-1924670-3							
2-1924670-2							
2-1924670-1							
2-1924670-0							
1-1924670-9							
1-1924670-8							
1924670-7							
1924670-6							
1924670-5							
1924670-4							
1924670-3							
1924670-2							
1924670-1							
1-1924670-0							
1924670-9							
1924670-8							
1924670-7							
1924670-6							
1924670-5							
1924670-4							
1924670-3							
1924670-2							
1924670-1							
1924670-0							
QUANTITY				ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR

[illegible]AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1924670-2](#)