
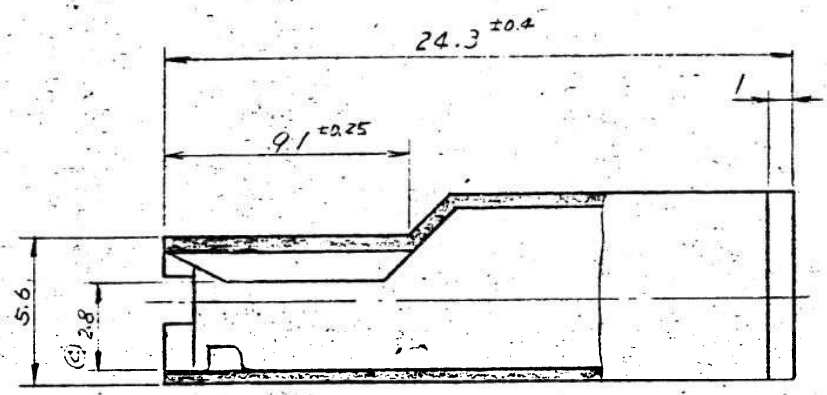


第三角法 (THIRD ANGLE PROJECTION)

© 1976 日本エー・エム・ピー株式会社

GENERAL TOLERANCE	
10 MAX.	± 0.2
10 OVER 30 MAX.	± 0.25
30 OVER 100 MAX.	± 0.3
角度 ANGLES	± 3°

REV	DESCRIPTION	DATE	DWN	APVD
F4	REVISED PER ECR-15-011167	29JUL2015	SC	BW

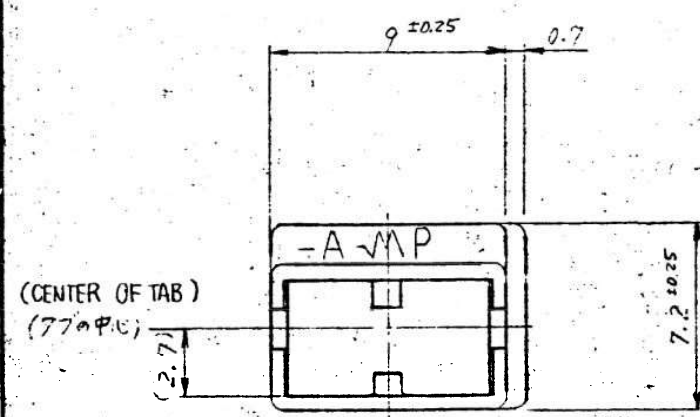

- 注)
- 適用コンタクトは型番 170233 又は 170234
 - 適用規格 108-5113

- NOTE:
- APPLICABLE CONTACT:
P/N 170233, 170234
 - PRODUCT SPEC No 108-5113
 - OBsolete PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

	炭灰色 LIGHT GRAY	6-171809-6
OBsolete	黒色 BLACK	△ 1-171809-2
	赤色 RED	171809-8
	黄色 YELLOW	7
	灰色 GRAY	5
OBsolete	青色 BLUE	5
△ OBsolete	緑色 GREEN	4
	茶色 BROWN	3
	黒色 BLACK	2
	白色 NATURAL	171809-1
	色 COLOR	型番 PART NUMBER

MATERIAL (材料) 耐熱性ナイロン樹脂 HEAT RESISTANT 66 NYLON △ 難燃性ナイロン樹脂 FLAME RETARDANT 66 NYLON	TOLERANCE (公差) EXCEPT AS NOTED	TE Connectivity	
FINISH (仕上げ) 色 (COLOR) SEE TABLE	DR. CHK. N1.3 DE. APP. 4/1/94	NAME (名称) 1 Pos. POSITIVE LOCK HSG. 1極 ポジティブロック ハウジング	
	SIZE (寸法) B J	LOC (位置) C	NO. (番号) 171809
	SCALE (縮尺) 4-1	REV. F4	SHEET 1

PRINT DIST 4 C ALL DIMENSIONS IN MM DO NOT SCALE PRINT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[171809-1](#)