

MINI® Blade Fuses Rated 32V

The MINI® Fuse is the standard for vehicle circuit protection. Its miniature design meets the need for more circuits to be protected while utilizing less space, and its ability to cope with high temperatures in adverse environments makes the MINI® Fuse of recommended choice for protection.

Specification

Interrupting Rating:

MINI

(Silver Plated)

1000A @ 32 VDC

Voltage Rating:

32 VDC

*Component Level Temperature Range:

-40°C to +125°C

**System Level Temperature Range:

-40°C to +105°C

105°C and 85°C are typical system level temperature requirements.

Terminals:

Ag plated zinc alloy

Housing Material:

PA66

Complies with:

SAE J2077, ISO 8820-3,

UL 248 Special Purpose Fuses

MINI Sn

(Tin Plated)

1000A @ 32 VDC

32 VDC

-40°C to +105°C

-40°C to +85°C

Sn plated zinc alloy

PA66

SAE J2077, ISO 8820-3

not UL recognized




Ordering Information

Part Number	Package Size
0297xxx.WXNV	3000
0297xxx.U	500
0297xxx.H	100
0297xxx.L	50
MINI® Sn Fuse	
0297xxx.WXT	3000

Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)
110	360,000 s / –
135	0.75 s / 600 s
200	0.15 s / 5 s
350	0.080 s / 0.500 s
600	0.030 s / 0.100 s

Time-Current Characteristic Curves

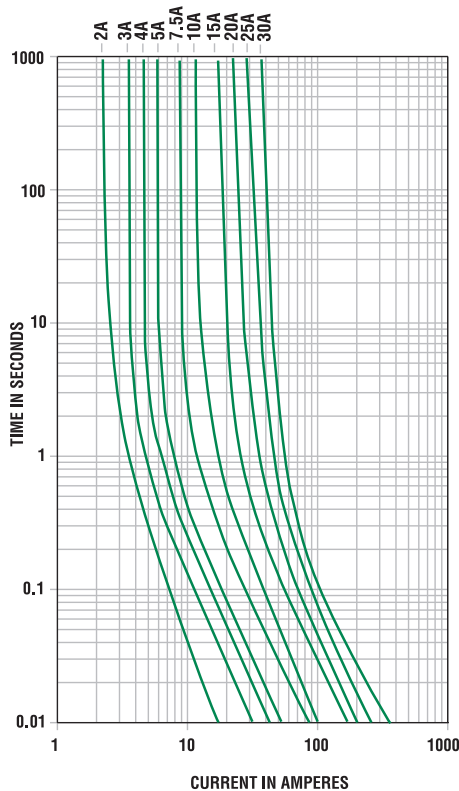


Component Level Temperature** = the maximum ambient temperature that a single fuse will survive. This does not factor-in the heat from a populated fuse box, but does include the heat from the current load with the proper rerating. *System Level Temperature** represents the ambient temperature of the fuse box at a location within the vehicle. The temperature within a populated fuse box (in a given location) will be higher. The limiting factor is the plating. Sn-plating's temperature limit is ~130°C, and Ag-plating allows up to 150°C at the terminal interface.

Ratings


Part Number	Current Rating (A)	Housing Material Color	Typ. Voltage Drop (mV)	Cold Resistance (mΩ)	I²t (A²s)
0297002._	2		171	55.60	2.8
0297003._	3		153	33.75	9.4
0297004._	4		121	23.48	17
0297005._	5		129	17.75	25
029707.5._	7.5		135	10.85	68
0297010._	10		108	7.42	93
0297015._	15		98	4.58	270
0297020._	20		96	3.21	380
0297025._	25		86	2.36	625
0297030._	30		87	1.85	1130

Dimensions

Dimensions in mm



Temperature Rerating Curve

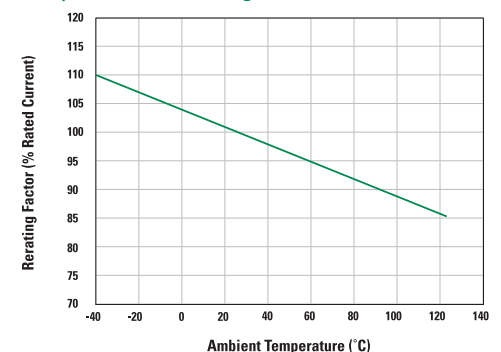

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[0MIN003.V](#) [0MIN015.V](#) [LMIN015.V](#) [0MIN004.V](#) [LMIN004.V](#) [0MIN07.5V](#) [LMIN07.5V](#) [LMIN002.V](#) [0MIN002.V](#)
[LMIN010.V](#) [0MIN010.V](#) [0MIN030.V](#) [LMIN030.V](#) [297004](#) [297002](#) [297003](#) [297005](#) [29707.5](#) [297010](#) [297015](#)
[297020](#) [297025](#) [297030](#) [029707.5WXNV](#) [0297003.WXNV](#) [0297015.WXNV](#) [0297020.WXNV](#) [0297002.LXN](#)
[LMIN025.V](#) [0MIN025.V](#) [0MIN020.V](#) [LMIN020.V](#) [0MIN005.V](#) [LMIN005.V](#) [0297002.L](#) [0297005.WXNV](#)
[0297010.WXNV](#) [0297002.WXNV](#) [0297900.WXNV](#) [0297030.WXNV](#) [0297025.WXNV](#) [0297004.WXNV](#) [029707.5U](#)
[0297025.U](#) [0297005.L](#) [0297002.H](#) [LMIN030.VP](#) [0297025.L](#) [0297003.U](#) [0MIN030.ZXPRO](#) [0297004.WXUL](#)
[0MIN025.ZXPRO](#) [0297020.H](#) [029707.5H](#) [0297010.U](#) [0297030.WXUL](#) [0297004.H](#) [0MIN010.VP](#) [LMIN010.VP](#)
[0MIN004.VP](#) [029707.5WXUL](#) [0MIN030.VP](#) [0MIN015.VP](#) [0297015.WXUL](#) [0297005.H](#) [0297030.U](#) [0MIN020.ZXPRO](#)
[0297020.WXUL](#) [029707.5L](#) [0MIN025.VP](#) [0297003.WXUL](#) [0297025.H](#) [0297030.L](#) [LMIN005.VP](#) [0MIN002.VP](#)
[0297025.WXUL](#) [0297010.H](#) [0297003.H](#) [0MIN005.VP](#) [0297005.U](#) [0MIN020.VP](#) [0297010.WXUL](#) [0297003.L](#)
[0MIN07.5VP](#) [0297030.H](#) [0MIN003.VP](#) [0297020.L](#) [0297002.WXUL](#) [0297010.L](#) [LMIN015.VP](#) [0297005.WXUL](#)
[0297004.L](#) [0297015.H](#) [LMIN020.VP](#) [LMIN025.VP](#) [0297004.U](#) [0297002.U](#) [0297020.U](#) [0297010.LXN](#) [0297015.L](#)