


Oct.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

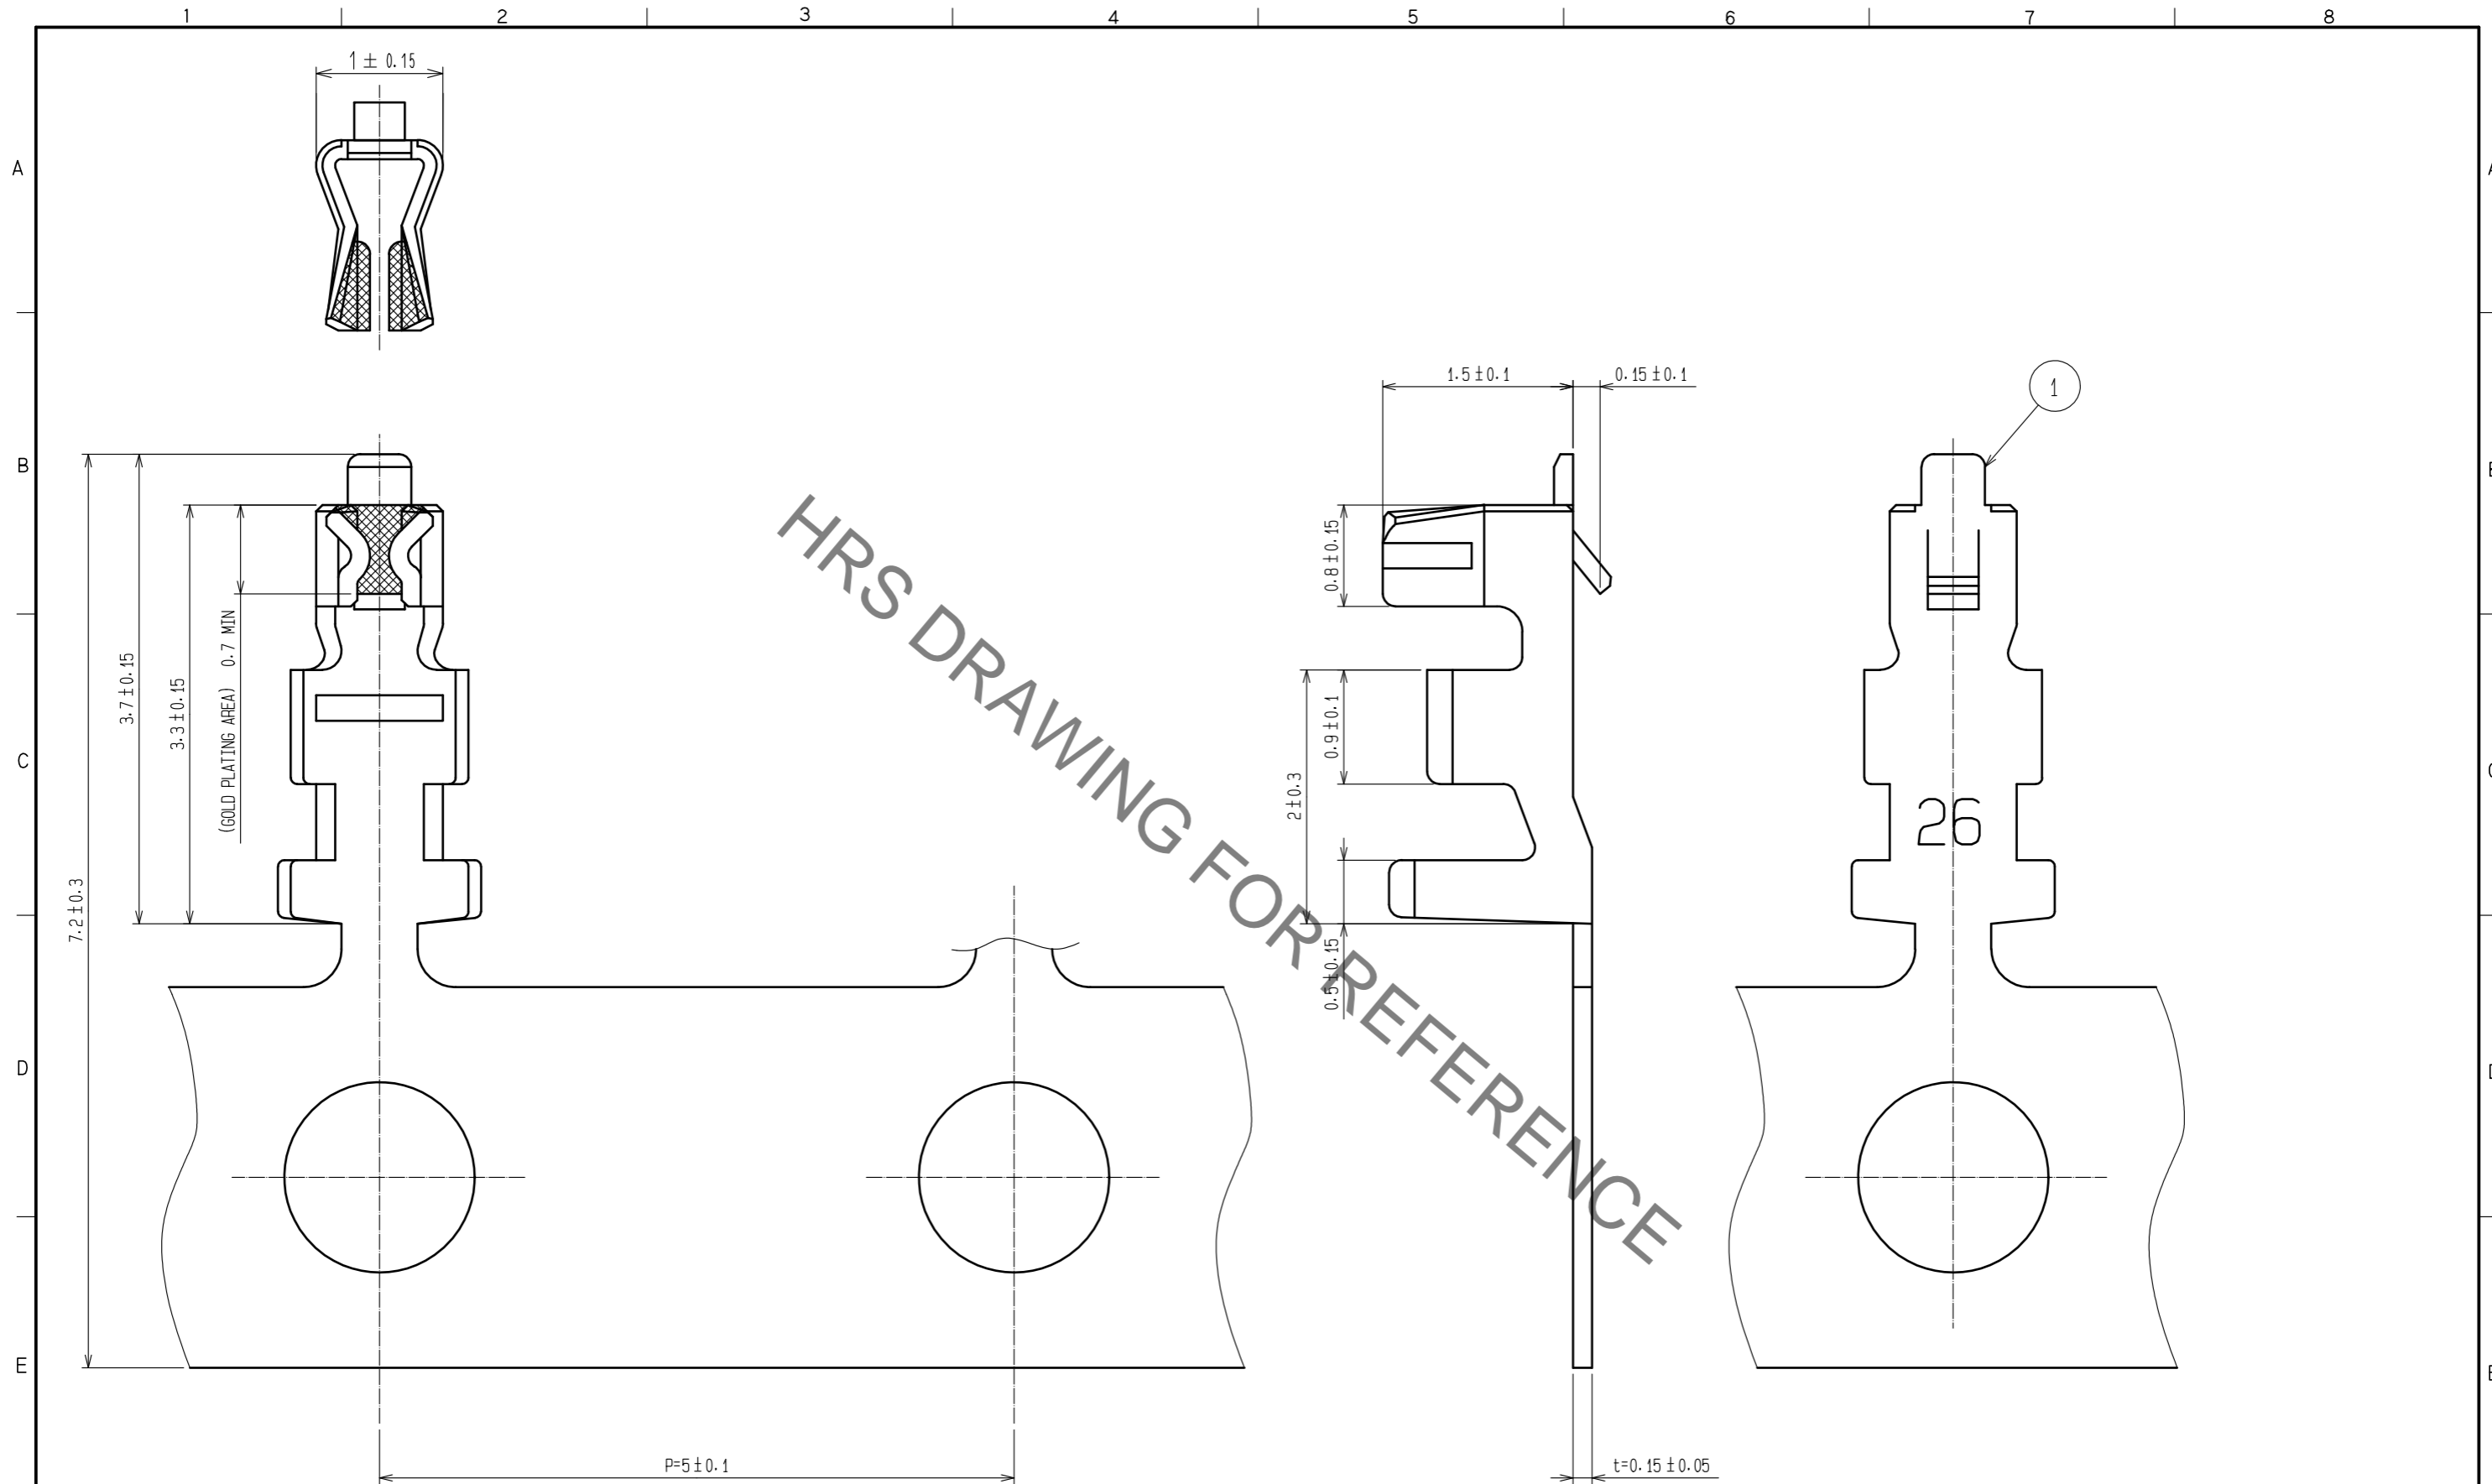

NOTES 1: APPLICABLE WIRE : 26 - 30 AWG  
 2: 1 REEL 10000 CONTACTS  
 △ OUTER DIAMETER :  $\phi 0.56 - \phi 1.0 \text{ mm}$

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	PHOSPHOR BRONZE				CONTACT AREA: GOLD PLATING $0.2 \mu\text{m min}$ OTHERS: NICKEL PLATING $0.5 \mu\text{m min}$

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	20: 1	1	DIS-H-00004809	HT. SATO	SZ. ONO	20190425

<b>HRS</b> HIROSE ELECTRIC CO., LTD.	APPROVED : KJ. KATAYOSE	20050105	DRAWING NO.	EDC-071220-00-00
	CHECKED : TY. OMA	20050105	PART NO.	DF13-2630SCFA
	DESIGNED : TS. KUMAZAWA	20050105	CODE NO.	CL536-0298-5-00
	DRAWN : TS. KUMAZAWA	20050105		