


Model 1326 Double Banana Plug One End Only

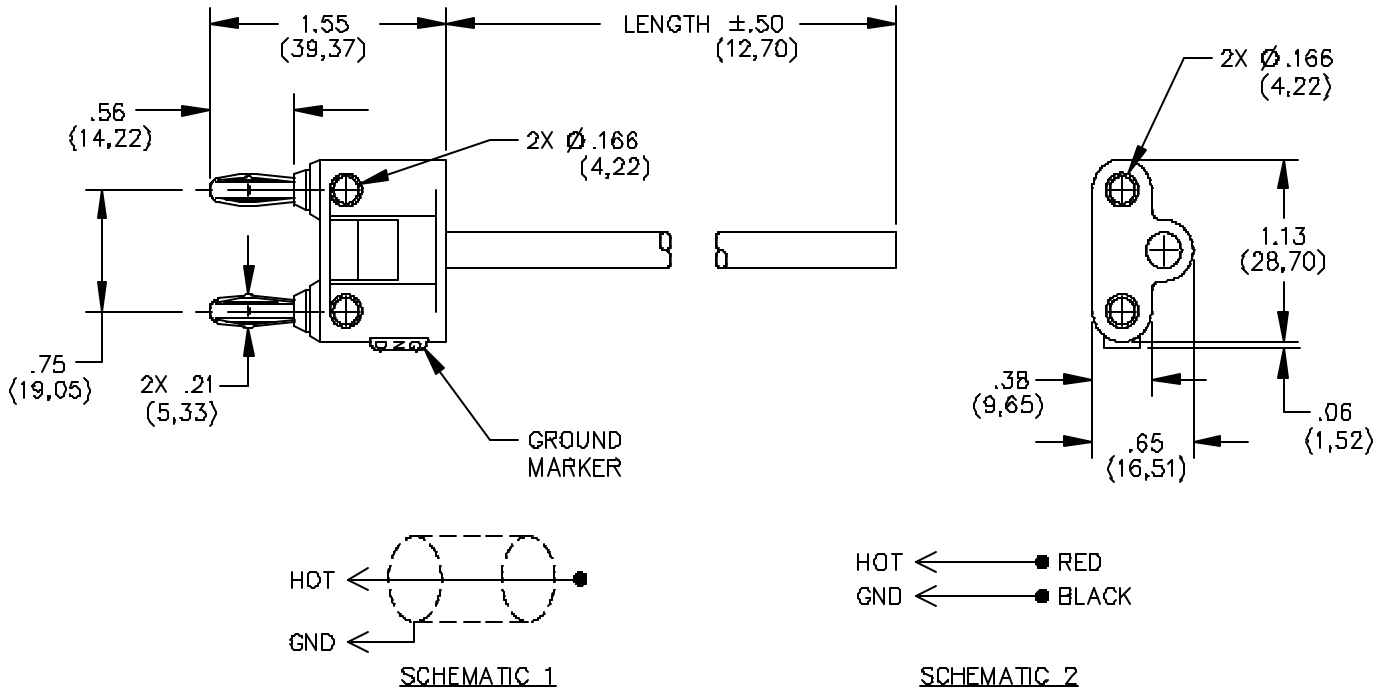

| Part Number | Schematic | Cable Type | Diameter | Impedance | Length |
|-------------|-----------|--------------|-----------------|-----------|----------------|
| 1326-A-60 | 2 | Twisted Pair | .250" (6,35 mm) | - | 60" (152,4 cm) |
| 1326-C-60 | 1 | RG58C/U | .195" (4,95 mm) | 50 Ohms | 60" (152,4 cm) |

FEATURES:

- This double banana plug cable is designed to be used with all standard .166" (4mm) diameter banana jacks.
- These jacks are usually spaced at .75" (19mm) apart. Pomona's double banana plugs can be used with most digital multimeters that have the common and volt-ohm jacks at the standard spacing.
- This cable is also suited for use with power supplies that have binding post outputs
- The Pomona Banana Plug is well known for durability and reliability.
- We take considerable pride in the materials and workmanship that go into this plug.

- The one-piece Beryllium Copper leaf spring with hard nickel plating is swaged into the solid brass banana plug body.

MATERIALS:

The plug is insert molded with black polypropylene (1326-C-).

The plug is insert molded with gray polypropylene (1326-A-).

RATINGS:

Operating Temperature: +55° C (+131° F) Max.

1326-A 300VAC/424VDC

1326-C 500VRMS

ORDERING INFORMATION: Model 1326

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[1326-A-60](#) [1326-C-60](#)