


Model 5302 SMD Grabber® Test Clip To Stacking Banana Plug

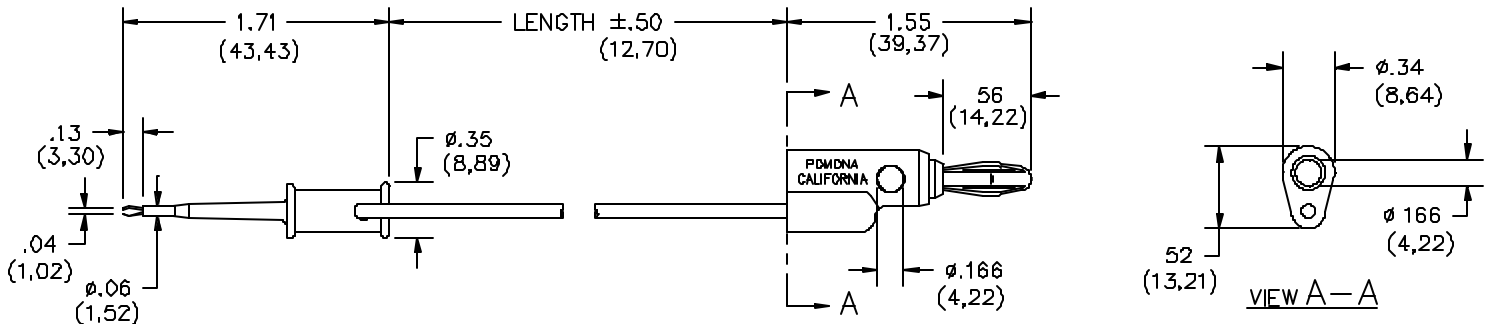

FEATURES:

- Ideal for temporary connector of Surface Mount Devices to test equipment.
- Banana Plug is vertical stackable and cross stackable.
- Banana Plug will mate to Model #3259, 1581 or any standard Banana Jack.

MATERIALS:

Conn: SMD Grabber®

Material: Contact-Stainless Steel, Type 301, ½ Hard.

Spring: Stainless Steel, Type 302.

Cap: Glass Filled Nylon. Color matches color of wire.

Barrel: Glass Filled Nylon. Color matches color of wire.

Marking: "POMONA, GRABBER®."

Finish: Contact-Gold plated per MIL-G-45204, Type II, 30 to 50 microinches.

Wire: 22 AWG stranding 26 to 36 t.c., PVC insulated, 1.63 (.064) O.D.

Color: See Ordering Information. Marking: "POMONA 5302-XX."

Conn: Banana Plug

Materials: Spring: Beryllium Copper per QQ-C-533, Berylco 25, Cond. H.T.

Plug Body: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire, Color matches color of wire.

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.

Operating Voltage: 150 VRMS/DC

Current: .5 Amperes

ORDERING INFORMATION: Model 5302-XX-*

XX-Cable Lengths, Standard Lengths: 12" (305), 24" (610), & 36" (914). Additional lengths and colors can be quoted upon request. *=Color, -0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White. Ordering Example: 5302-36-2 Indicates 36" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[5302-12-0](#) [5302-12-2](#) [5302-36-2](#) [5302-36-0](#) [5302-24-0](#) [5302-24-2](#)