

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00		M	REV PER ECO-12-000090	1FEB2012	CJV
						SLB

D


C

B

A

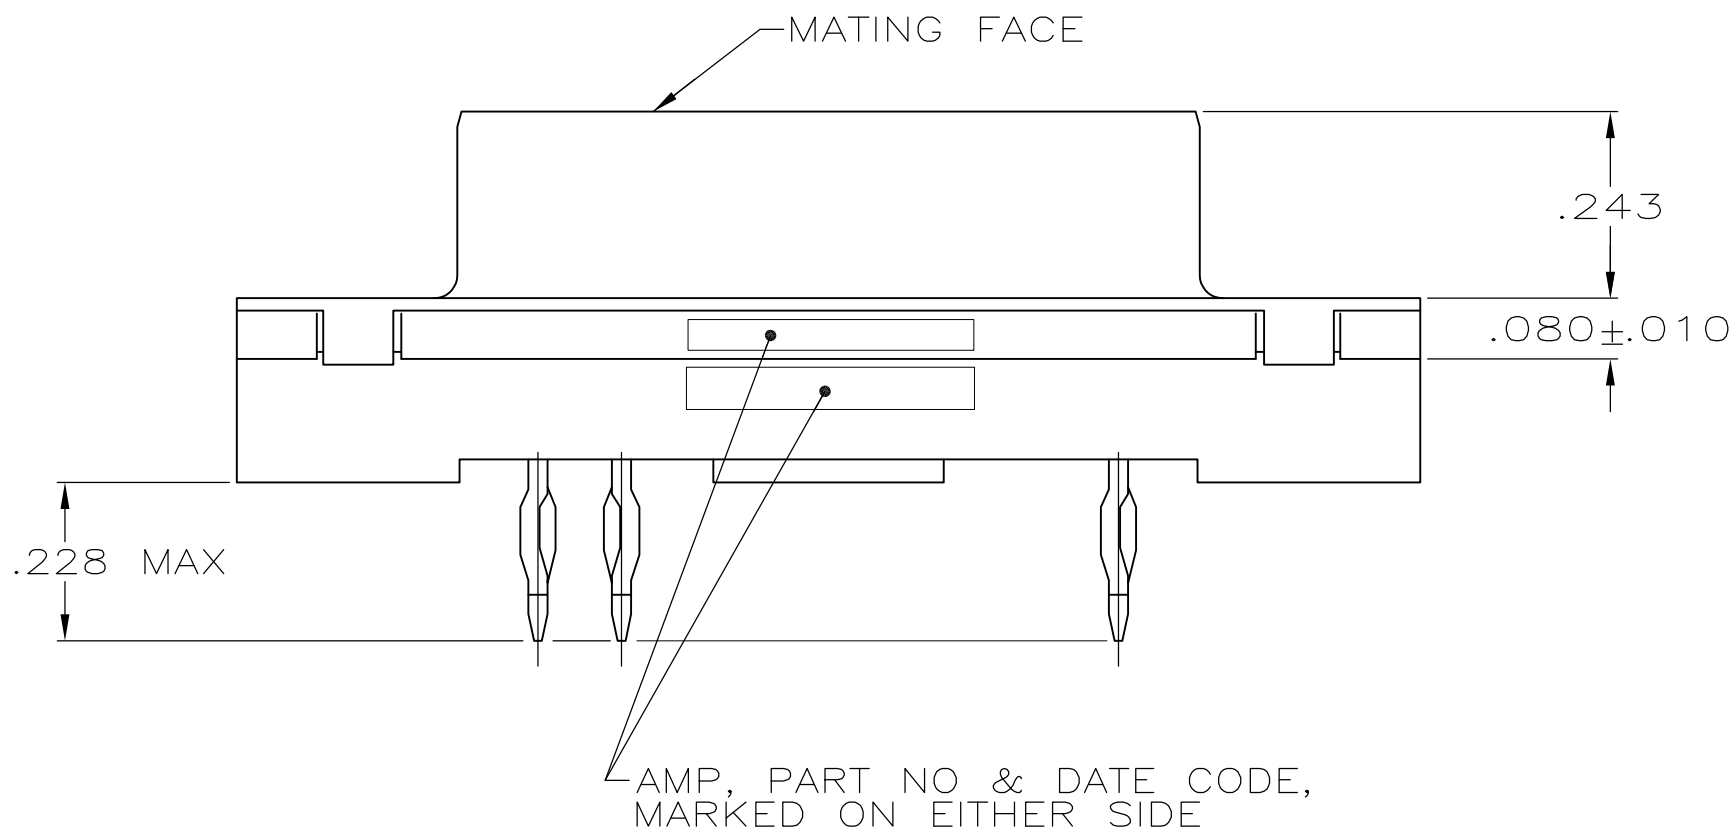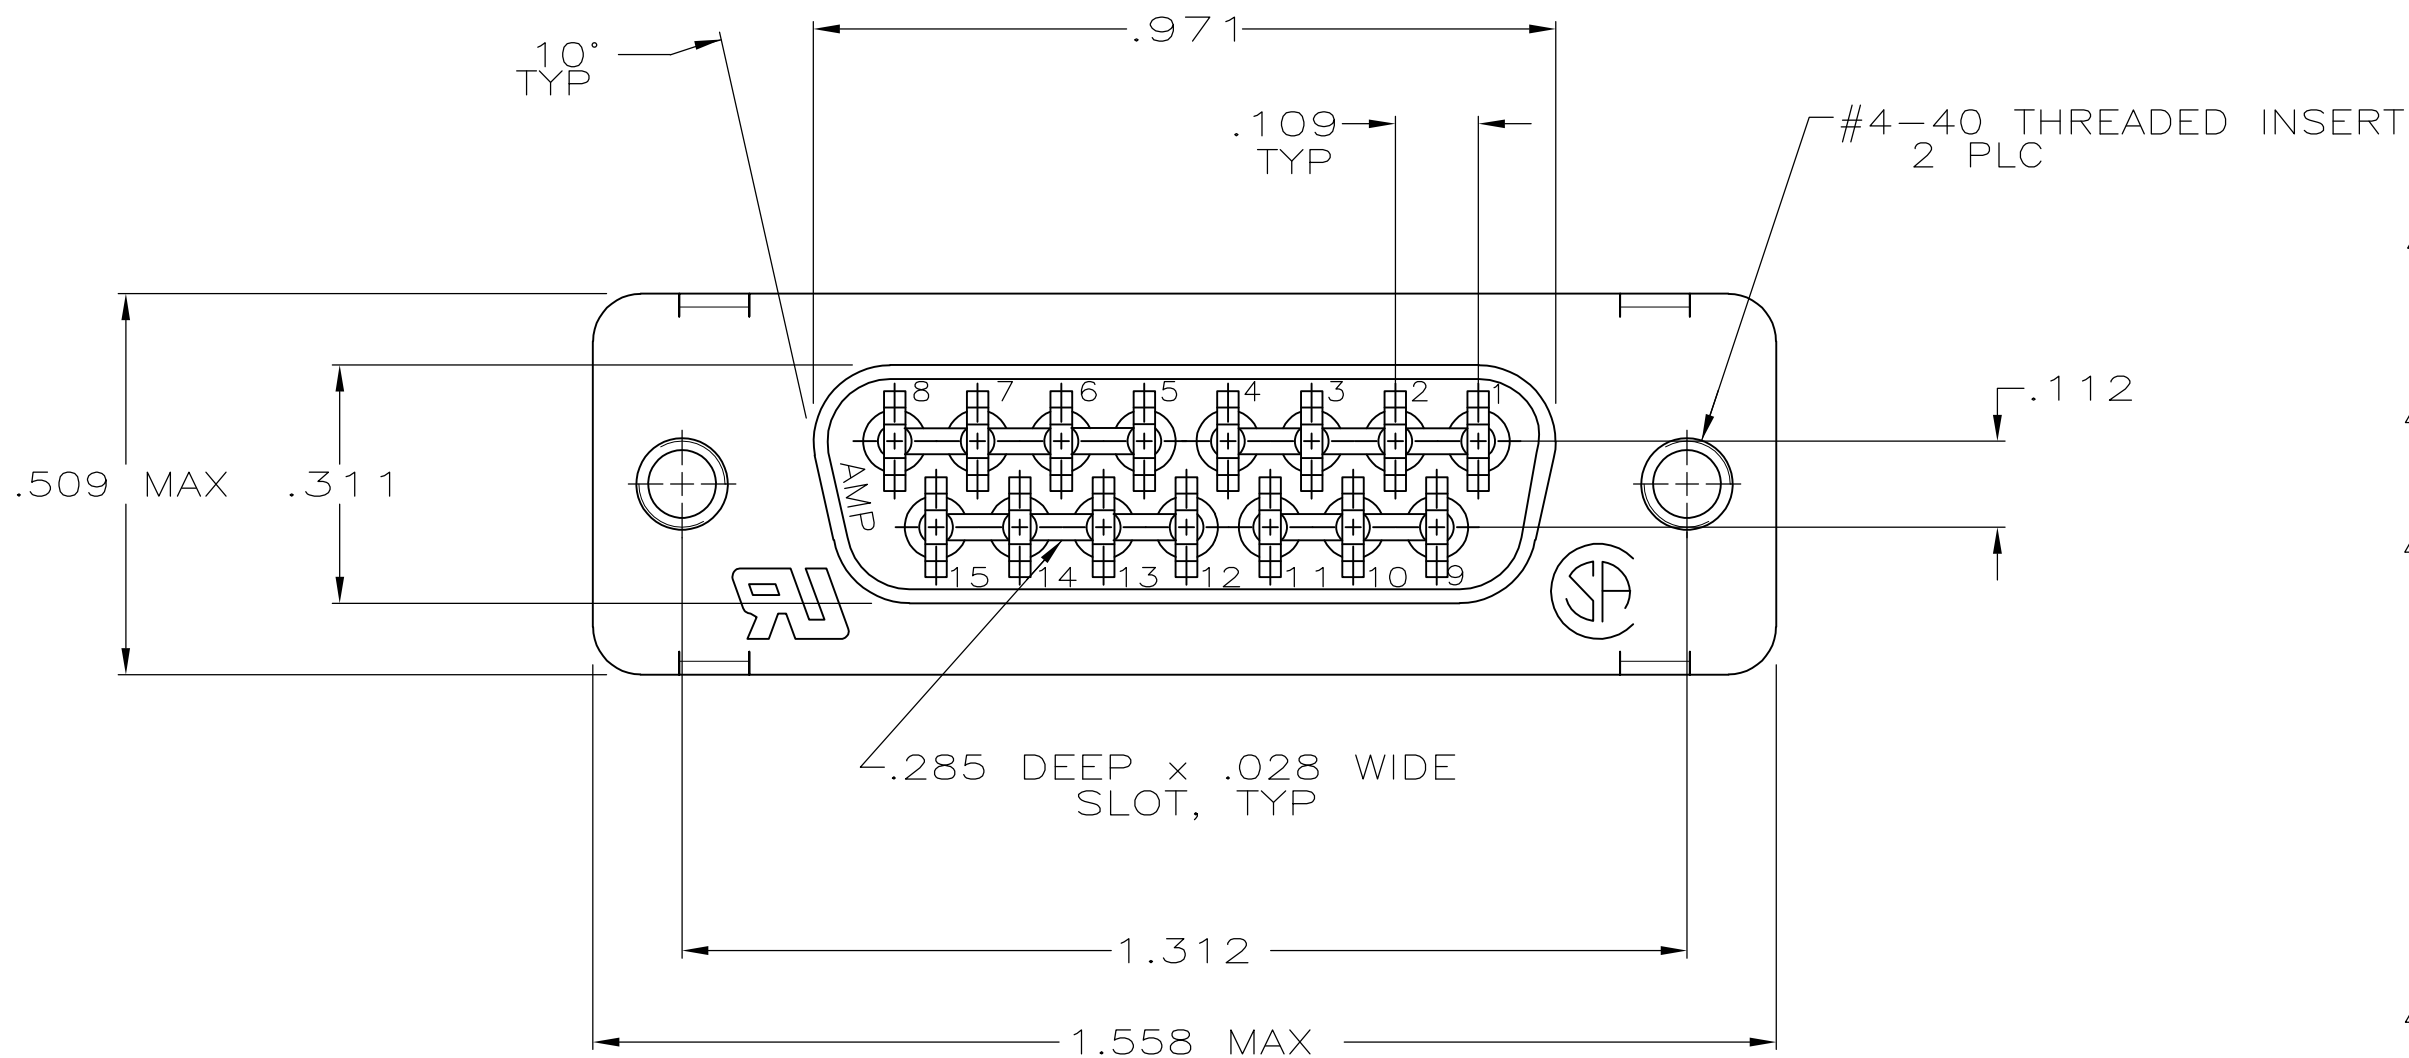

- 1 FOR USE WITH .093 MINIMUM THICK PRINTED CIRCUIT BOARD. REFER TO APPLICATION SPECIFICATION FOR PRINTED CIRCUIT BOARD LAYOUT DIMENSIONS AND FINISH RECOMMENDATIONS.
- 2 DUPLEX PLATED: GOLD FLASH ON MATING SURFACE, BRIGHT TIN OR BRIGHT TIN LEAD ON COMPLIANT PIN, ALL OVER NICKEL.
- 3 .000030 MINIMUM GOLD IN MATING AREA.
.000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN.
ALL OVER .000050 MINIMUM NICKEL.
OR
GOLD FLASH OVER PALLADIUM NICKEL
.000030 MINIMUM TOTAL IN MATING AREA.
.000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN.
ALL OVER .000050 MINIMUM NICKEL.
- 4 PLATED .0002-.0004 BRIGHT TIN

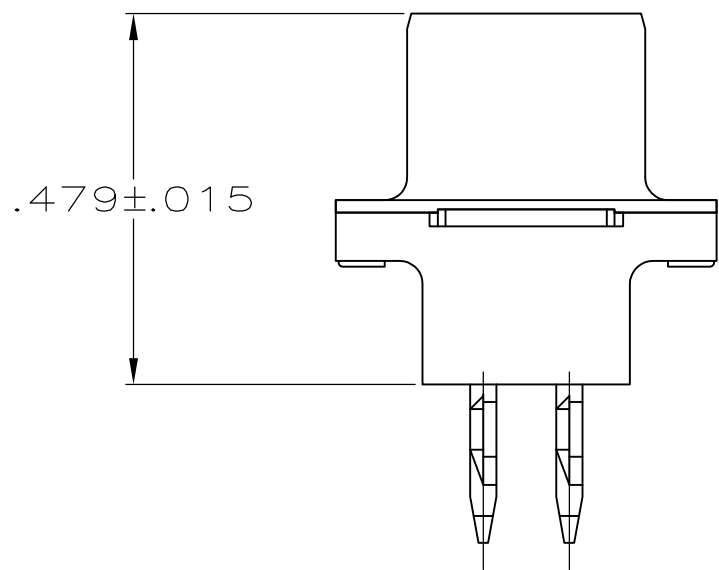

747141

B

A

SUPERSEDED BY 747141-2	3	747141-2
	2	747141-1
	CONTACT FINISH	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN D.HARDY 03-31-94	TE Connectivity	
DIMENSIONS: INCHES		CHK R.STONE 04-26-94	NAME RCPT ASSY, SIZE 2, 15 POSN, AMPLIMITE™ HDP, MDM PROFILE, W/ ACTION PIN CONT & METAL SHELL. #4-40 THREADED INSERTS	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 2°		APVD -	PRODUCT SPEC 108-40014	SIZE A2
MATERIAL HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLSTC; COLOR: BLACK CONTACTS: COPPER ALLOY SHELL: CARBON STEEL INSERT: BRASS		APPLICATION SPEC 114-40026 1	CAGE CODE 00779	DRAWING NO 747141
FINISH CONTACTS: SEE TABLE SHELL: 3 INSERTS: UNPLATED		WEIGHT -	RESTRICTED TO -	REV M
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[747141-2](#)