

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0011219963

Status:


Active

Overview:

Application Tooling

Description:

IDT - Manual Press

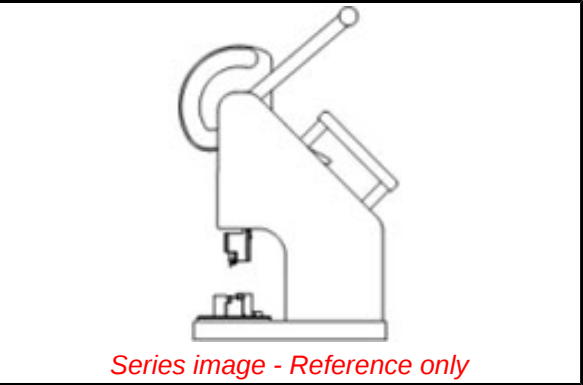

Series image - Reference only

Documents:

RoHS Certificate of Compliance (PDF)

| General                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Family                 | Application Tooling                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Series                         | 207122                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Comments                       | Complete Manual Standard Press for 2.50mm User Friendly, Complete Manual Standard Press for 2.50mm User Friendly                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Function                       | Insulation Displacement (IDT)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Geographic Area                | Global                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Level of Automation            | Manual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| More Detailed Tech Information | toolingsupport@molex.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Overview                       | Application Tooling                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Product Name                   | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Tool Type                      | IDT Hand Tool                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| UPC                            | 800753892736                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Warranty Disclaimer            | CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex specific connector systems listed in our ATS documents, the Molex tooling qualification does not apply and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified. |

| Material Info      |         |
|--------------------|---------|
| Engineering Number | AM63171 |

|                                                               |              |
|---------------------------------------------------------------|--------------|
| EU ELV                                                        |              |
| Not Reviewed                                                  |              |
| EU RoHS                                                       | China RoHS   |
| Not Reviewed                                                  |              |
| REACH SVHC                                                    |              |
| Not Reviewed                                                  |              |
| Halogen-Free                                                  |              |
| Status                                                        |              |
| Not Reviewed                                                  |              |
| For more information, please visit <a href="#">Contact US</a> |              |
| China ROHS                                                    | Not Reviewed |
| ELV                                                           | Not Reviewed |
| RoHS Phthalates                                               | Not Reviewed |

Search Parts in this Series

207122 Series

| Application Tooling Description                                                                                            | FAQ Product # |
|----------------------------------------------------------------------------------------------------------------------------|---------------|
| 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Female, with Tin (Sn) Plated Brass Contact, 18-24 AWG, Reel | 2061101       |
| 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Female, with Tin (Sn) Plated Brass Contact, 18-24 AWG, Bag  | 2061103       |
| 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 4529, Female, with Tin (Sn) Plated Phosphor Bronze   | 2061104       |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | Contact, 18-24 AWG,<br>Reel<br>1.57mm Diameter, <u>2061131</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Tin (Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Reel<br>1.57mm Diameter, <u>2061132</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Tin (Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Bag<br>1.57mm Diameter, <u>2061141</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Tin (Sn) Plated<br>Brass Contact,<br>24-30 AWG, Without<br>Locking Tabs, Reel<br>Packaged<br>1.57mm Diameter, <u>2061143</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Tin (Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Reel Packaged with<br>Interleaf Paper<br>1.57mm Diameter, <u>2062101</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1560, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 18-24 AWG,<br>Reel<br>1.57mm Diameter, <u>2062103</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1560, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 18-24 AWG,<br>Bag<br>1.57mm Diameter, <u>2062131</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1854, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Reel<br>1.57mm Diameter, <u>2062132</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series |  |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 1854, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Bag<br>1.57mm Diameter, <a href="#">2065101</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Female,<br>with 0.76µm Gold<br>(Au) Plated Brass<br>Contact, 18-24 AWG,<br>Reel<br>1.57mm Diameter, <a href="#">2065102</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Female,<br>with 0.76µm Gold<br>(Au) Plated Brass<br>Contact, 18-24 AWG,<br>Bag<br>1.57mm Diameter, <a href="#">2065104</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1561, Female,<br>with 1.27µm Gold<br>Max. Insulation<br>Diameter, Loose in<br>Bag Packaged<br>1.57mm Diameter, <a href="#">2065109</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Female,<br>with Selective Gold<br>(Au) Plated Brass<br>Contact, 18-24 AWG,<br>Bag<br>1.57mm Diameter, <a href="#">2065138</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female,<br>with 0.76µm Gold<br>(Au) Plated Brass<br>Contact, 24-30 AWG,<br>Reel<br>1.57mm Diameter, <a href="#">2065147</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 24-30 AWG,<br>Reel<br>1.57mm Diameter, <a href="#">2065148</a><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1855, Female, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 24-30 AWG,<br>Bag |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|  |                                                                                                                                                                              |                         |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with Gold (Au) Plated Brass Contact, 18-24 AWG, Reel                                       | <a href="#">2066100</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with Gold (Au) Plated Brass Contact, 18-24 AWG, Bag                                        | <a href="#">2066103</a> |
|  | 062 Male Term Chain Brs 50Au 18-24                                                                                                                                           | <a href="#">2066105</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with Selective Gold (Au) Plated Brass Contact, Tin/Lead Plated Crimp Area, 18-24 AWG, Reel | <a href="#">2066118</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with Selective Gold (Au) Plated Brass Contact, Tin/Lead Plated Crimp Area, 18-24 AWG, Bag  | <a href="#">2066119</a> |
|  | .062 Male Term PC Tail 30 au                                                                                                                                                 | <a href="#">2066125</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1854, Male, with Gold (Au) Plated Brass Contact, 24-30 AWG, Reel                                       | <a href="#">2066130</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1854, Male, with Selective Gold (Au) Plated Brass Contact, 24-30 AWG, Reel                             | <a href="#">2066138</a> |
|  | 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1854, Male, with Selective Gold (Au) Plated Brass                                                      | <a href="#">2066143</a> |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Contact, Tin (Sn)<br>Plated Crimp Area,<br>24-30 AWG, Reel<br>1.57mm Diameter, <u>2066144</u><br>Standard .062" Pin<br>and Socket Crimp<br>Terminal, Series<br>1854, Male, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, Tin (Sn)<br>Plated Crimp Area,<br>24-30 AWG, Bag<br>062 Male Term Tin <u>2068104</u><br>PCTail Chn<br>Vertical Solder <u>2072101</u><br>Relief (VSR) Direct-<br>Solder Crimp<br>Terminal, Series<br>4706, Male, Tin<br>Terminal Progression<br>MLX Female Crimp <u>2081001</u><br>Terminal 42024,<br>14-20 AWG, Reel,<br>Brass, Tin (Sn)<br>Plating<br>MLX Crimp Terminal <u>2081002</u><br>42024, 14-20 AWG,<br>Bag Tin (Sn)<br>MLX Female Crimp <u>2081003</u><br>Terminal 42024,<br>14-20 AWG, Reel,<br>Phosphor Bronze,<br>Tin (Sn) Plating<br>MLX Crimp Terminal <u>2081004</u><br>42024, 14-20 AWG,<br>Bag Tin (Sn)<br>Claspcon Crimp <u>2081101</u><br>Terminal Socket, Tin<br>(Sn) Plated Brass<br>Contact, 16-24 AWG,<br>Reel<br>Claspcon Crimp <u>2081102</u><br>Terminal Socket, Tin<br>(Sn) Plated Brass<br>Contact, 16-24 AWG,<br>Bag<br>Claspcon Crimp <u>2081103</u><br>Terminal Socket, Tin<br>(Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Reel<br>Claspcon Crimp <u>2081104</u><br>Terminal Socket, Tin<br>(Sn) Plated Brass<br>Contact, 24-30 AWG,<br>Bag<br>Disk Drive Power <u>2081201</u><br>Connection System,<br>Female Crimp<br>Terminal, Reel,<br>Phosphor Bronze,<br>AWG 14-20<br>2.096MM DIA <u>2081266</u><br>TERMINAL |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|  |                                                                                                                                         |                |
|--|-----------------------------------------------------------------------------------------------------------------------------------------|----------------|
|  | MLX Male Crimp Terminal 42023, 14-20 AWG, Reel, Brass, Tin (Sn) Plating                                                                 | <u>2082003</u> |
|  | MLX Crimp Terminal 42023, 14-20 AWG, Bag Tin (Sn)                                                                                       | <u>2082004</u> |
|  | MLX Male Crimp Terminal 42023, 14-20 AWG, Reel, Phosphor Bronze, Tin (Sn) Plating                                                       | <u>2082005</u> |
|  | MLX Crimp Terminal 42023, 14-20 AWG, Bag Tin (Sn)                                                                                       | <u>2082006</u> |
|  | MLX Crimp Terminal 42023, 14-20 AWG, Bag Selective Gold (Au)                                                                            | <u>2082008</u> |
|  | Claspcon Crimp Terminal Socket, Tin (Sn) Plated Brass Contact, 16-24 AWG, Reel                                                          | <u>2085101</u> |
|  | 2.36mm Diameter, Standard .093" Pin and Socket Crimp Terminal, Series 1189, Female, with Tin (Sn) Plated Brass Contact, 14-20 AWG, Reel | <u>2091102</u> |
|  | 2.36mm Diameter, Standard .093" Pin and Socket Crimp Terminal, Series 1189, Female, with Tin (Sn) Plated Brass Contact, 14-20 AWG, Bag  | <u>2091104</u> |
|  | 093FemaleTerm Chain/IntLeaf Brs Tin18-22                                                                                                | <u>2091115</u> |
|  | 2.36mm Diameter, Standard .093" Pin and Socket Crimp Terminal, Series 1381, Female, with Tin (Sn) Plated Brass Contact, 18-22 AWG, Reel | <u>2091117</u> |
|  | 2.36mm Diameter Standard .093" Crimp Terminal, Dimpled Female, 18-22 AWG, Bag                                                           | <u>2091118</u> |
|  | 2.36mm Diameter, Standard .093" Pin and Socket Crimp Terminal, Series 2273, Female, with Tin (Sn) Plated Contact, Low                   | <u>2091122</u> |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Engagement Force,<br>18-22 AWG, Reel<br>2.36mm Diameter, <a href="#">2091134</a><br>Standard .093" Pin<br>and Socket PC Tail<br>Terminal, Series<br>1377, Female, with<br>Tin (Sn) Plated<br>Contact, Bag<br>2.36mm Diameter, <a href="#">2091205</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>4550, Female, with<br>Tin (Sn) Plated<br>Phosphor Bronze<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2091615</a><br>Standard .093"<br>Pin and Socket<br>Crimp Terminal,<br>Series 42477,<br>Female, with Tin<br>(Sn) Plated Contact,<br>High Current/Low<br>Engagement Force,<br>14-18 AWG, Reel<br>2.36mm Diameter, <a href="#">2092101</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2092103</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 14-20 AWG,<br>Bag<br>Vertical Solder Relief <a href="#">2092105</a><br>(VSR) Direct-Solder<br>Crimp Terminal,<br>Series 4706, Male,<br>Tin (Sn) Plated Brass<br>Contact, 16-18 AWG,<br>11.20mm Terminal<br>Progression<br>2.36mm Diameter, <a href="#">2092116</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 18-22 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2092117</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with Tin |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | (Sn) Plated Brass<br>Contact, without<br>Dents, 18-22 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2092118</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 18-22 AWG,<br>Bag<br>093 MaleTermChain/ <a href="#">2092127</a><br>IntLeaf Brs Tin18-22<br>2.36mm Diameter, <a href="#">2092133</a><br>Standard .093" Pin<br>and Socket PC Tail<br>Terminal, Series<br>1376, Male, with Tin/<br>Lead (Sn/Pb) Plated<br>Contact, With Detent,<br>Bag Packaged<br>2.36mm Diameter, <a href="#">2092166</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>4549, Male, with<br>Tin (Sn) Plated<br>Phosphor Bronze<br>Contact, 14-20 AWG,<br>Reel Packaged<br>2.36mm Diameter, <a href="#">2092170</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 14-18 AWG,<br>Large Insulation<br>Crimp, Reel<br>2.36mm Diameter, <a href="#">2092171</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with Tin<br>(Sn) Plated Brass<br>Contact, 14-18 AWG,<br>Large Insulation<br>Crimp, Bag<br>2.36mm Diameter, <a href="#">2092611</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>42478, Male, with Tin<br>(Sn) Plated Contact,<br>High Current/Low<br>Engagement Force,<br>14-18 AWG, Reel<br>2.36mm Diameter, <a href="#">2095101</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with Tin<br>(Sn) Plated Brass |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | Contact, 14-20 AWG,<br>Chain<br>2.36mm Diameter, <a href="#">2095102</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1189, Female, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2095111</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1189, Female, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 14-20 AWG,<br>Bag<br>2.36mm Diameter, <a href="#">2095130</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1381, Female, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 18-22 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2095132</a><br>Standard .093" Pin<br>and Socket PC Tail<br>Terminal, Series<br>1377, Female, with<br>Gold (Au) Plated<br>Contact, Bag<br>2.36mm Diameter, <a href="#">2095142</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1381, Female, with<br>Gold (Au) Plated<br>Brass Contact, 18-22<br>AWG, Bag<br>2.36mm Diameter, <a href="#">2095143</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1381, Female, with<br>Gold (Au) Plated<br>Brass Contact, 18-22<br>AWG, Reel<br>2.36mm Diameter, <a href="#">2095169</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>4550, Female, with<br>Gold (Au) Plated<br>Phosphor Bronze<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <a href="#">2095170</a><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series |  |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4550, Female, with<br>Gold (Au) Plated<br>Phosphor Bronze<br>Contact, 14-20 AWG,<br>Bag<br>2.36mm Diameter, <u>2096100</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with<br>Gold (Au) Plated<br>Brass Contact, 14-20<br>AWG, Reel<br>2.36mm Diameter, <u>2096101</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1190, Male, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <u>2096102</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1189, Female, with<br>Tin (Sn) Plated Brass<br>Contact, 14-20 AWG,<br>Reel<br>2.36mm Diameter, <u>2096122</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with<br>Gold (Au) Plated<br>Brass Contact, 18-22<br>AWG, Reel<br>2.36mm Diameter, <u>2096123</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with<br>Gold (Au) Plated<br>Brass Contact, 18-22<br>AWG, Bag<br>2.36mm Diameter, <u>2096126</u><br>Standard .093" Pin<br>and Socket Crimp<br>Terminal, Series<br>1380, Male, with<br>Selective Gold<br>(Au) Plated Brass<br>Contact, 18-22 AWG,<br>Bag<br>2.36mm Diameter, <u>2096132</u><br>Standard .093"<br>Pin and Socket<br>PC Tail Terminal,<br>Series 1376, Male,<br>with Gold (Au)<br>Plated Contact,<br>Without Detent, Bag<br>Packaged |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|  |                                                                                                                                                                                              |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 2.36mm Diameter, <a href="#">2098103</a><br>Standard .093" Pin<br>and Socket Crimp<br>Grounding Terminal,<br>Series 1973, Male,<br>with Tin (Sn) Plated<br>Brass Contact, 18-22<br>AWG, Reel |
|  | 2.36mm Diameter, <a href="#">2098108</a><br>Standard .093" Pin<br>and Socket Crimp<br>Grounding Terminal,<br>Series 1973, Male,<br>with Tin (Sn) Plated<br>Brass Contact, 14-18<br>AWG, Reel |
|  | 1.57mm Diameter <a href="#">3061031</a><br>Standard .062"<br>Pin and Socket<br>Receptacle Housing,<br>3 Circuits, with<br>Standard Mounting<br>Ears                                          |
|  | 1.57mm Diameter <a href="#">3061041</a><br>Standard .062"<br>Pin and Socket<br>Receptacle Housing,<br>4 Circuits, with<br>Standard Mounting<br>Ears                                          |
|  | 1.57mm Diameter <a href="#">3062041</a><br>Standard .062" Pin<br>and Socket Plug<br>Housing, 4 Circuits,<br>with Standard<br>Mounting Ears                                                   |
|  | 1.57mm Diameter <a href="#">3062122</a><br>Standard .062" Pin<br>and Socket Plug<br>Housing, 12 Circuits,<br>without Mounting<br>Ears, Natural                                               |
|  | 1.57mm Diameter <a href="#">3067061</a><br>Standard .062" Pin<br>and Socket Plug<br>Housing, 6 Circuits,<br>without Mounting<br>Ears, Black                                                  |
|  | 2.36mm Diameter <a href="#">3091153</a><br>Standard .093"<br>Pin and Socket<br>Receptacle Housing,<br>15 Circuits, 3 Rows,<br>with Pre-bent<br>Mounting Ears, with<br>Lock Ramps             |
|  | 2.36mm Diameter <a href="#">3091161</a><br>Standard .093"<br>Pin and Socket<br>Receptacle Housing<br>without Mounting<br>Ears, Positive Lock,<br>2 Circuits                                  |
|  | 2.36mm Diameter <a href="#">3092161</a><br>Standard .093" Pin                                                                                                                                |

|                                                                                                                                                                                                           |                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| and Socket Plug<br>Housing without<br>Mounting Ears,<br>Positive Lock, 2<br>Circuits<br>2.36mm Diameter<br>Standard .093" Pin<br>and Socket Plug<br>Housing, 2 Circuits,<br>without Mounting<br>Ears, Red | <u>3097024</u> |
| Flat Blade Crimp<br>Terminal, Series<br>1508, Female, With<br>Tin (Sn) Plated<br>Brass Contact, 14-18<br>AWG (or 18 AWG<br>Double Crimp), Reel<br>Packaged                                                | <u>5060117</u> |
| KK Crimp Terminal,<br>Series 1799, Female,<br>with Tin (Sn) Plated<br>Brass Contact, 18-24<br>AWG, Chain on Reel                                                                                          | <u>8300109</u> |
| KK 396 Crimp<br>Terminal 8818, 18-22<br>AWG, Reel, Brass<br>Tin (Sn)                                                                                                                                      | <u>8500008</u> |
| KK 156 TERMINAL<br>CRIMP 18-24 AWG<br>TIN                                                                                                                                                                 | <u>8500015</u> |
| KK 156 TERM<br>CRP 18-20 AWG<br>TRIFURCON TIN                                                                                                                                                             | <u>8500024</u> |
| KK 254 Cat Ear<br>Crimp Terminal<br>4809, 22-30 AWG,<br>Hot Tin Dip, Reel                                                                                                                                 | <u>8500031</u> |
| KK 254 Cat Ear<br>Crimp Terminal<br>4809, 22-30 AWG,<br>Hot Tin Dip, Bag                                                                                                                                  | <u>8500032</u> |
| KK 396 Crimp<br>Terminal 2478, 18-24<br>AWG, Reel, Brass<br>Tin (Sn)                                                                                                                                      | <u>8500105</u> |
| KK 396 Crimp<br>Terminal 2478, 18-24<br>AWG, Bag, Brass Tin<br>(Sn)                                                                                                                                       | <u>8500106</u> |
| KK 396 Crimp<br>Terminal 2578, 22-26<br>AWG, Reel, Brass,<br>2.540µm Tin (Sn)                                                                                                                             | <u>8500107</u> |
| KK 396 Crimp<br>Terminal 2578, 22-26<br>AWG, Bag, Brass,<br>2.540µm Tin (Sn)                                                                                                                              | <u>8500108</u> |
| KK Crimp Terminal,<br>Series 2477,<br>Humpback, with Tin<br>(Sn) Plated Brass<br>Contact, 18-24 AWG,<br>Reel                                                                                              | <u>8500109</u> |

|                                                                                                |                |
|------------------------------------------------------------------------------------------------|----------------|
| KK Crimp Terminal, Series 2477, Humpback, with Tin (Sn) Plated Brass Contact, 18-24 AWG, Loose | <u>8500110</u> |
| KK 396 Crimp Terminal 2578, 22-26 AWG, Reel, Brass, 7.6µm Tin (Sn)                             | <u>8500111</u> |
| KK 156 TERMINAL CRIMP 22-26 AWG TIN                                                            | <u>8500112</u> |
| KK 254 Crimp Terminal, 22-30 AWG, Hot Tin (Sn) Dip Plating                                     | <u>8500113</u> |
| KK 254 Crimp Terminal, 22-30 AWG, Bag, Hot Tin (Sn) Dip Plating                                | <u>8500114</u> |
| 3.96mm Pitch KK Crimp Terminal 2878, 18-20 AWG, Reel, Brass, Tin (Sn), Bifurcated              | <u>8500115</u> |
| 3.96mm Pitch KK Crimp Terminal 2878, 18-20 AWG, Bag, Brass, Tin (Sn), Bifurcated               | <u>8500116</u> |
| KK 396 Crimp Terminal 2478, 18-24 AWG, Reel, Brass, 3.8µm Tin (Sn)                             | <u>8500119</u> |
| KK 396 Crimp Terminal 2578, 22-26 AWG, Reel, Phosphor Bronze, 2.540µm Tin (Sn)                 | <u>8500133</u> |
| KK 254 Crimp Terminal 4809, 22-30 AWG, Hot Tin Dip, Reel                                       | <u>8500135</u> |
| KK 254 Crimp Terminal, 22-30 AWG, Reel, Tin (Sn) Plating, Nickel (Ni) Under Plating            | <u>8500159</u> |
| KK 254 Crimp Terminal, 22-30 AWG, Bag, Tin (Sn) Plating, Nickel (Ni) Under Plating             | <u>8500160</u> |
| KK Trifurcon Crimp Terminal 7258, 22-26 AWG, Reel, Brass Tin (Sn)                              | <u>8500183</u> |
| KK Trifurcon Crimp Terminal 6838, 18-20 AWG, Reel, Brass Tin (Sn)                              | <u>8500187</u> |
| KK Trifurcon Crimp Terminal 6838, 18-20                                                        | <u>8500189</u> |

|                                                                |                |
|----------------------------------------------------------------|----------------|
| AWG, Bag, Brass Tin (Sn)                                       |                |
| KK 156 TERM                                                    | <u>8500251</u> |
| CRP 18-20 AWG TRIFURCON TIN                                    |                |
| KK 156 TERM                                                    | <u>8500283</u> |
| CRP 22-26 AWG TRIFURCON TIN                                    |                |
| KK 100 Crp Term                                                | <u>8510101</u> |
| Std 22-30 Awg Unplt                                            |                |
| KK 254 Crimp                                                   | <u>8510108</u> |
| Terminal, 22-30 AWG, Reel, Tin (Sn), Nickel (Ni) Under Plating |                |
| KK 396 Crimp                                                   | <u>8520071</u> |
| Terminal 2478, 18-24 AWG, Reel, Phosphor Bronze, Tin (Sn)      |                |
| KK 396 Crimp                                                   | <u>8520072</u> |
| Terminal 2478, 18-24 AWG, Bag, Phosphor Bronze, Tin (Sn)       |                |
| KK Trifurcon Crimp                                             | <u>8520113</u> |
| Terminal 6838, 18-20 AWG, Bag, Phosphor Bronze Tin (Sn)        |                |
| KK .100 CRIMP                                                  | <u>8520118</u> |
| TERMINAL 100MI MATTE TIN                                       |                |
| KK 254 Crimp                                                   | <u>8520123</u> |
| Terminal 6459, 22-30 AWG, Bag, Phosphor Bronze Tin (Sn)        |                |
| KK Trifurcon Crimp                                             | <u>8520124</u> |
| Terminal 7258, 22-26 AWG, Reel, Phosphor Bronze Tin(Sn)        |                |
| KK Trifurcon Crimp                                             | <u>8520125</u> |
| Terminal 7258, 22-26 AWG, Bag, Phosphor Bronze Tin (Sn)        |                |
| 3.96mm Pitch KK Crimp Terminal                                 | <u>8520126</u> |
| 2878, 18-20 AWG, Reel, Phosphor Bronze, Tin (Sn), Bifurcated   |                |
| 3.96mm Pitch KK Crimp Terminal                                 | <u>8520127</u> |
| 2878, 18-20 AWG, Bag, Phosphor Bronze, Tin (Sn), Bifurcated    |                |
| KK 396 Crimp                                                   | <u>8520132</u> |
| Terminal 8818, 18-22 AWG, Bag, Phosphor Bronze Tin (Sn)        |                |

|                                                                                                         |                |
|---------------------------------------------------------------------------------------------------------|----------------|
| KK 396 Crimp<br>Terminal 2478,<br>18-24 AWG, Bag,<br>Phosphor Bronze,<br>5.0µm Tin (Sn)                 | <u>8520812</u> |
| KK 156 TERM<br>CRP 18-20 AWG<br>TRIFURCON                                                               | <u>8531101</u> |
| KK 254 Crimp<br>Terminal, 22-30<br>AWG, Reel,<br>Selective Gold (Au),<br>Nickel (Ni) Under<br>Plating   | <u>8550101</u> |
| KK 254 Crimp<br>Terminal, 22-30<br>AWG, Bag, Selective<br>Gold (Au), Nickel (Ni)<br>Under Plating       | <u>8550102</u> |
| KK 396 Crimp<br>Terminal 2478, 18-24<br>AWG, Reel, Brass,<br>0.38µm Selective<br>Gold (Au)              | <u>8550103</u> |
| KK 254 Crimp<br>Terminal 4809, 22-30<br>AWG, Selective Gold<br>(Au), Reel                               | <u>8550110</u> |
| KK 254 Crimp<br>Terminal 4809, 22-30<br>AWG, Selective Gold<br>(Au), Bag                                | <u>8550111</u> |
| KK 254 Cat Ear<br>Crimp Terminal<br>4809, 22-30 AWG,<br>Selective Gold, Reel                            | <u>8550112</u> |
| KK 396 Crimp<br>Terminal 2578, 22-26<br>AWG, Reel, Brass,<br>0.76µm Select Gold<br>(Au) over Gold Flash | <u>8550123</u> |
| KK High Pressure<br>Crimp Terminal<br>7879, 22-30 AWG,<br>Reel Selective Gold<br>(Au)                   | <u>8550124</u> |
| KK High Pressure<br>Crimp Terminal<br>7879, 22-30 AWG,<br>Bag Selective Gold<br>(Au)                    | <u>8550129</u> |
| KK 254 Crimp<br>Terminal, 22-30<br>AWG, Reel,<br>Selective Gold (Au),<br>Nickel (Ni) Under<br>Plating   | <u>8550130</u> |
| KK 254 Crimp<br>Terminal, 22-30<br>AWG, Bag, Selective<br>Gold (Au), Nickel (Ni)<br>Under Plating       | <u>8550131</u> |
| KK 396 Crimp<br>Terminal 2478, 18-24                                                                    | <u>8550134</u> |

AWG, Bag, Brass,  
0.76µm Gold (Au)  
KK 396 Crimp 8550137  
Terminal 2578, 22-26  
AWG, Left Payoff  
Reel, Brass, 0.76µm  
Select Gold (Au)  
over Gold Flash  
KK 156 TERMINAL 8550138  
CRIMP 1820 AWG  
GOLD  
KK 396 Crimp 8560105  
Terminal 2478, 18-24  
AWG, Reel, Brass,  
0.51µm Selective  
Gold (Au)  
KK 396 Crimp 8560106  
Terminal 2478, 18-24  
AWG, Bag, Brass,  
0.51µm Selective  
Gold (Au)  
KK 396 Crimp 8560108  
Terminal 2578, 22-26  
AWG, Bag, Brass,  
0.51µm Select Gold  
(Au) over Gold Flash  
KK 254 Crimp 8560109  
Terminal, 22-30  
AWG, Reel, Gold  
(Au), Nickel (Ni)  
Under Plating  
KK Crimp Terminal, 8560113  
Series 2477,  
Humpback, with  
Overall Gold (Au)  
Plated Brass  
Contact, 18-24 AWG,  
Reel  
KK Crimp Terminal, 8560114  
Series 2477,  
Humpback, with  
Overall Gold (Au)  
Plated Brass  
Contact, 18-24 AWG,  
Loose  
KK 254 Crimp 8560115  
Terminal 4809, 22-30  
AWG, Selective Gold  
(Au), Bag  
KK Trifurcon Crimp 8560123  
Terminal 7258,  
22-26 AWG, Reel,  
Phosphor Bronze  
Gold (Au)  
KK Trifurcon Crimp 8560124  
Terminal 7258,  
22-26 AWG, Bag,  
Phosphor Bronze  
Gold(Au)  
KK 156 TERMINAL 8580104  
CRIMP 18-24 AWG  
GOLD  
KK 156 TERM 8580105  
CRP 18-20 AWG  
TRIFURCON GOLD

|  |                                                                                                              |                |
|--|--------------------------------------------------------------------------------------------------------------|----------------|
|  | KK Trifurcon Crimp Terminal 6438, 18-20 AWG, Reel, Phosphor Bronze Selective Gold (Au)                       | <u>8580110</u> |
|  | KK Trifurcon Crimp Terminal 6438, 18-20 AWG, Bag, Phosphor Bronze Selective Gold (Au)                        | <u>8580111</u> |
|  | KK 396 Crimp Terminal 2478, 18-24 AWG, Bag, Phosphor Bronze, 0.76µm Gold (Au)                                | <u>8580115</u> |
|  | KK 156 TERM CRP 18-20 AWG TRIFURCON GOLD                                                                     | <u>8580118</u> |
|  | KK 396 Crimp Terminal 2478, 18-24 AWG, Reel, Phosphor Bronze, 0.51µm Selective Gold (Au)                     | <u>8580121</u> |
|  | KK 396 Crimp Terminal 2578, 22-26 AWG, Reel, Phosphor Bronze, 0.51µm Selective Gold (Au)                     | <u>8580125</u> |
|  | 3.96mm Pitch KK Crimp Terminal 2878, 18-20 AWG, Bag, Phosphor Bronze, 0.51µm Selective Gold (Au), Bifurcated | <u>8580128</u> |
|  | KK 396 Crimp Terminal 8818, 18-22 AWG, Reel, Phosphor Bronze Selective Gold (Au)                             | <u>8580135</u> |
|  | KK Trifurcon Crimp Terminal 6438, 18-20 AWG, Reel, Phosphor Bronze Gold (Au)                                 | <u>8580187</u> |
|  | KK Trifurcon Crimp Terminal 6438, 18-20 AWG, Bag, Phosphor Bronze Gold(Au)                                   | <u>8580189</u> |
|  | KK 396 Crimp Terminal 2578, 22-26 AWG, Reel, Phosphor Bronze, 3.810µm Tin (Sn)                               | <u>8600003</u> |
|  | KK 396 Crimp Terminal 2578, 22-26 AWG, Bag, Phosphor Bronze, 3.810µm Tin (Sn)                                | <u>8600004</u> |
|  | KK 254 Crimp Terminal 8088, 22-30                                                                            | <u>8650105</u> |

|                                                                                                                                |                |
|--------------------------------------------------------------------------------------------------------------------------------|----------------|
| AWG, Gold/Nickel,<br>Reel                                                                                                      |                |
| KK 396 Crimp<br>Terminal 2578,<br>22-26 AWG, Reel,<br>Phosphor Bronze,<br>0.76µm Select Gold<br>(Au) over Gold Flash           | <u>8650110</u> |
| KK 396 Crimp<br>Terminal 2578,<br>22-26 AWG, Bag,<br>Phosphor Bronze,<br>0.38µm Selective<br>Gold (Au)                         | <u>8650117</u> |
| 3.96mm Pitch KK<br>Crimp Terminal<br>2878, 18-20 AWG,<br>Bag, Phosphor<br>Bronze, 0.38µm<br>Selective Gold (Au),<br>Bifurcated | <u>8650119</u> |
| KK Trifurcon Crimp<br>Terminal 7258,<br>22-26 AWG, Reel,<br>Phosphor Bronze<br>Selective Gold (Au)                             | <u>8650121</u> |
| KK Trifurcon Crimp<br>Terminal 7258,<br>22-26 AWG, Bag,<br>Phosphor Bronze<br>Selective Gold (Au)                              | <u>8650122</u> |
| KK 396 Crimp<br>Terminal 8818,<br>18-22 AWG, Reel,<br>Phosphor Bronze<br>Selective Gold (Au)                                   | <u>8650128</u> |
| KK 396 Crimp<br>Terminal 8818,<br>18-22 AWG, Bag,<br>Phosphor Bronze<br>Selective Gold (Au)                                    | <u>8650129</u> |
| KK 100 Crp Term<br>Std 22-30 Awg<br>SGold                                                                                      | <u>8650801</u> |
| KK 254 Cat Ear<br>Crimp Terminal<br>41572, Reel Tin (Sn)                                                                       | <u>8650804</u> |
| KK 254 Cat Ear<br>Crimp Terminal<br>41572, Bag Tin (Sn)                                                                        | <u>8650805</u> |
| KK 100 Crp Term<br>Std 22-30 Awg<br>SGold                                                                                      | <u>8650811</u> |
| KK 100 Crp Term<br>Std 22-30 Awg<br>SGold                                                                                      | <u>8650812</u> |
| KK 254 Crimp<br>Terminal 6459,<br>22-30 AWG, Reel,<br>Phosphor Bronze<br>Gold (Au)                                             | <u>8650813</u> |
| KK 254 Crimp<br>Terminal 6459,<br>22-30 AWG, Bag,                                                                              | <u>8650814</u> |

|                      |                |
|----------------------|----------------|
| Phosphor Bronze      |                |
| Gold (Au)            |                |
| KK 254 Crimp         | <u>8650815</u> |
| Terminal 6459,       |                |
| 22-30 AWG, Reel,     |                |
| Phosphor Bronze      |                |
| Selective Gold (Au)  |                |
| KK 254 Crimp         | <u>8650816</u> |
| Terminal 6459,       |                |
| 22-30 AWG, Bag,      |                |
| Phosphor Bronze      |                |
| Selective Gold (Au)  |                |
| KK 100 Crp Term      | <u>8650817</u> |
| Std 22-30 Awg        |                |
| SGold                |                |
| 4.80mm Pitch Crimp   | <u>8700002</u> |
| Terminal, Male, Reel |                |
| 3.96 and 5.08mm      | <u>8700012</u> |
| Pitch KK Cat Ear     |                |
| Crimp Terminal,      |                |
| Female, 18-24 AWG,   |                |
| Reel                 |                |
| 4.80mm Pitch Crimp   | <u>8700042</u> |
| Terminal, Female,    |                |
| Bag                  |                |
| 4.80mm Pitch Crimp   | <u>8700043</u> |
| Terminal, Male, Bag  |                |
| KK Cat Ear Crimp     | <u>8700048</u> |
| Terminal 5159,       |                |
| 22-28 AWG, Reel,     |                |
| Phosphor Bronze,     |                |
| Tin (Sn) Plating     |                |
| KK Cat Ear Crimp     | <u>8700049</u> |
| Terminal 5159,       |                |
| 22-28 AWG, Bag,      |                |
| Phosphor Bronze,     |                |
| Tin (Sn) Plating     |                |
| SPOX Crimp           | <u>8700056</u> |
| Terminal 5103, 22-28 |                |
| AWG, Reel, Brass     |                |
| (CuZn), Chain Type   |                |
| SPOX Crimp           | <u>8700058</u> |
| Terminal 5103,       |                |
| 22-28 AWG, Reel,     |                |
| Phosphor Bronze      |                |
| (CuSn), Chain Type   |                |
| KK Cat Ear Crimp     | <u>8700069</u> |
| Terminal 5159, 22-28 |                |
| AWG, Bag, Brass,     |                |
| Tin (Sn) over Copper |                |
| Plating              |                |
| 2.50mm Pitch         | <u>8700103</u> |
| Mini-Latch Crimp     |                |
| Terminal, Male,      |                |
| Brass, Bag           |                |
| Board-in Crimp       | <u>8700106</u> |
| Terminal , Series    |                |
| 5298, Male, with Tin |                |
| Insulation Diameter, |                |
| Reel Packaged        |                |
| .062DIA CRIMP        | <u>8701011</u> |
| REC.                 |                |
| .062DIA CRIMP        | <u>8701012</u> |
| REC.                 |                |
| .062DIA CRIMP PIN    | <u>8701013</u> |

|                       |                |
|-----------------------|----------------|
| .062DIA CRIMP PIN     | <u>8701014</u> |
| SPOX Crimp            | <u>8701031</u> |
| Terminal, 18-24       |                |
| AWG, Brass, Reel      |                |
| 2.5 Low Profile       | <u>8701047</u> |
| Crimp Rec Chain W/    |                |
| Plt                   |                |
| 3.96mm Pitch KK       | <u>9011036</u> |
| Crimp Housing, Edge   |                |
| Card Connector,       |                |
| Single-Sided,         |                |
| Polarized, Positive   |                |
| Lock, with Probe      |                |
| Hole, 3 Circuits      |                |
| KK 156 PC Board       | <u>9485088</u> |
| Connector, Top        |                |
| Entry, Polyester      |                |
| Connector, Tin (Sn),  |                |
| 8 Circuits            |                |
| 3.96mm Pitch SPOX     | <u>9501023</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 2      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501033</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 3      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501043</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 4      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501053</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 5      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501063</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 6      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501073</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 7      |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501091</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp, 9 Circuits,     |                |
| Natural               |                |
| 3.96mm Pitch SPOX     | <u>9501103</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 10     |                |
| Circuits, Natural     |                |
| 3.96mm Pitch SPOX     | <u>9501113</u> |
| Crimp Housing,        |                |
| Female, with Friction |                |
| Ramp and Void, 11     |                |
| Circuits, Natural     |                |

|  |                                                                                           |                |
|--|-------------------------------------------------------------------------------------------|----------------|
|  | KK 3.96mm Crimp Terminal Housing, Friction Ramp, 14 Circuits, Natural                     | <u>9503141</u> |
|  | 3.96mm Pitch KK Crimp Housing, Female, Friction Ramp, 2 Circuits, Natural                 | <u>9524024</u> |
|  | 3.96mm Pitch KK Crimp Housing, Female, Friction Ramp, 3 Circuits, Natural                 | <u>9524034</u> |
|  | 3.96mm Pitch KK Crimp Housing, Female, Friction Ramp, 4 Circuits, Natural                 | <u>9524044</u> |
|  | 3.96mm Pitch KK Crimp Housing, Female, Friction Ramp, 5 Circuits, Natural                 | <u>9524054</u> |
|  | 3.96mm Pitch KK Crimp Housing, Female, Friction Ramp, 6 Circuits, Natural                 | <u>9524064</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, 2 Circuits            | <u>9652028</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, 3 Circuits            | <u>9652038</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, with Void, 3 Circuits | <u>9652039</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, 4 Circuits            | <u>9652048</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, 5 Circuits            | <u>9652058</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, with Void, 6 Circuits | <u>9652069</u> |
|  | SPOX and KK 396 Wire-to-Board Header, Vertical, with Friction Lock, 7 Circuits            | <u>9652078</u> |

|  |                                                                                                       |                 |
|--|-------------------------------------------------------------------------------------------------------|-----------------|
|  | SPOX and KK<br>396 Wire-to-Board<br>Header, Vertical,<br>with Friction Lock, 8<br>Circuits            | <u>9652088</u>  |
|  | SPOX and KK<br>396 Wire-to-Board<br>Header, Vertical, with<br>Friction Lock, with<br>Void, 8 Circuits | <u>9652089</u>  |
|  | 15 PIN MICRO-<br>D FEMAL ASSY<br>M8351309B11                                                          | <u>10008503</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Terminal<br>Housing, 5 Circuits,<br>Natural                                | <u>10013056</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Terminal<br>Housing, 6 Circuits,<br>Natural                                | <u>10013066</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Terminal<br>Housing, 7 Circuits,<br>Natural                                | <u>10013076</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Terminal<br>Housing, 8 Circuits,<br>Natural                                | <u>10013086</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Terminal<br>Housing, 9 Circuits,<br>Natural                                | <u>10013096</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 2<br>Circuits            | <u>10021022</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 3<br>Circuits            | <u>10021032</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 6<br>Circuits            | <u>10021062</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 8<br>Circuits            | <u>10021082</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 10<br>Circuits           | <u>10021102</u> |
|  | KK PC Board<br>Connector, Bottom<br>Entry Mount Style B,<br>1.00µm Tin (Sn), 11<br>Circuits           | <u>10021112</u> |
|  | KK PC Board<br>Connector, Bottom                                                                      | <u>10021122</u> |

Entry Mount Style B,  
1.00µm Tin (Sn), 12  
Circuits  
KK Header, Right [10061055](#)  
Angle, Square Pin,  
5 Circuits, Tin (Sn)  
Plating  
KK Header, Vertical, [10081021](#)  
Round Pin, 2  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081029](#)  
Round Pin, 2  
Circuits, Tin (Sn)  
Plating, Pin Length  
20.32mm  
KK Header, Vertical, [10081031](#)  
Round Pin, 3  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081039](#)  
Round Pin, 3  
Circuits, Tin (Sn)  
Plating, Pin Length  
20.32mm  
KK Header, Vertical, [10081041](#)  
Round Pin, 4  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081049](#)  
Round Pin, 4  
Circuits, Tin (Sn)  
Plating, Pin Length  
20.32mm  
KK Header, Vertical, [10081051](#)  
Round Pin, 5  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081061](#)  
Round Pin, 6  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081069](#)  
Round Pin, 6  
Circuits, Tin (Sn)  
Plating, Pin Length  
20.32mm  
KK Header, Vertical, [10081071](#)  
Round Pin, 7  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081081](#)  
Round Pin, 8  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081082](#)  
Round Pin, 8  
Circuits, Tin (Sn)

Plating, Pin Length  
23.80mm  
KK Header, Vertical, [10081091](#)  
Round Pin, 9  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081101](#)  
Round Pin, 10  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081102](#)  
Round Pin, 10  
Circuits, Tin (Sn)  
Plating, Pin Length  
23.80mm  
KK Header, Vertical, [10081111](#)  
Round Pin, 11  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10081121](#)  
Round Pin, 12  
Circuits, Tin (Sn)  
Plating, Pin Length  
19.05mm  
KK Header, Vertical, [10085021](#)  
with Polarizing  
Backwall, 2 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085031](#)  
with Polarizing  
Backwall, 3 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085041](#)  
with Polarizing  
Backwall, 4 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085051](#)  
with Polarizing  
Backwall, 5 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085061](#)  
with Polarizing  
Backwall, 6 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085071](#)  
with Polarizing  
Backwall, 7 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085081](#)  
with Polarizing  
Backwall, 8 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085091](#)  
with Polarizing  
Backwall, 9 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085101](#)  
with Polarizing  
Backwall, 10 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, [10085111](#)  
with Polarizing

Backwall, 11 Circuits,  
Tin (Sn) Plating  
KK Header, Vertical, 10085121  
with Polarizing  
Backwall, 12 Circuits,  
Tin (Sn) Plating  
KK PC Board 10101021  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 2  
Circuits  
KK PC Board 10101023  
Connector, Top  
Entry Mount Style C,  
1.00μm Tin (Sn), 2  
Circuits  
KK PC Board 10101031  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 3  
Circuits  
KK PC Board 10101033  
Connector, Top  
Entry Mount Style C,  
1.00μm Tin (Sn), 3  
Circuits  
KK PC Board 10101041  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 4  
Circuits  
KK PC Board 10101043  
Connector, Top  
Entry Mount Style C,  
1.00μm Tin (Sn), 4  
Circuits  
KK PC Board 10101051  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 5  
Circuits  
KK PC Board 10101053  
Connector, Top  
Entry Mount Style C,  
1.00μm Tin (Sn), 5  
Circuits  
KK PC Board 10101061  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 6  
Circuits  
KK PC Board 10101063  
Connector, Top  
Entry Mount Style C,  
1.00μm Tin (Sn), 6  
Circuits  
KK PC Board 10101071  
Connector, Right-  
Angle Mount Style A,  
1.00μm Tin (Sn), 7  
Circuits  
KK PC Board 10101073  
Connector, Top  
Entry Mount Style C,

|  |                                                                                       |                 |
|--|---------------------------------------------------------------------------------------|-----------------|
|  | 1.00µm Tin (Sn), 7<br>Circuits                                                        |                 |
|  | KK PC Board                                                                           | <u>10101081</u> |
|  | Connector, Right-<br>Angle Mount Style A,<br>1.00µm Tin (Sn), 8<br>Circuits           |                 |
|  | KK PC Board                                                                           | <u>10101083</u> |
|  | Connector, Top<br>Entry Mount Style C,<br>1.00µm Tin (Sn), 8<br>Circuits              |                 |
|  | KK PC Board                                                                           | <u>10101091</u> |
|  | Connector, Right-<br>Angle Mount Style A,<br>1.00µm Tin (Sn), 9<br>Circuits           |                 |
|  | KK PC Board                                                                           | <u>10101093</u> |
|  | Connector, Top<br>Entry Mount Style C,<br>1.00µm Tin (Sn), 9<br>Circuits              |                 |
|  | KK PC Board                                                                           | <u>10101101</u> |
|  | Connector, Right-<br>Angle Mount Style A,<br>1.00µm Tin (Sn), 10<br>Circuits          |                 |
|  | KK PC Board                                                                           | <u>10101103</u> |
|  | Connector, Top<br>Entry Mount Style C,<br>1.00µm Tin (Sn), 10<br>Circuits             |                 |
|  | KK PC Board                                                                           | <u>10101113</u> |
|  | Connector, Top<br>Entry Mount Style C,<br>1.00µm Tin (Sn), 11<br>Circuits             |                 |
|  | KK PC Board                                                                           | <u>10101121</u> |
|  | Connector, Right-<br>Angle Mount Style A,<br>1.00µm Tin (Sn), 12<br>Circuits          |                 |
|  | KK PC Board                                                                           | <u>10101123</u> |
|  | Connector, Top<br>Entry Mount Style C,<br>1.00µm Tin (Sn), 12<br>Circuits             |                 |
|  | KK 254 Crimp                                                                          | <u>10112023</u> |
|  | Housing, High<br>Pressure, 2 Circuits,<br>Natural                                     |                 |
|  | KK 254 Crimp                                                                          | <u>10112043</u> |
|  | Housing, High<br>Pressure, 4 Circuits,<br>Natural                                     |                 |
|  | 2.36mm Diameter                                                                       | <u>10181031</u> |
|  | Standard .093" Pin<br>and Socket Header,<br>Shrouded, 3 Circuits,<br>2 Male Terminals |                 |
|  | 2.36mm Diameter                                                                       | <u>10181032</u> |
|  | Standard .093" Pin<br>and Socket Header,<br>Shrouded, 3 Circuits,<br>3 Male Terminals |                 |

|  |                       |                          |
|--|-----------------------|--------------------------|
|  | 2.36mm Diameter       | <a href="#">10181033</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 3 Circuits, |                          |
|  | 1 Female Terminal, 2  |                          |
|  | Male Terminals        |                          |
|  | 2.36mm Diameter       | <a href="#">10181034</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 3 Circuits, |                          |
|  | 1 Female Terminal, 2  |                          |
|  | Male Terminals        |                          |
|  | 2.36mm Diameter       | <a href="#">10181035</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 3 Circuits, |                          |
|  | 2 Male Terminals, 1   |                          |
|  | Female Terminal       |                          |
|  | 2.36mm Diameter       | <a href="#">10181036</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 3 Circuits, |                          |
|  | 1 Female Terminal, 1  |                          |
|  | Male Terminal         |                          |
|  | 2.36mm Diameter       | <a href="#">10181037</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 3 Circuits, |                          |
|  | 2 Female Terminals,   |                          |
|  | 1 Male Terminal       |                          |
|  | 2.36mm Diameter       | <a href="#">10181040</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 1 Female Terminal, 1  |                          |
|  | Male Terminal         |                          |
|  | 2.36mm Diameter       | <a href="#">10181041</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 4 Male Terminals      |                          |
|  | 2.36mm Diameter       | <a href="#">10181043</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 1 Female Terminal, 3  |                          |
|  | Male Terminals        |                          |
|  | 2.36mm Diameter       | <a href="#">10181044</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 3 Female Terminals,   |                          |
|  | 1 Male Terminals      |                          |
|  | 2.36mm Diameter       | <a href="#">10181045</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 2 Male Terminals, 2   |                          |
|  | Female Terminals      |                          |
|  | 2.36mm Diameter       | <a href="#">10181046</a> |
|  | Standard .093" Pin    |                          |
|  | and Socket Header,    |                          |
|  | Shrouded, 4 Circuits, |                          |
|  | 3 Male Terminals, 1   |                          |
|  | Female Terminal       |                          |

|  |                                                                                                                                                                                                |                 |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>Shrouded, 4 Circuits,<br>1 Female Terminal, 3<br>Male Terminals                                                                 | <u>10181047</u> |
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>Shrouded, 4 Circuits,<br>1 Female Terminal,<br>2 Male Terminals, 1<br>Female Terminal, 1<br>Male Terminal                       | <u>10181048</u> |
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>Shrouded, 4 Circuits,<br>2 Female Terminals,<br>1 Male Terminal, 1<br>Female Terminal,<br>1 Male Terminal, 1<br>Female Terminal | <u>10181049</u> |
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>Shrouded, 4 Circuits,<br>2 Female Terminals,<br>2 Male Terminals                                                                | <u>10181050</u> |
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>Shrouded, 9 Circuits,<br>9 Male Terminals                                                                                       | <u>10181090</u> |
|  | 2.36mm Diameter<br>Standard .093" Pin<br>and Socket Header,<br>3 Rows, Shrouded,<br>Unfilled Polyester,<br>UL 94V-0, 9 Circuits,<br>9 Female Terminals                                         | <u>10181091</u> |
|  | 2.36mm Diameter<br>Standard .093"<br>Pin and Socket<br>Header, Shrouded,<br>12 Circuits, 12 Male<br>Terminals                                                                                  | <u>10181120</u> |
|  | 2.36mm Diameter<br>Standard .093"<br>Pin and Socket<br>Header, 3 Rows,<br>Shrouded, Unfilled<br>Polyester, UL 94V-0,<br>12 Circuits, 12<br>Female Terminals                                    | <u>10181122</u> |
|  | 5.08mm Pitch SPOX<br>Crimp Housing,<br>Female, with Friction<br>Ramp and Void, 2<br>Circuits                                                                                                   | <u>10221022</u> |
|  | 5.00/7.50mm Pitch<br>SPOX Header,<br>Vertical, with Friction<br>Lock, 2 Circuits                                                                                                               | <u>10311028</u> |

5.00/7.50mm Pitch [10311038](#)  
SPOX Header,  
Vertical, with Friction  
Lock, 3 Circuits  
5.00/7.50mm Pitch [10311048](#)  
SPOX Header,  
Vertical, with Friction  
Lock, 4 Circuits  
5.00/7.50mm Pitch [10311058](#)  
SPOX Header,  
Vertical, with Friction  
Lock, 5 Circuits  
5.08mm Pitch SPOX [10321021](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 2  
Circuits  
5.08mm Pitch SPOX [10321031](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 3  
Circuits  
5.08mm Pitch SPOX [10321041](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 4  
Circuits  
5.08mm Pitch SPOX [10321051](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 5  
Circuits  
5.08mm Pitch SPOX [10321061](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 6  
Circuits  
5.08mm Pitch SPOX [10321071](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 7  
Circuits  
5.08mm Pitch SPOX [10321091](#)  
Wire-to-Board  
Header, Vertical,  
with Friction Lock, 9  
Circuits  
5.08mm Pitch SPOX [10631029](#)  
Wire-to-Board  
Header, Vertical,  
Friction Lock, with  
Void, 2 Circuits  
5.00mm Pitch SPOX [10633024](#)  
Crimp Housing,  
Female, with Friction  
Ramp and Void, 2  
Circuits, Natural  
5.00mm Pitch SPOX [10633034](#)  
Crimp Housing,  
Female, with Friction  
Ramp and Void, 3  
Circuits, Natural  
5.00mm Pitch SPOX [10633044](#)  
Crimp Housing,  
Female, with Friction

Ramp and Void, 4  
Circuits, Natural  
5.00mm Pitch SPOX [10633054](#)  
Crimp Housing,  
Female, with Friction  
Ramp and Void, 5  
Circuits, Natural  
5.00mm Pitch SPOX [10633064](#)  
Crimp Housing,  
Female, with Friction  
Ramp and Void, 6  
Circuits, Natural  
7.92mm Pitch SPOX [10634027](#)  
Header, Vertical,  
with Friction Lock, 2  
Circuits  
7.92mm Pitch SPOX [10634037](#)  
Header, Vertical,  
with Friction Lock, 3  
Circuits  
7.92mm Pitch SPOX [10634047](#)  
Header, Vertical,  
with Friction Lock, 4  
Circuits  
7.92mm Pitch SPOX [10634057](#)  
Header, Vertical,  
with Friction Lock, 5  
Circuits  
6.35mm Pitch MLX [10844020](#)  
Power Connector  
Header, Vertical,  
2 Circuits, PA  
Polyamide Nylon  
6/6 94V-2, Tin (Sn)  
Plating, White  
6.35mm Pitch MLX [10844022](#)  
Power Connector,  
2.13mm Contact  
Diameter, Vertical,  
PA Polyamide  
(Nylon) 6/6, Tin (Sn),  
White, 2 Circuits  
2.13mm Diameter [10844025](#)  
MLX Power  
Connector Header,  
Vertical, 2 Circuits,  
Polyester 94V-0,  
0.76µm Gold (Au)  
Selective Plating,  
Brick Red  
6.35mm Pitch MLX [10844030](#)  
Power Connector  
Header, Vertical,  
3 Circuits, PA  
Polyamide Nylon  
6/6 94V-2, Tin (Sn)  
Plating, White  
6.35mm Pitch MLX [10844032](#)  
Power Connector,  
2.13mm Contact  
Diameter, Vertical,  
PA Polyamide  
(Nylon) 6/6, Tin (Sn),  
White, 3 Circuits

|  |                                                                                                                                                            |                                 |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PA Polyamide<br>(Nylon) 6/6. Gold<br>(Au) Selective,<br>White, 3 Circuits | <a href="#"><u>10844036</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester, Gold<br>(Au) Selective, Brick<br>Red, 3 Circuits           | <a href="#"><u>10844037</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical,<br>4 Circuits, PA<br>Polyamide Nylon<br>6/6 94V-2, Tin (Sn)<br>Plating, White                     | <a href="#"><u>10844040</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PA Polyamide<br>(Nylon) 6/6, Tin (Sn),<br>White, 4 Circuits               | <a href="#"><u>10844042</u></a> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 4 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>Brick Red      | <a href="#"><u>10844045</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester, Gold<br>(Au) Selective, Brick<br>Red, 4 Circuits           | <a href="#"><u>10844047</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical,<br>6 Circuits, PA<br>Polyamide Nylon<br>6/6 94V-2, Tin (Sn)<br>Plating, White                     | <a href="#"><u>10844060</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical,<br>9 Circuits, PA<br>Polyamide Nylon<br>6/6 94V-2, Tin (Sn)<br>Plating, White                     | <a href="#"><u>10844090</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PA Polyamide<br>(Nylon) 6/6, Tin (Sn),<br>White, 9 Circuits               | <a href="#"><u>10844092</u></a> |

|  |                                                                                                                                                                 |                 |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical,<br>12 Circuits, PA<br>Polyamide Nylon<br>6/6 94V-2, Tin (Sn)<br>Plating, White                         | <u>10844120</u> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PA Polyamide<br>(Nylon) 6/6, Tin (Sn),<br>White, 12 Circuits                   | <u>10844122</u> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 12 Circuits,<br>PA Polyamide Nylon<br>6/6 94V-2, 0.76µm<br>Gold (Au) Selective<br>Plating, White | <u>10844124</u> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 12 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>Brick Red          | <u>10844125</u> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical,<br>15 Circuits, PA<br>Polyamide Nylon<br>6/6 94V-2, Tin (Sn)<br>Plating, White                         | <u>10844150</u> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PA Polyamide<br>(Nylon) 6/6, Tin (Sn),<br>White, 15 Circuits                   | <u>10844152</u> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 15 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>Brick Red          | <u>10844155</u> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical, 2<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White                                          | <u>10845020</u> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>Polyester 94V-0,<br>White/Natural, 2<br>Circuits                               | <u>10845021</u> |

|  |                                                                                                                                                   |                                 |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 2 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>White | <a href="#"><u>10845022</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical, 3<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White                            | <a href="#"><u>10845030</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 3<br>Circuits                 | <a href="#"><u>10845031</u></a> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 3 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>White | <a href="#"><u>10845032</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical, 4<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White                            | <a href="#"><u>10845040</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 4<br>Circuits                 | <a href="#"><u>10845041</u></a> |
|  | 2.13mm Diameter<br>MLX Power<br>Connector Header,<br>Vertical, 4 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>White | <a href="#"><u>10845042</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector<br>Header, Vertical, 6<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White                            | <a href="#"><u>10845060</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 6<br>Circuits                 | <a href="#"><u>10845061</u></a> |
|  | 6.35mm Pitch MLX<br>Power Connector                                                                                                               | <a href="#"><u>10845090</u></a> |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Header, Vertical, 9<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White<br>6.35mm Pitch MLX <a href="#">10845091</a><br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 9<br>Circuits<br>6.35mm Pitch MLX <a href="#">10845120</a><br>Power Connector<br>Header, Vertical, 12<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White<br>6.35mm Pitch MLX <a href="#">10845121</a><br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 12<br>Circuits<br>2.13mm Diameter <a href="#">10845122</a><br>MLX Power<br>Connector Header,<br>Vertical, 12 Circuits,<br>Polyester 94V-0,<br>0.76µm Gold (Au)<br>Selective Plating,<br>White<br>6.35mm Pitch MLX <a href="#">10845150</a><br>Power Connector<br>Header, Vertical, 15<br>Circuits, Polyester<br>94V-0, Tin (Sn)<br>Plating, White<br>6.35mm Pitch MLX <a href="#">10845151</a><br>Power Connector,<br>2.13mm Contact<br>Diameter, Vertical,<br>PCT Polyester,<br>Tin (Sn), White, 15<br>Circuits<br>2.54mm Pitch C-Grid <a href="#">10879805</a><br>Breakaway Header,<br>Dual Row, Vertical,<br>High Temperature,<br>80 Circuits, 0.76µm<br>Gold (Au) Selective<br>Plating, Tin(Sn) PC<br>Tail Plating, 2.72mm<br>PC Tail<br>2.54mm Pitch C-Grid <a href="#">10883061</a><br>Breakaway Header,<br>High Profile, Dual<br>Row, Right Angle,<br>6 Circuits, 6.10mm<br>Mating Pin Length,<br>Tin (Sn) Plating<br>2.54mm Pitch C-Grid <a href="#">10883081</a><br>Breakaway Header,<br>High Profile, Dual<br>Row, Right Angle, |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

8 Circuits, 6.10mm  
Mating Pin Length,  
Tin (Sn) Plating  
2.54mm Pitch C-Grid [10883102](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right Angle,  
10 Circuits, 8.13mm  
Mating Pin Length,  
Tin (Sn) Plating  
2.54mm Pitch C-Grid [10883142](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right Angle,  
14 Circuits, 8.13mm  
Mating Pin Length,  
Tin (Sn) Plating  
2.54mm Pitch C-Grid [10883182](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right Angle,  
18 Circuits, 8.13mm  
Mating Pin Length,  
Tin (Sn) Plating  
2.54mm Pitch C-Grid [10883282](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right Angle,  
28 Circuits, 8.13mm  
Mating Pin Length,  
Tin (Sn) Plating  
2.54mm Pitch C-Grid [10894047](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
4 Circuits, 8.13mm  
Mating Pin Length,  
0.76µm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894142](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
14 Circuits, 6.10mm  
Mating Pin Length,  
0.38µm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894186](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
18 Circuits, 6.10mm  
Mating Pin Length,  
0.76µm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894187](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
18 Circuits, 8.13mm  
Mating Pin Length,  
0.76µm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894227](#)  
Breakaway Header,

High Profile, Dual  
Row, Right-Angle,  
22 Circuits, 8.13mm  
Mating Pin Length,  
0.76μm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894247](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
24 Circuits, 8.13mm  
Mating Pin Length,  
0.76μm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894286](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
28 Circuits, 6.10mm  
Mating Pin Length,  
0.76μm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894287](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
28 Circuits, 8.13mm  
Mating Pin Length,  
0.76μm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10894302](#)  
Breakaway Header,  
High Profile, Dual  
Row, Right-Angle,  
30 Circuits, 6.10mm  
Mating Pin Length,  
0.38μm Gold (Au)  
Selective Plating  
2.54mm Pitch C-Grid [10897042](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
4 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897062](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
6 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897082](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
8 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897101](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
10 Circuits, Tin (Sn)  
Plating, 2.72mm PC  
Tail Length

2.54mm Pitch C-Grid [10897122](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
12 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897123](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
12 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail

2.54mm Pitch C-Grid [10897142](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
14 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897162](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
16 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897182](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
18 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897202](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
20 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897222](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,

22 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897242](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
24 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897260](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
26 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897262](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
26 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897263](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
26 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10897282](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
28 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897302](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
30 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897303](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
30 Circuits, 0.76μm  
Gold (Au) Selective

Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897322](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
32 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897360](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
36 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897362](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
36 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897380](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
38 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897423](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
42 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10897482](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
48 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897502](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
50 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC

Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897542](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
54 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897562](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
56 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897582](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
58 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897602](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
60 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897622](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
62 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897642](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
64 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail  
2.54mm Pitch C-Grid [10897682](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
68 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897702](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
70 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897722](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
72 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897742](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
74 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897762](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
76 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897782](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
78 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.72mm  
PC Tail

2.54mm Pitch C-Grid [10897803](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
80 Circuits, 0.76μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail

2.54mm Pitch C-Grid [10977046](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
4 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail

2.54mm Pitch C-Grid [10977106](#)  
Breakaway Header,

Dual Row, Vertical,  
High Temperature,  
10 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10977246](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
24 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10977285](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
28 Circuits, Tin (Sn)  
Plating, 2.79mm PC  
Tail Length  
2.54mm Pitch C-Grid [10977326](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
32 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10977345](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
34 Circuits, Tin (Sn)  
Plating, 2.79mm PC  
Tail Length  
2.54mm Pitch C-Grid [10977426](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
42 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10977486](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
48 Circuits, 0.38μm  
Gold (Au) Selective  
Plating, Tin (Sn) PC  
Tail Plating, 2.79mm  
PC Tail  
2.54mm Pitch C-Grid [10977805](#)  
Breakaway Header,  
Dual Row, Vertical,  
High Temperature,  
80 Circuits, Tin (Sn)  
Plating, 2.79mm PC  
Tail Length

|  |                                                                                             |                   |
|--|---------------------------------------------------------------------------------------------|-------------------|
|  | zQSFP+ Cage, 1-by-1 and Spring Fingers, SAN Heatsink, Single Lightpipes, 1 Rear Pin         | <u>1000141541</u> |
|  | zQSFP+ Cage, 1-by-1 and Spring Fingers, NET Heatsink, Single Lightpipes, 1 Rear Pin         | <u>1000141542</u> |
|  | zQSFP+ Cage, 1-by-1 and Spring Fingers, NET Heatsink, Double Lightpipes, 1 Rear Pin         | <u>1000141545</u> |
|  | zQSFP+ Cage, 1-by-1 and Spring Fingers, SAN Heatsink, Quad Lightpipes, 1 Rear Pin           | <u>1000141547</u> |
|  | zQSFP+ Cage, 1-by-1 and Spring Fingers, NET Heatsink, Quad Lightpipes, 1 Rear Pin           | <u>1000141548</u> |
|  | zQSFP+ Cage, 1-by-4 with Spring Fingers, with SAN Heatsink and 1 Rear Pin                   | <u>1000171344</u> |
|  | zQSFP+ Cage, 1-by-4 with Spring Fingers, with NET Heatsink and 1 Rear Pin                   | <u>1000171345</u> |
|  | zQSFP+ Cage, 1-by-4 and Spring Fingers, and NET Heatsink, Single Lightpipes with 1 Rear Pin | <u>1000171542</u> |
|  | zQSFP+ Cage, 1-by-4 and Spring Fingers, and SAN Heatsink, Double Lightpipes with 1 Rear Pin | <u>1000171544</u> |
|  | zQSFP+ Cage, 1-by-4 and Spring Fingers, and NET Heatsink, Double Lightpipes with 1 Rear Pin | <u>1000171545</u> |
|  | zQSFP+ Cage, 1-by-4 and Spring Fingers, and SAN Heatsink, Quad Lightpipes with 1 Rear Pin   | <u>1000171547</u> |

|  |                                                                                                                                               |                   |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|  | zQSFP+ Cage, 1-by-4 and Spring Fingers, and NET Heatsink, Quad Lightpipes with 1 Rear Pin                                                     | <u>1000171548</u> |
|  | zQSFP+ Cage, 1-by-6 with Spring Fingers, with NET Heatsink and 1 Rear Pin                                                                     | <u>1000861345</u> |
|  | zQSFP+ Cage, 1-by-6 and Spring Fingers, and SAN Heatsink, Quad Lightpipes with 1 Rear Pin                                                     | <u>1000861547</u> |
|  | Internal iPass+ HD-to-iPass+, 4X Short Body Cable Assembly, 100 Ohms, Straight-to-Straight, Controller to Controller, 0.30m Length            | <u>1001400201</u> |
|  | Internal iPass+ HD-to-iPass+, 4X Short Body Cable Assembly, 100 Ohms, Straight-to-Straight, Controller to Controller, 0.50m Length            | <u>1001400202</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-Angle Down-to-Straight, Controller to Backplane, 0.152m Length | <u>1001710100</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-Angle Down-to-Straight, Controller to Backplane, 0.30m Length  | <u>1001710101</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-Angle Down-to-Straight, Controller to Backplane, 0.50m Length  | <u>1001710102</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-                                                               | <u>1001710104</u> |

|  |                                                                                                                                                |                   |
|--|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|  | Angle Down-to-Straight, Controller to Backplane, 1.0m Length                                                                                   |                   |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-Angle Down-to-Straight, Controller to Controller, 0.152m Length | <u>1001710200</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Right-Angle Down-to-Straight, Controller to Controller, 0.30m Length  | <u>1001710201</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 100 Ohms, Straight-to-Straight, PCIe to PCIe, 0.50m Length                      | <u>1001890151</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 85 Ohms, Right-Angle Down-to-Straight, PCIE, 1.0m Length                        | <u>1002220304</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 4X Short Body Cable Assembly, 85 Ohms, Right Exit-to-Straight, Controller to Controller, 0.152m Length        | <u>1002235300</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 8X Short Body Cable Assembly, 85 Ohms, Right-Angle Down-to-Straight, Controller to Controller, 0.152m Length  | <u>1002250200</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 8X Short Body Cable Assembly, 85 Ohms, Right-Angle Down-to-Straight, PCIE, 0.30m Length                       | <u>1002250301</u> |
|  | Internal iPass+ HD-to-iPass+ HD, 8X Short Body Cable Assembly, 85 Ohms, Left Exit-to-Straight, Controller                                      | <u>1002260103</u> |

|  |                                                                                                                                      |                   |
|--|--------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|  | to Backplane, 0.60m Length                                                                                                           |                   |
|  | Internal iPass+ HD-to-iPass+ HD, 8X Short Body Cable Assembly, 85 Ohms, Left Exit-to-Straight, Controller to Controller, 1.0m Length | <u>1002260204</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 32 AWG, 1.0m Length                                                                                 | <u>1002971001</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 32 AWG, 2.0m Length                                                                                 | <u>1002971002</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 30 AWG, 0.50m Length                                                                                | <u>1002971051</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke Zero-halogen Cable, 30 AWG, 0.50m Length                                                 | <u>1002971056</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke, Zero-halogen, 30 AWG, 0.75m Length                                                      | <u>1002971076</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 30 AWG, 1.0m Length                                                                                 | <u>1002971101</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke Zero-halogen Cable, 30 AWG, 1.0m Length                                                  | <u>1002971106</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 30 AWG, 1.50m Length                                                                                | <u>1002971151</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke Zero-halogen Cable, 30 AWG, 1.5m Length                                                  | <u>1002971156</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 30 AWG, 2.0m Length                                                                                 | <u>1002971201</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke Zero-halogen Cable, 30 AWG, 2.0m Length                                                  | <u>1002971206</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 32 AWG, 1.50m Length                                                                                | <u>1002971215</u> |
|  | zQSFP+-to-zQSFP+ Cable Assembly, 30 AWG, 3.0m Length                                                                                 | <u>1002971301</u> |
|  | zQSFP+-to-zQSFP + Cable Assembly, Low-smoke Zero-halogen Cable, 30 AWG, 3.0m Length                                                  | <u>1002971306</u> |

|                                                                                                                      |                   |
|----------------------------------------------------------------------------------------------------------------------|-------------------|
| zQSFP+-to-zQSFP                                                                                                      | <u>1002973206</u> |
| + Cable Assembly,<br>Low-smoke Zero-<br>halogen Cable, 26<br>AWG, 2.0m Length                                        |                   |
| zQSFP+-to-zQSFP                                                                                                      | <u>1002973306</u> |
| + Cable Assembly,<br>Low-smoke Zero-<br>halogen Cable, 26<br>AWG, 3.0m Length                                        |                   |
| zQSFP+-to-zQSFP+                                                                                                     | <u>1002973401</u> |
| Cable Assembly, 26<br>AWG, 4.0m Length                                                                               |                   |
| zQSFP+-to-zQSFP                                                                                                      | <u>1002973506</u> |
| + Cable Assembly,<br>Low-smoke Zero-<br>halogen Cable, 26<br>AWG, 5.0m Length                                        |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451056</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Low-smoke Zero-<br>halogen Cable, 30<br>AWG, 0.5m Length |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451101</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Temp-Flex Cable, 30<br>AWG, 1.0m Length                  |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451106</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Low-smoke Zero-<br>halogen Cable, 30<br>AWG, 1.0m Length |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451151</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Temp-Flex Cable, 30<br>AWG, 1.5m Length                  |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451153</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Belden Cable, 30<br>AWG, 1.5m Length                     |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451156</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Low-smoke Zero-<br>halogen Cable, 30<br>AWG, 1.5m Length |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451201</u> |
| + Passive Cable<br>Assembly, 100<br>Gbps-to-(4) 25 Gbps,<br>Temp-Flex Cable, 30<br>AWG, 2.0m Length                  |                   |
| zQSFP+-to-4 zSFP                                                                                                     | <u>1003451203</u> |
| + Passive Cable                                                                                                      |                   |

Assembly, 100  
Gbps-to-(4) 25 Gbps,  
Belden Cable, 30  
AWG, 2.0m Length

This document was generated on 02/23/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**