
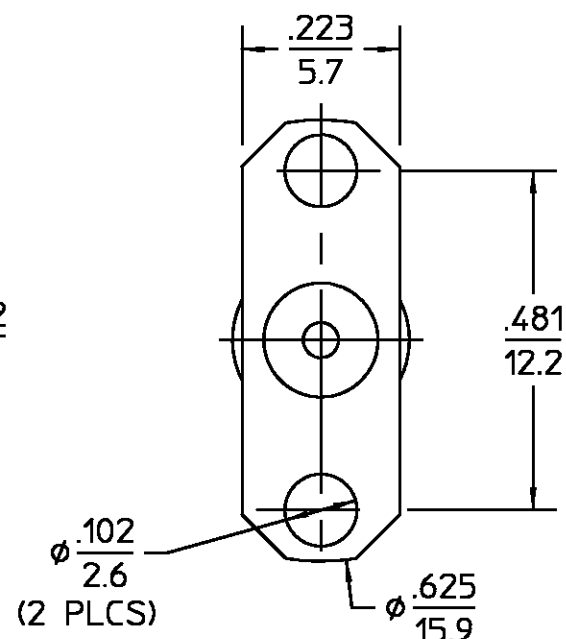


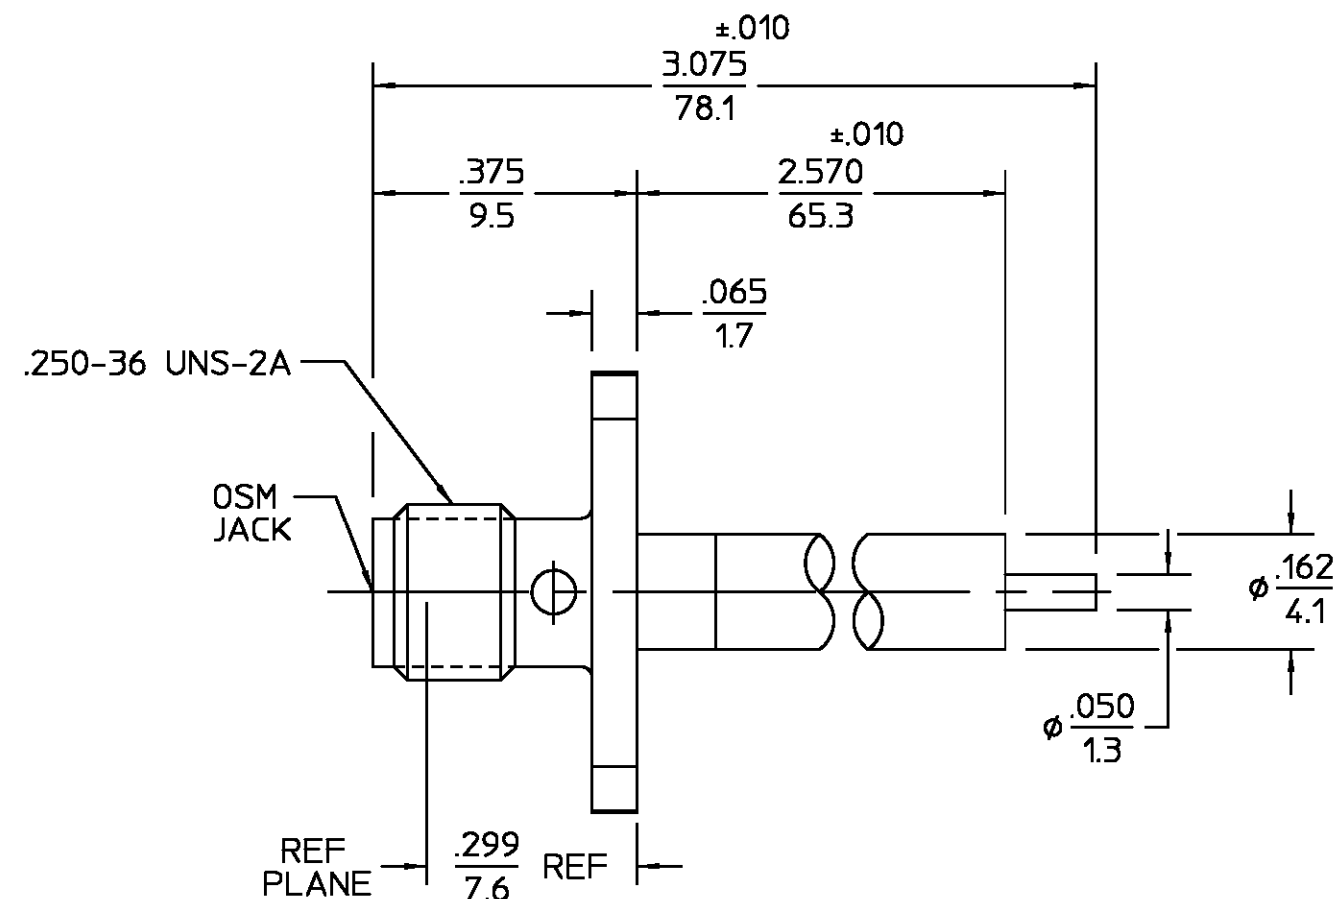

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	5/13/98	<i>DCamello</i>

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING		DIELECTRIC		CENTER CONTACT	
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>310-2</u>	Temperature Rating <u>-65°C To +125°C</u>	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		PTFE FLUOROCARBON PER ASTM-D-1457		BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	
Frequency Range (GHz) DC to <u>18</u>	Recommended Mating Torque <u>7-10 in-Lbs</u>	Vibration MIL-STD-202, Method 204, Condition B	GOLD PLATE PER MIL-G-45204		N/A		GOLD PLATE PER MIL-G-45204	
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>2.0</u>	Shock MIL-STD-202, Method 213, Condition I	FINISH		FINISH		FINISH	
VSWR <u>1.05 + .005f GHz</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B,	COMPONENT		MATERIAL		FINISH	
Insertion Loss (dB MAX) <u>.03 √f GHz</u>	Force to Engage and Disengage (In/Lbs MAX) <u>2</u>	Moisture Resistance MIL-STD-202, Method 106, Except Vibration	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		DRAWN BY <u>PATLAN</u> DATE <u>5/13/98</u>		AMP Incorporated	
RF Leakage (dB MIN) <u>-[60-f(GHz)]</u>	Center Contact Captivation	Shall Be Omitted	FRAC. DEC. ANGLES		CHECKED BY		140 Fourth Avenue	
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Axial (Lbs) <u>6.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	± 1/64 ±.005 ± 1°		APPD BY <i>DCamello</i> 5/13/98		Waltham, MA 02451-7599	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1000</u>	Radial (In/Oz) <u>4.0</u>		These drawings and specifications are the property of M/A-COM Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE		TITLE OSM FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL	
Contact Resistance (Milliohms MAX)	Weight (Grams) <u>2.2</u>		NO. AP. <u>N/A</u>		SIZE <u>B</u>		CODE IDENT NO. <u>26805</u>	
Center Contact <u>3.0</u>					SCALE <u>4 : 1</u>		2052-3995-00	
Outer Contact <u>2.0</u>							REV <u>010</u>	
Cable to Housing <u>N/A</u>							SHEET 1 OF 1	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>								
I.R.(Megohms MIN) <u>10,000</u>								

.XXX = in
XX.X = mm (REF)

CUSTOMER DRAWING

AMP PART # 1310267-1
SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1310267-1](#)