


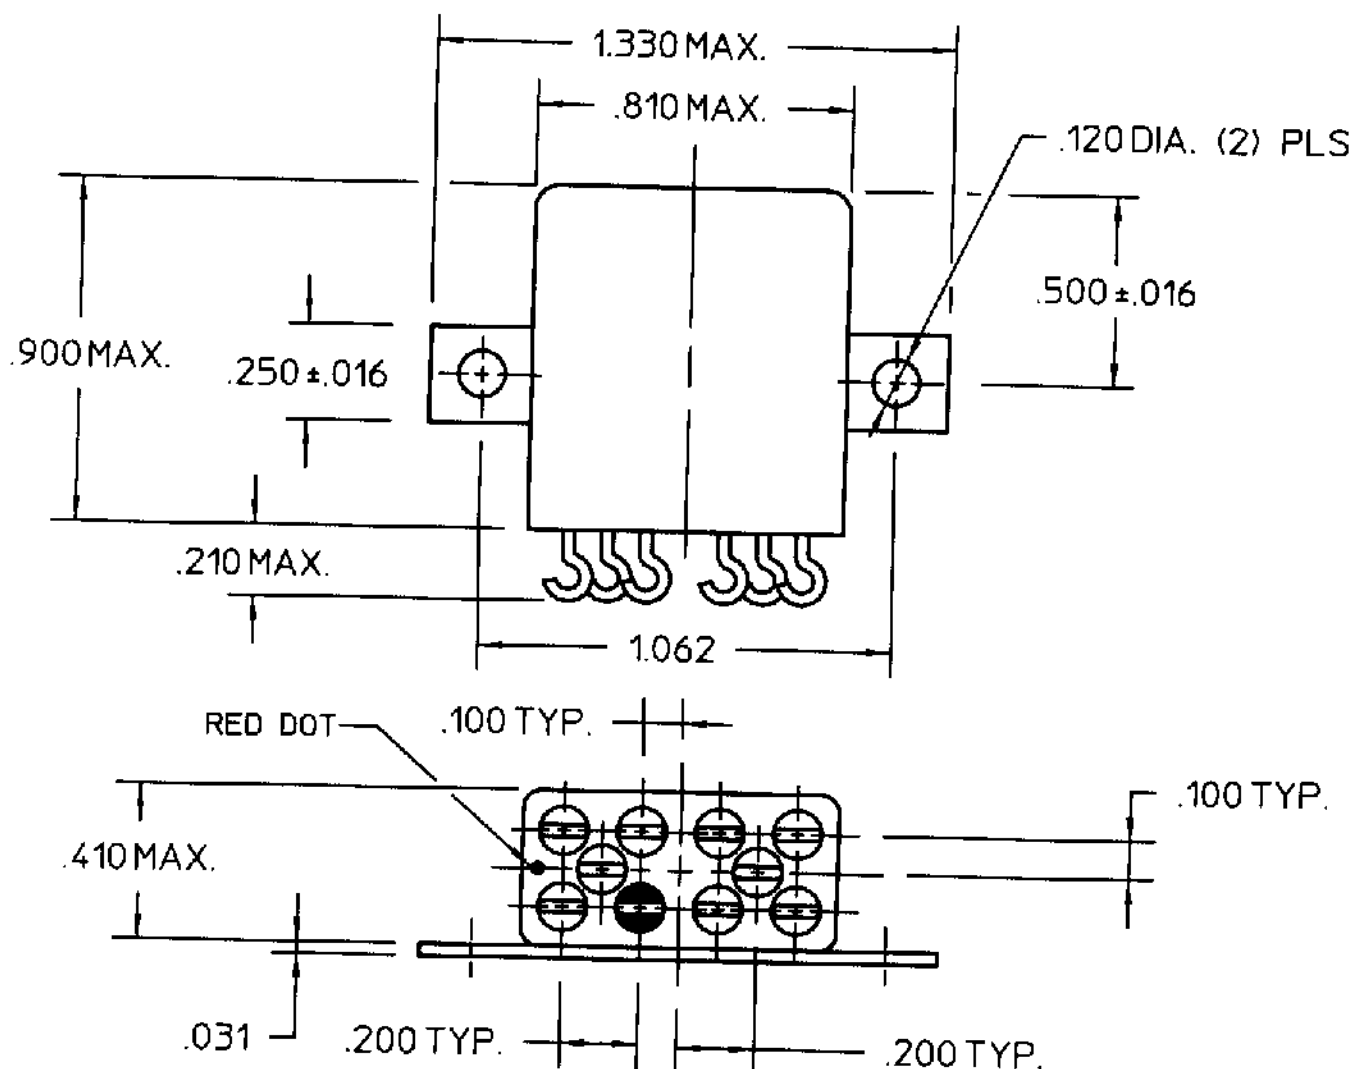

REV. 2

DCO 62990

COIL: @ 25°C

WINDING #1	WINDING #2
130 OHMS ±10%	130 OHMS ±10%
4.6 VDC MUST OPERATE	4.6 VDC MUST OPERATE
9.0 VDC NOMINAL VOLTAGE	9.0 VDC NOMINAL VOLTAGE

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

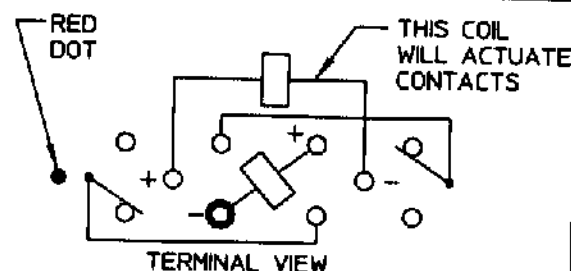

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 4/29/99 CK. 0310/4/00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. CII STD.

CUST. NO.

TYPE 'LF' RELAY

LF2111E00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[LF2111E00](#)