

C&K 3U Series Tiny Pushwheel Switches

Features/Benefits

- *Tiny size saves space*
- *10 and 16 position models available*
- *ESD clip available on select models*
- *Snap-in front mount saves assembly time*
- *Illuminated backlighting available*

Typical Applications

- *Computer peripherals*
- *Test equipment*
- *Instrumentation*



Specifications

CONTACT RATING:
 CARRY: 1 AMP continuous.
 SWITCH: 0.4 VA max., 100 mA max., 28 V DC max.
 OPERATING VOLTAGE: 50 mV to 28 V DC.
 ELECTRICAL LIFE: 1,000,000 actuations.
 CONTACT RESISTANCE: Below 300 m Ω typ. @
 2-4 V DC, 100 mA.
 INSULATION RESISTANCE: 10⁹ Ω min. (dry).
 DIELECTRIC STRENGTH: 500 Vrms min. @ sea level
 between common terminal and any output.
 OPERATING TEMPERATURE: -10°C to 65°C.


Materials

HOUSING: Polyester (UL 94V-0).
 PUSHWHEEL: Polycarbonate.
 PUSHBUTTON: Polyester (UL 94V-0).
 ROTOR CONTACTS: Gold over nickel over copper alloy.
 STATOR CONTACTS: Hard gold over nickel over copper on epoxy fiberglass.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages M-4 thru M-6. For additional options not shown in catalog, consult Customer Service Center. Consult factory for illumination availability.

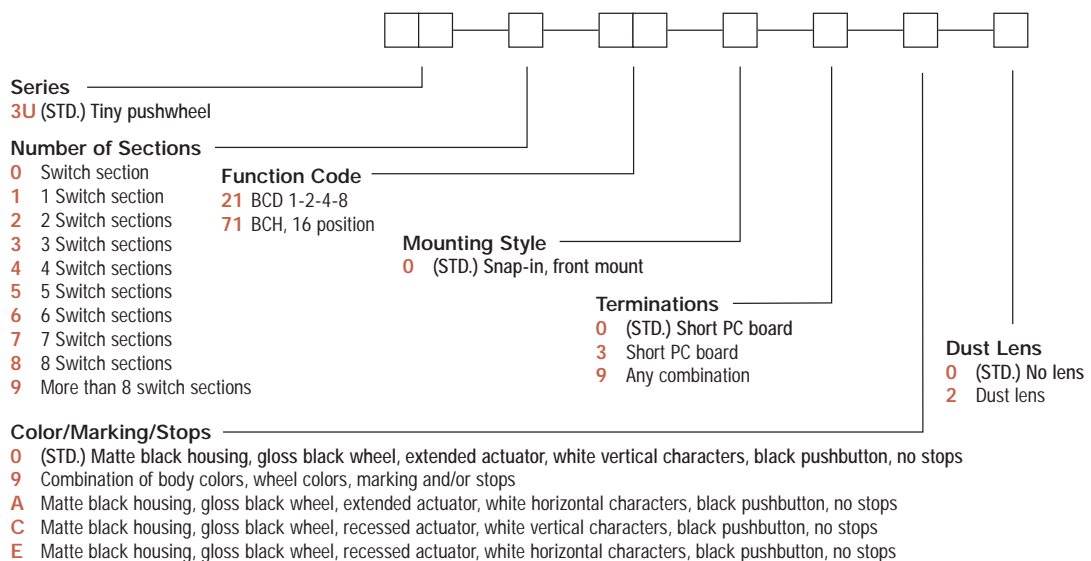

Thumbwheel & Pushwheel




M

C&K 3U Series Tiny Pushwheel Switches

SERIES

3U (STD.) 1/2" TINY PUSHWHEEL WITH EXTENDED ACTUATOR

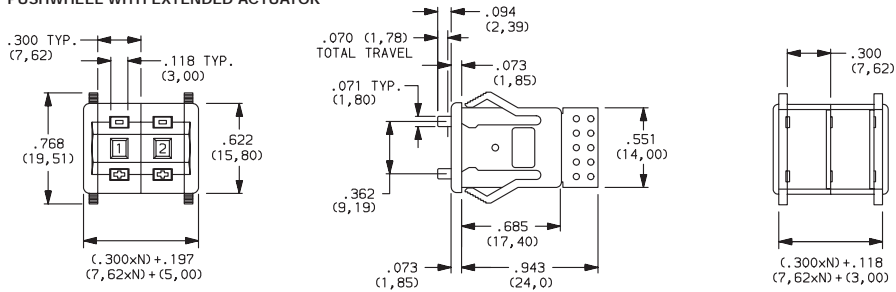

N = Number of sections.

NUMBER OF SECTIONS

- 0 Switch section only, no endplates.
- 1-8 Number of switch sections in assembly, includes endplates.
- 9 More than 8 switch sections, specify on CONFIGURATION FORM, page M-7 and consult Customer Service Center.

NOTE: Endplates and blank sections available separately, see page M-6.

FUNCTION CODE

21 BCD 1-2-4-8, 10 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3	●	●			●
4			●		●
5	●		●		●
6		●	●		●
7	●	●	●		●
8				●	●
9	●				●
	1	2	3	4	5
	TERM. LOCATION				

Available Terminations: 0, 3
See figs. 2 & 3, page M-5.

71 BINARY CODED HEXADECIMAL,
16 POSITION


W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3	●	●			●
4			●		●
5	●		●		●
6		●	●		●
7	●	●	●		●
8				●	●
9	●				●
A		●			●
B			●		●
C				●	●
D	●				●
E		●			●
F	●	●			●
	2	3	4	5	1
	TERM. LOCATION				

Available Terminations: 0, 3
See fig. 2, page M-5.

NOTE: ESD pin available, consult Customer Service Center.
For terminal location diagrams, see page M-5.

MOUNTING STYLE

0 (STD.) SNAP-IN FRONT MOUNTING



N = Number of sections

Recommended panel thickness:
.039-.156
(0,99-3,95)




Third Angle
Projection

Dimensions are shown: IN (mm)
Dimensions subject to change

www.ittcannon.com


TERMINATIONS

0 (STD.) SHORT PC BOARD



Not available with illuminated models.

3 SHORT PC BOARD, TYPE 0 WITH SOLDER PINS



Not available with illuminated models..

9 ANY COMBINATION OF TERMINATION CONFIGURATION OR SPECIAL TERMINATIONS.

Specify on configuration form, page M-7 and consult Customer Service Center.

PC Board 1/32" (0,79) thick.

NOTE: All terminal holes shown may not be present for all function codes, consult Customer Service Center.

Terminal Location Numbers

SOLDER PINS




Fig. 1



Fig. 2

NOTE: See function codes, page M-4 for signal locations.

COLOR/MARKING/STOPS


0 (STD.) MATTE BLACK HOUSING (Gloss black wheel with extended actuator, white vertical characters, black pushbuttons, no stops.)

9 SPECIAL COLORS, MARKINGS FOR HOUSING OR WHEEL, STOPS (Specify on CONFIGURATION FORM, page M-7 and consult Customer Service Center.)

A MATTE BLACK HOUSING (Gloss black wheel with white horizontal characters, extended actuator, black pushbuttons, no stops.)



C MATTE BLACK HOUSING (Gloss black wheel with white vertical characters, recessed actuator, black pushbuttons, no stops.)

E MATTE BLACK HOUSING (Gloss black wheel with white horizontal characters, recessed actuator, black pushbuttons, no stops.)





Vertical Characters

Horizontal Characters



Extended Actuator



Recessed Actuator



Third Angle
Projection

Dimensions are shown: IN (mm)
Dimensions subject to change

C&K 3U Series Tiny Pushwheel Switches

DUST LENS

- 0 (STD.) NO LENS
- 2 DUST LENS (Protects character face of the wheel from abrasion and dust.)

AVAILABLE HARDWARE

Blank section, .302 THK.
(Replaces active section.)



PART NO.
123B02000 BLACK
123B09000 GRAY

End plates



LEFT-with hole



RIGHT-with pin

PART NO.
113B02000 LEFT-BLACK
113B09000 LEFT-GRAY
114B02000 RIGHT-BLACK
114B09000 RIGHT-GRAY

One left and one right
piece required for
complete assembly.

Thumbwheel & Pushwheel



C&K 3U Series Tiny Pushwheel Switches

Configuration Form

GRAY SHADED AREAS TO BE FILLED IN BY CUSTOMER SERVICE.

CATALOG PART NO.

3 U

C&K PART NUMBER

C&K PART NUMBER

COMPANY NAME _____

CUSTOMER PRINT REVISION:

ADDRESS _____ TEL.# _____

CUSTOMER CONTACT _____ DATE _____

DETAILS:

ORIGINATED BY _____ SALES REP. _____

PUSHWHEEL SECTIONS	NO. OF SEC.	FUNCTION CODE- TERMINATIONS- COLOR/MARKING/STOPS/SEAL- ILLUMINATION <small>ENTER OPTION CODES IN APPROPRIATE BOXES. FUNCTION CODES INCLUDE BLANK SECTIONS (SEE PAGE M-4).</small>	DESCRIBE IN APPROPRIATE ROW
1	1	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
2	2	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
3	3	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
4	4	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
5	5	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
6	6	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
7	7	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
8	8	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
9	9	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
0	10	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
1	11	3 U - <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	

QUALITY CONTROL INSTRUCTIONS

PRODUCTION APPROVAL

DATE

Q.C. APPROVAL

DATE

REV.

INITIALS

DATE

FOR SWITCHES WITH MORE THAN 11 SECTIONS, CONTINUE ON ADDITIONAL SHEETS.

SPECIAL INSTRUCTIONS OR SPECIFICATIONS:

SHEET ____ OF ____

Thumbwheel & Pushwheel



M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[C&K Switches:](#)

[113B02000](#) [114B02000](#)