

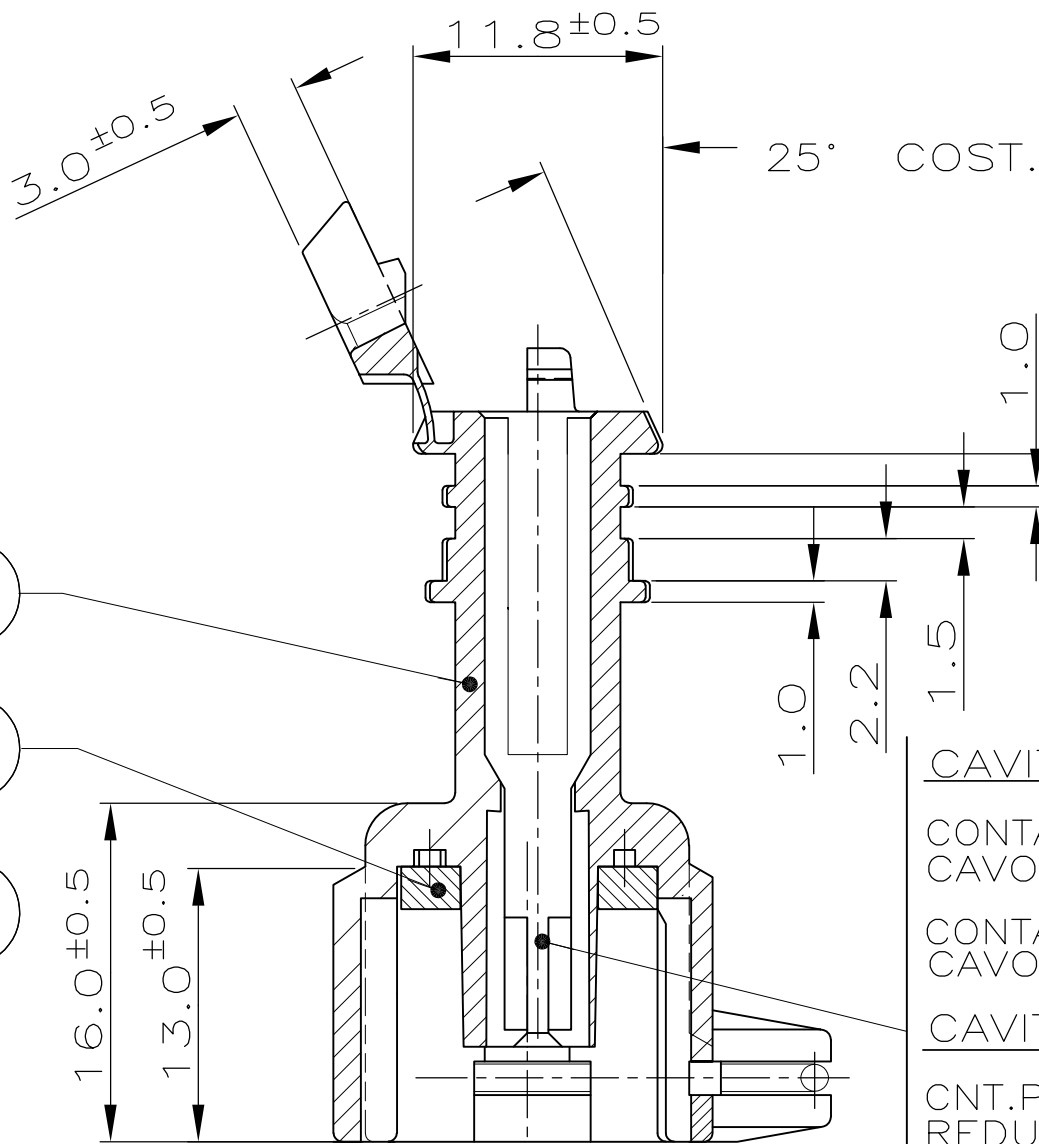


LOC	DIST	REVISIONS REVISIONI							
		P	LTR REV	DESCRIPTION DESCRIZIONE			DATE DATA	OWN DIS	APVD APP.
I	—		C1	REVISED PER ECO-11-005033			30MAR11	RK	HMR
			D	ECR-14-003472			24MAR14	MP	MG

CONNETTORE TIPO A (CON MOLLA DI RITEGNO ESTERNA)
CONNECTOR TYPE A (WITH EXTERNAL SPRING)

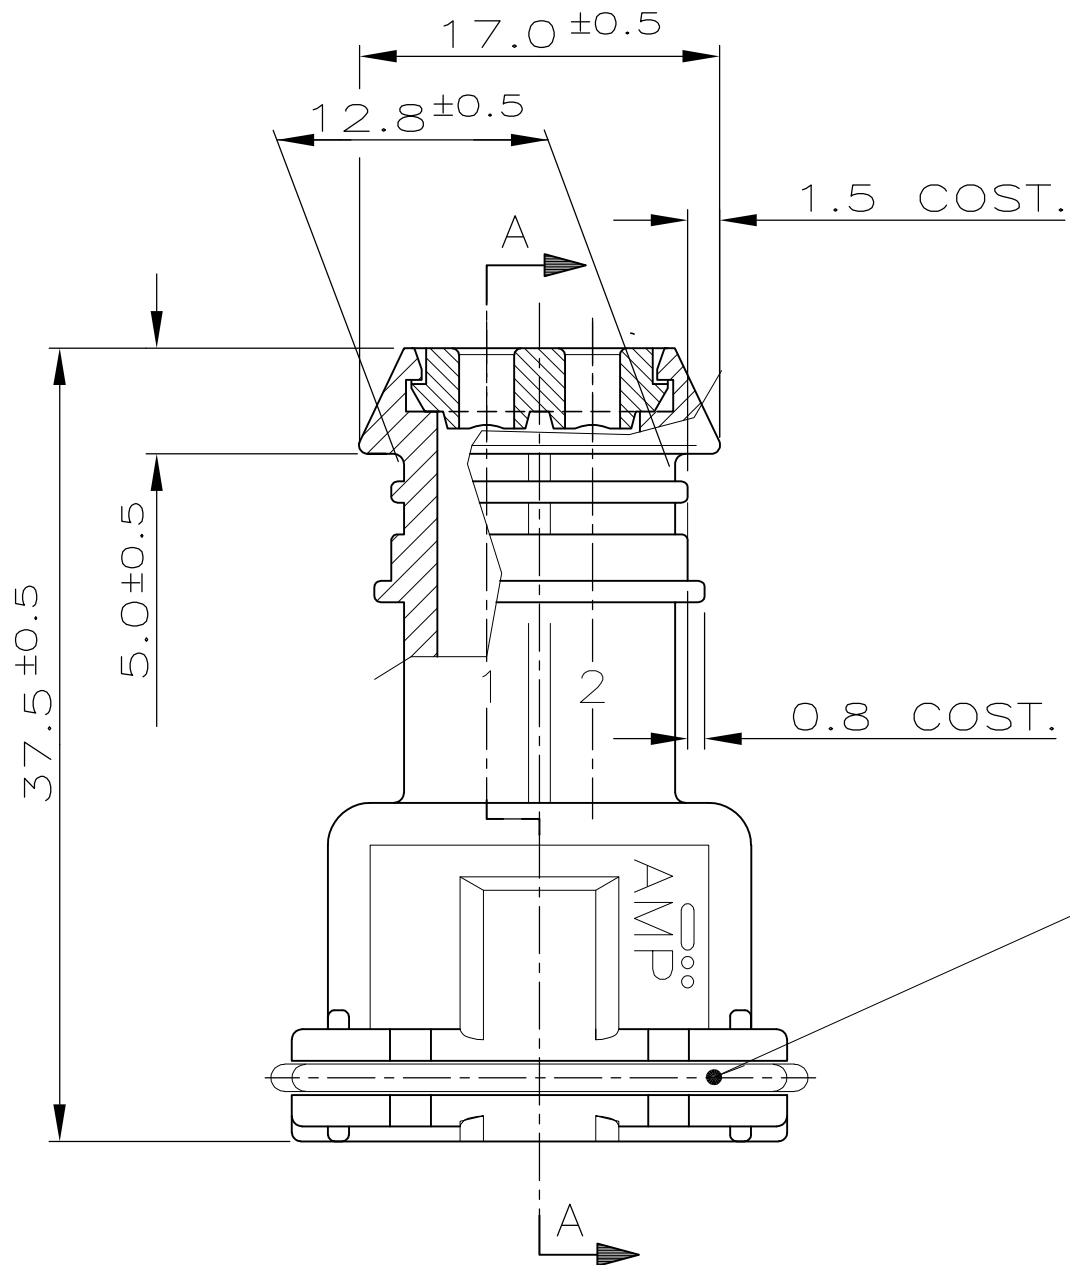

SEZIONE A-A
(SECTION A-A)

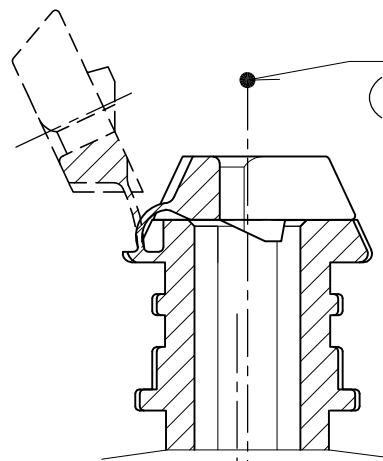

ASSE CAVITA'
(CAVITY CENTER LINE)

ASSE CONNETTORE
(CONNECTOR CENTER LINE)

CAVITA' ADATTA PER TERMINALI JUNIOR POWER TIMER:

CONTATTO P/N 929939-1 O -3 CON GOMMINO P/N 828904-1,
CAVO ISOLANTE RIDOTTO Ø1.5-2.1mm; SEZIONE 0.5-1.0mm²


CONTATTO P/N 929937-1 O -3 CON GOMMINO P/N 828905-1,
CAVO ISOLANTE RIDOTTO Ø2.2-3.0mm; SEZIONE 1.5-2.5mm²

CAVITY SUITABLE FOR JUNIOR POWER TIMER CONTACT:


CNT.P/N 929939-1 OR -3 PLUS WIRE SEAL P/N 828904-1
REDUCED INS. CABLE Ø1.5-2.1mm; WIRE RANGE 0.5-1.0mm²

CNT.P/N 929937-1 OR -3 PLUS WIRE SEAL P/N 828905-1
REDUCED INS. CABLE Ø2.2-3.0mm; WIRE RANGE 1.5-2.5mm²


- 1 DIFFERISCE DAL ..-1 ESCLUSIVAMENTE PER IL PACKAGING
(DIFFERS FROM ..-1 ONLY FOR PACKAGING DETAILS)
2) PER DIMENSIONI CONTROPARTE VEDERE FOGLIO 2 .
(FOR COUNTERPART DIMENSIONS SEE SHEET 2).

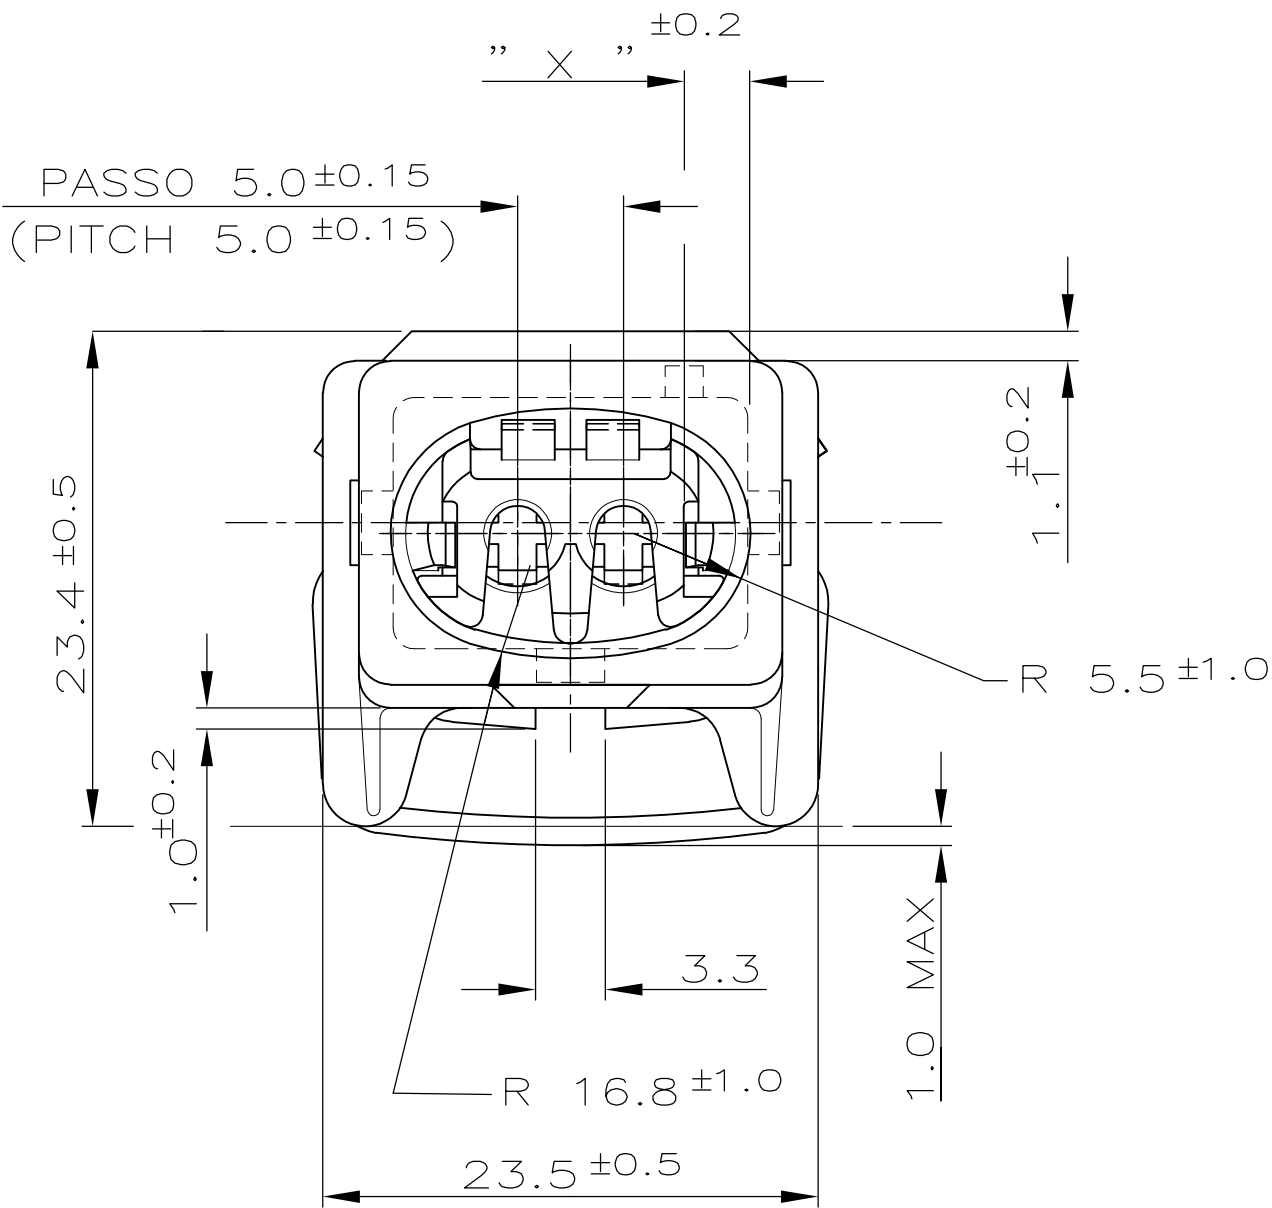

4.9	MARRONE(BROWN)	2-282682-1	1				
3.1	GIALLO(YELLOW)	282685-1					
12.1	BIANCO (WHITE)	282684-1	3	////	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)	
10.3	BLU (BLUE)	282683-1					
4.9	MARRONE(BROWN)	282682-1	2	NATURALE (NATURAL)	GOMMA SILICONICA (SILICONE RUBBER)	GUARNIZIONE (RUBBER GASKET)	
6.7	VERDE(GREEN)	282681-1					
8.5	GRIGIO(GREY)	282680-1	1	////	PA 6.6	BLOCCETTO (HOUSING)	
" X "	COLORE COLOR	NUMERO PART. N°	N° (ITEM)	FINITURA / FINISH / COLORE COLOUR	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)	

THIS DRAWING IS A CONTROLLED DOCUMENT. QUESTO DISEGNO E' UN DOCUMENTO CONTROLLATO.		DWN / DIS. —	 TE Connectivity				
DIMENSIONS: DIMENSIONI: mm		CHK / CONT. —					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: TOLLERANZE SE NON DIVERSAMENTE SPECIFICATO 0 PLC / DEC: ± — 1 PLC / DEC: ± 0.3 2 PLC / DEC: ± — 3 PLC / DEC: ± — 4 PLC / DEC: ± — ANGLES / ANGOLI ± 2°	APVD / APP. —	NAME NOME 2 WAY J.P.T. SPLASH PROOF CONN. ASS'Y WITH SECONDARY LOCK				
		PRODUCT SPEC SPEC DI PRODOTTO —					
		APPLICATION SPEC SPEC DI APPLICAZIONE —	SIZE	CAGE CODE	DRAWING NO NUMERO (MASTER)	RESTRICTED TO	
		MATERIAL MATERIALE —	FINISH FINITURA —	WEIGHT PESO —	A2	00779	G=282680
CUSTOMER DRAWING		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO.			SCALE SCALA —	SHEET FOGLIO 1 85 2	REV D

METRIC	DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0mm (REDUCED INS.CABLE)	RANGO FILO (WIRE RANGE) 0.5-2.5 mm ²
--------	---	---

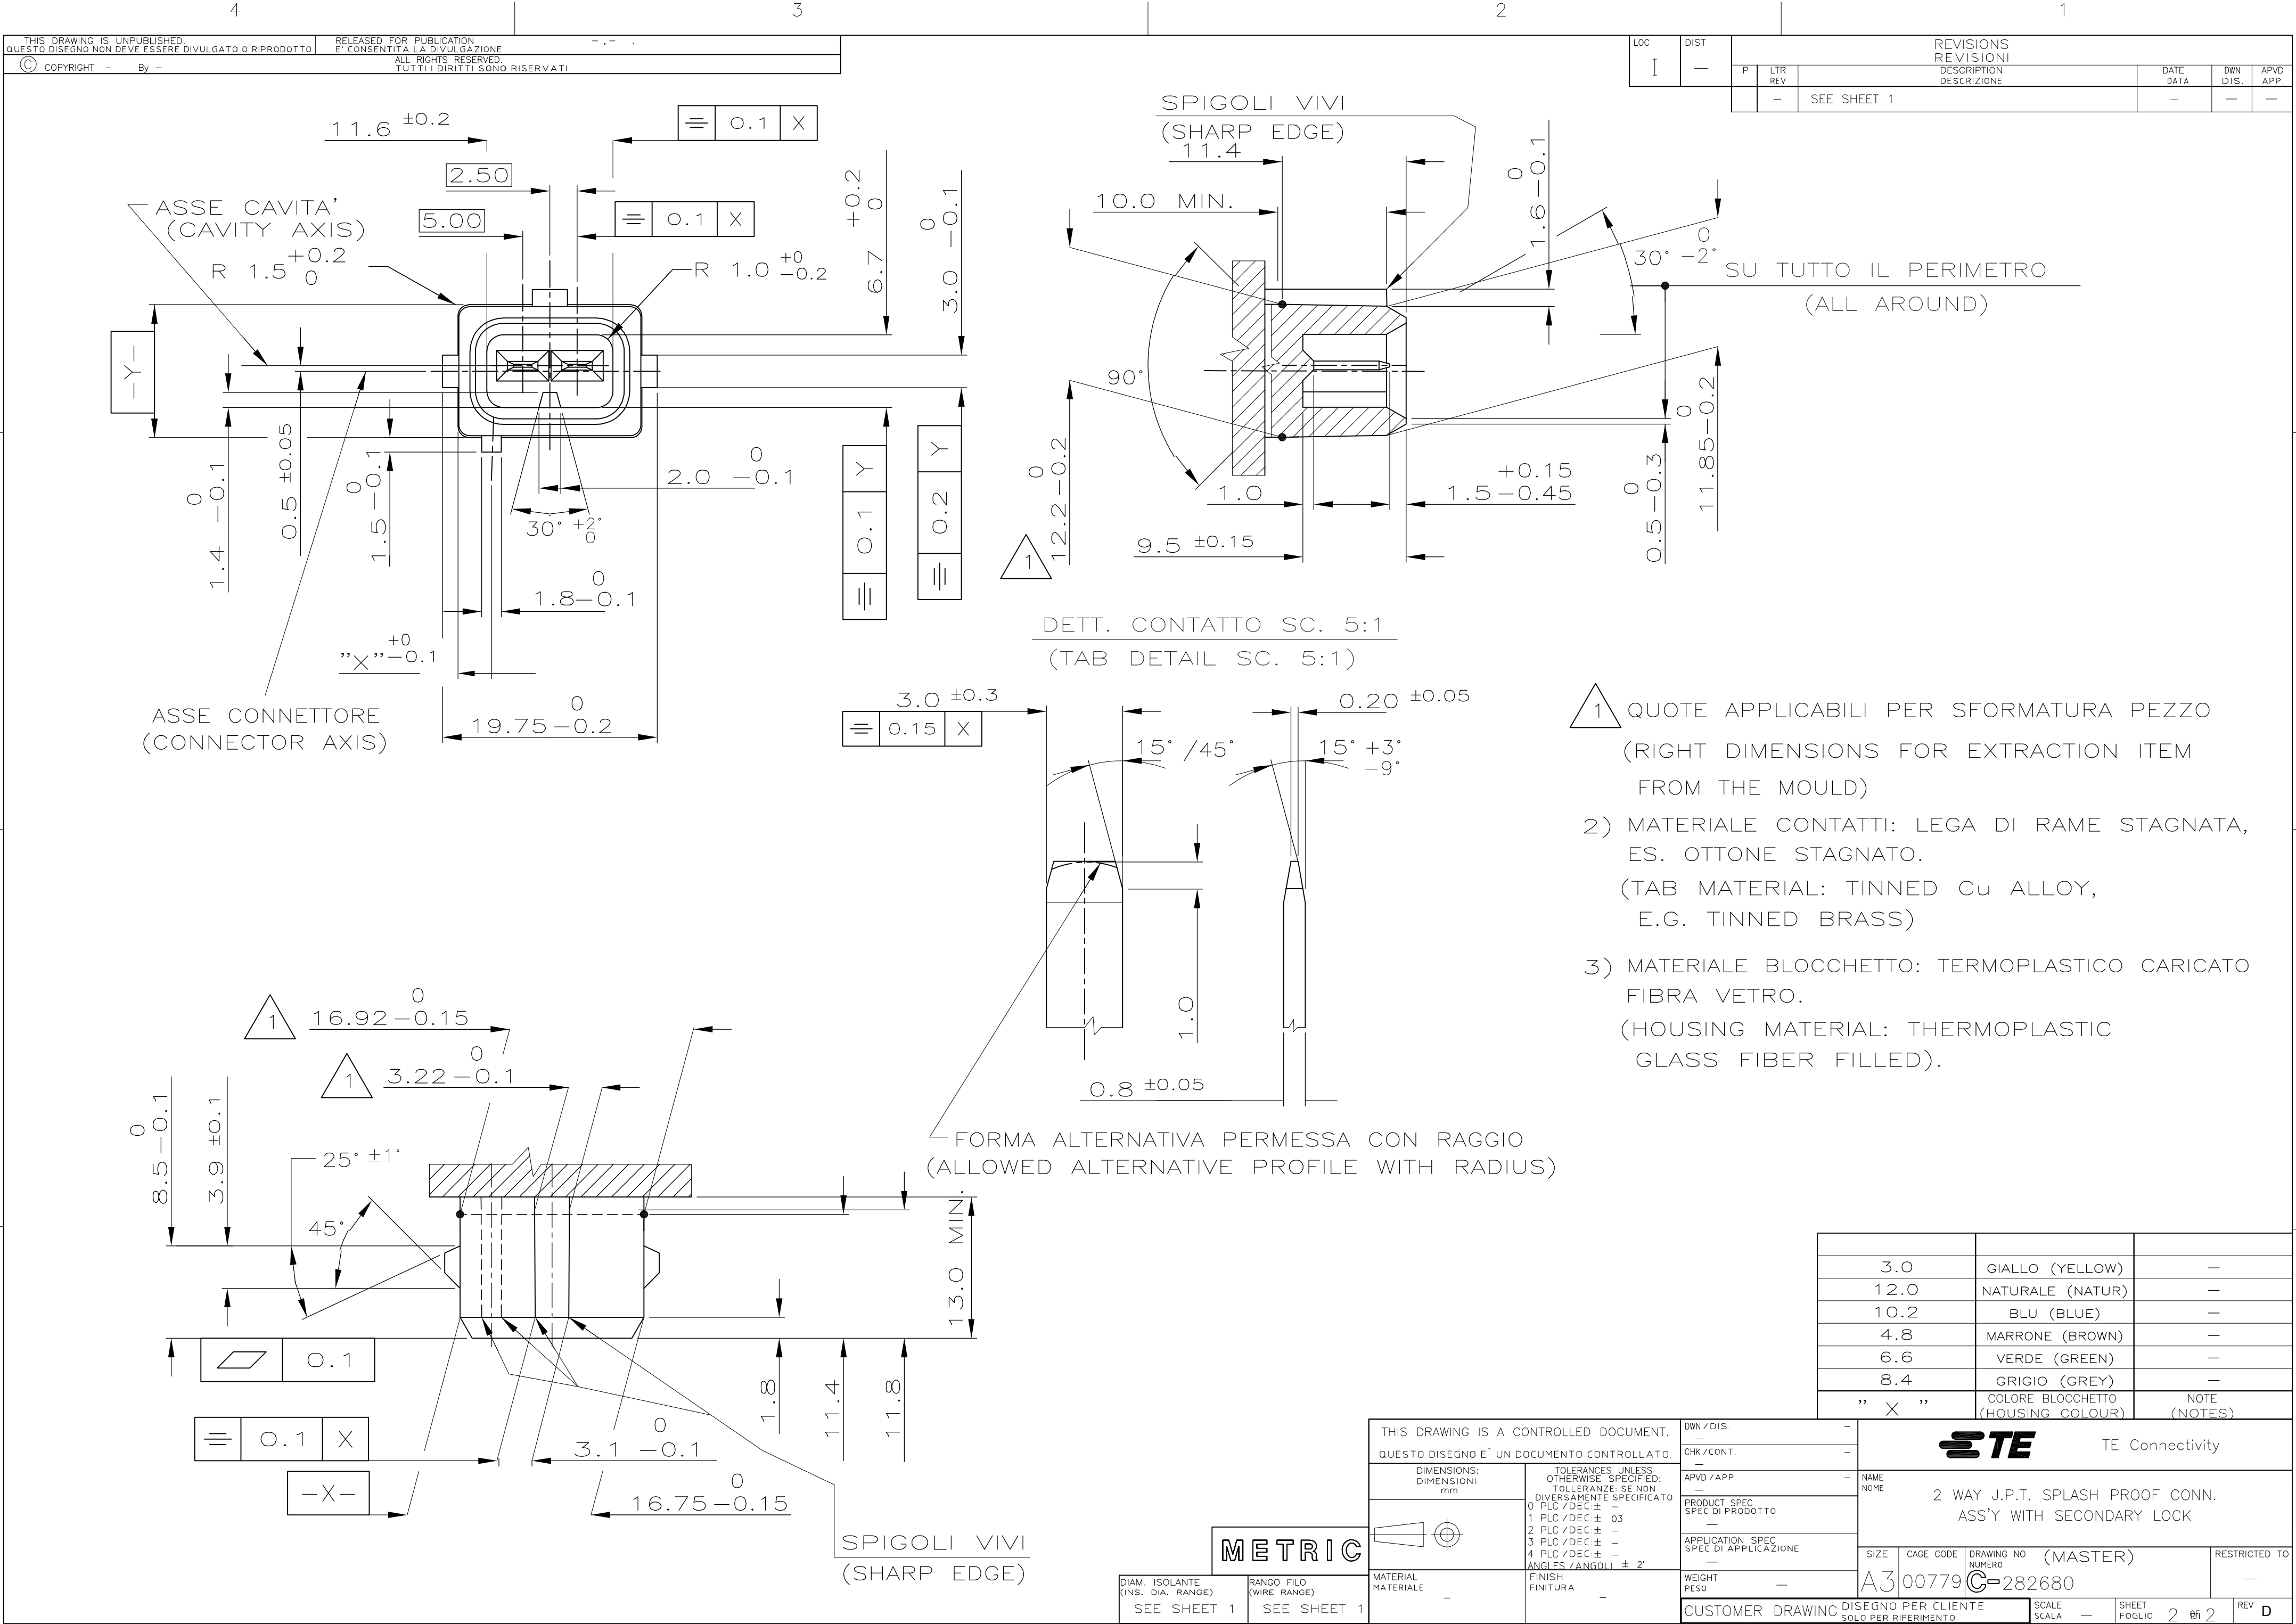

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282684-1](#)