
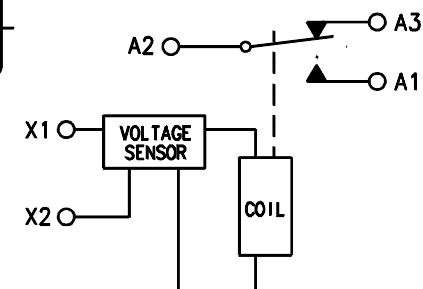
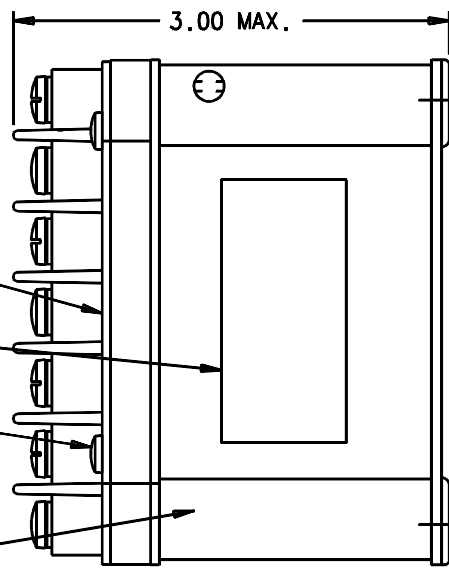


E-308P

REV. E

REVISIONS			RELEASED	
REV	ECN No.	DESCRIPTION	DATE	APPROVED
A		DATA & WIRING DIAG. UPDATED	73/12/05	RS
B		P/C CORRECTED	74/09/25	RS
C	10617	ADDED NOTE, VENT (LOCATION OPTIONAL)	77/11/29	RS
E	06-006913	REDRAWN, ITEM 3 WAS 20502-001	06/03/06	CB

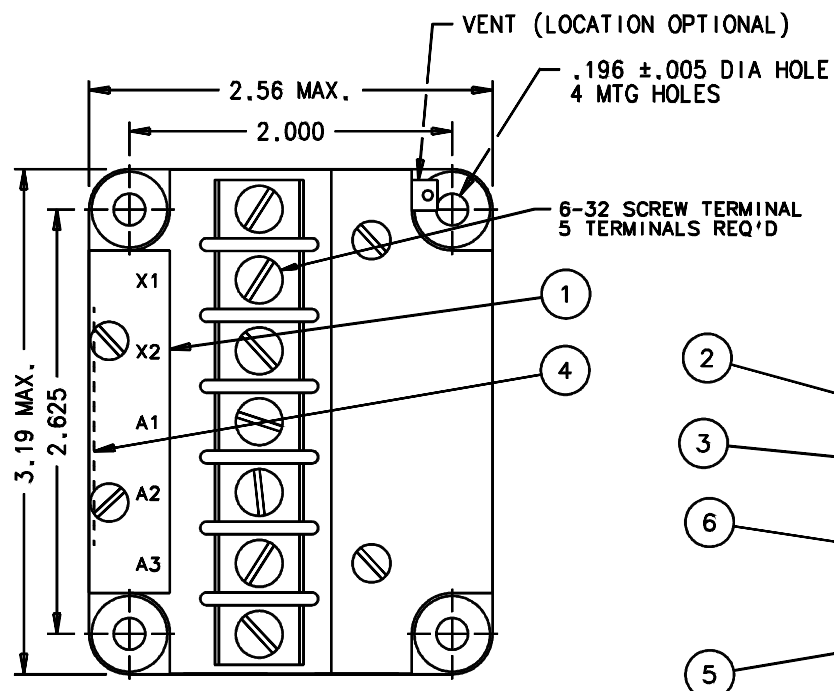

CONSTRUCTION

DUST PROOF GASKET SEALED

OPERATING VOLTAGE

CONTINUOUS DUTY 120 V 400 HZ
 PICKUP VOLTAGE 97±3 VAC
 DROPOUT VOLTAGE 85±3 VAC T.D. 40±10 MS ON DROP-OUT
 CONTACT RATING 3 AMP RESISTANCE AT 28 VDC
 2 AMP INDUCTIVE AT 28 VDC
 1 AMP LAMP

ENVIRONMENTAL

TEMP OPERATING -55°C TO +71°C
 VIBRATION .060 DA 5 TO 55 HZ
 10g CONTANT
 ACCELERATION 55 - 2,000 HZ

MAX. WEIGHT

10 OZ.

W/D No. 32667

6	4	51200-020	SCREW - 4 X 1/4 PAN HD			S.S. STEEL
5	1	32684-010	PRIMARY ASSEMBLY			
4	1	32490-001	PLATE - WIRING DIAGRAM			
3	1	20502-003	PLATE-NAME			
2	1	16762-001	PLATE-BASE COVER			
1	1	15662-013	PLATE-BASE COVER			
FIND NO	QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	FSOM NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON			TYCO Electronics A Hartman Division • 175 N. DIAMOND STREET • MANSFIELD, OHIO 44802			
2 PL DEC. 3 PL DEC. ANGLES			DR BY RES 73/08/30	UNDER VOLTAGE-SENSOR 093		
±.06 ±.010 ± 1°			CHK BY RS 73/08/30			
MATERIAL			ENGR DH 73/08/30			
			MFG MB 06/03/06			
			SIZE CODE IDENT	DWG NO. E-308P		
			C 74063	REF TYCO P/N 1616126-5		
			SCALE NONE / SHEET			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[E308P](#)