

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-----------------------|--------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| - | - | | C | REV PER ECO 15-005320 | 4-8-15 | CT | EO |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

D

D

C


C

B




B

A

A

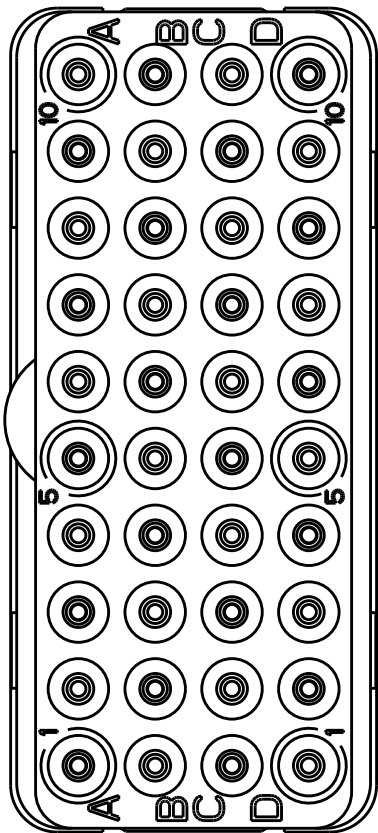

MATING FACE

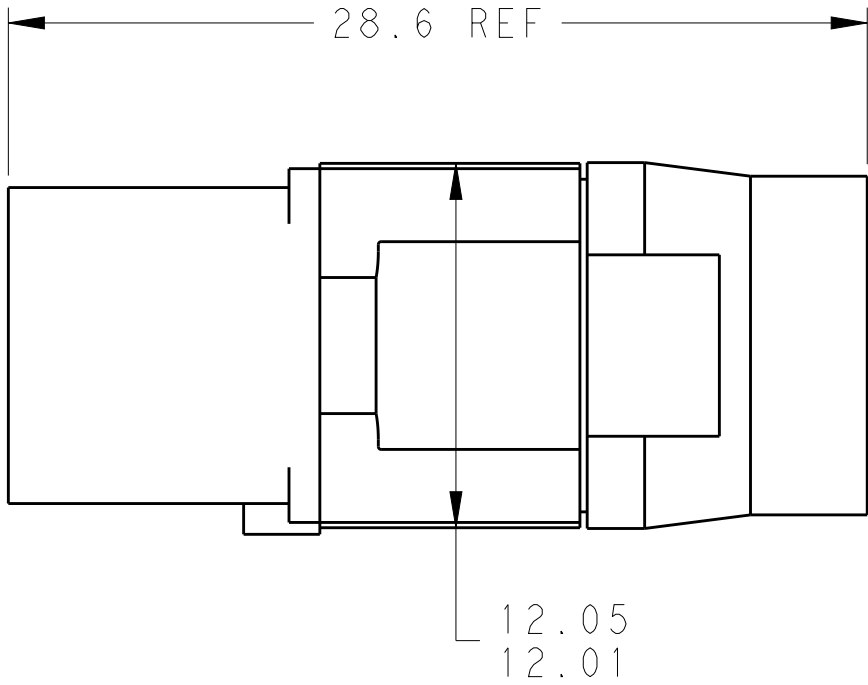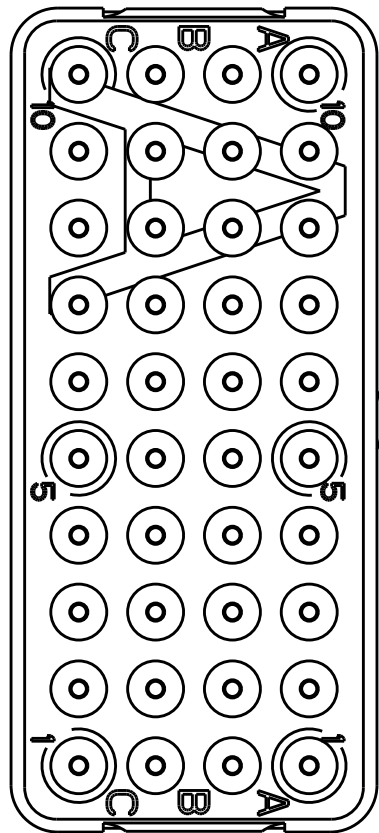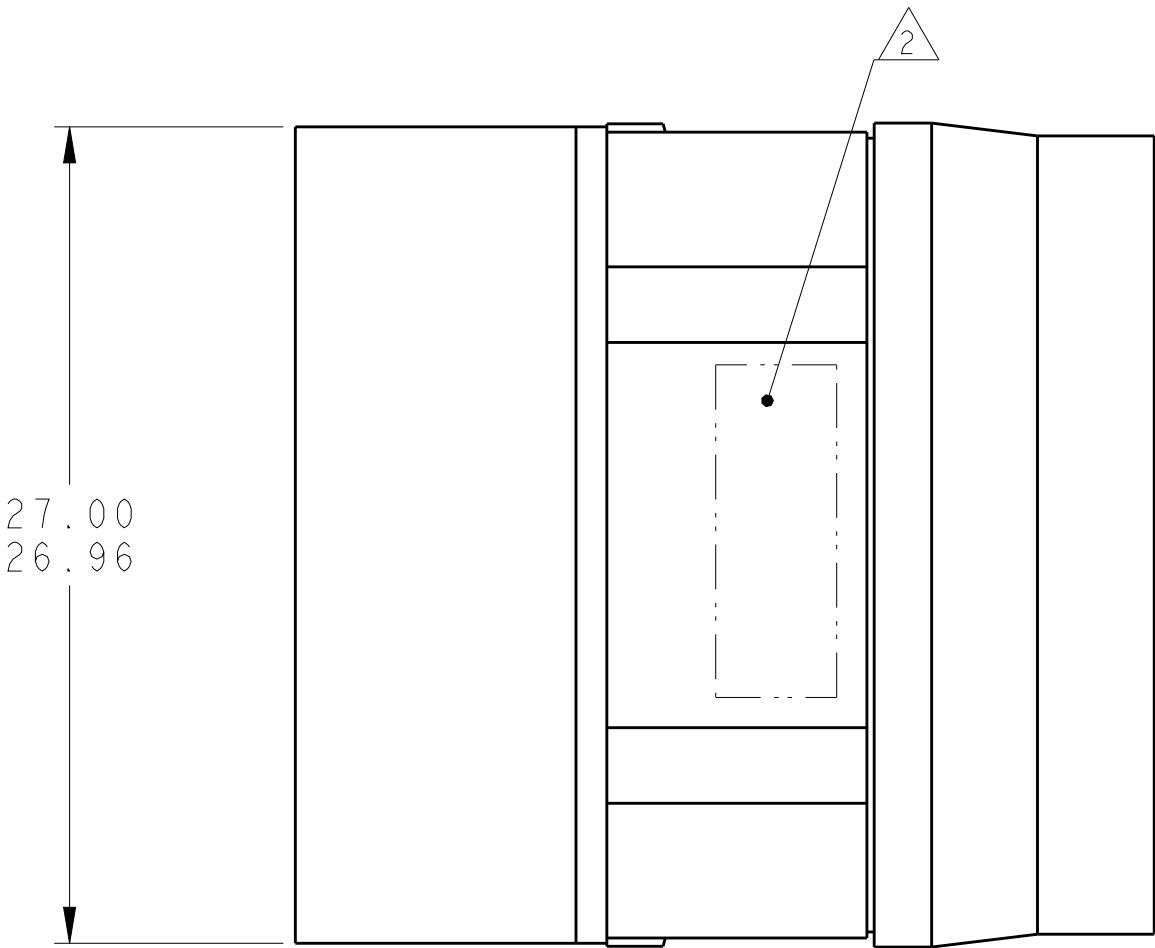

1 FRONT & REAR INSULATORS: HIGH-TEMP THERMOPLASTIC OR THERMOSET EPOXY PER ASTM D5948. CONTACT RETENTION CLIPS: STAINLESS STEEL PER AISI 302 OR COPPER ALLOY PER ASTM B194, REAR GROMMET: FLUOROSILICONE ELASTOMER PER MIL-R-25988 B EXCEPT 4.6.6.1.

2 PART TO MARKED WITH TE IDENTIFICATION, TE PART NO. AND DATE CODE: YEAR & WEEK (YY WW) IN APPROXIMATE AREA SHOWN.

3. THIS INSERT CONTAINS: 40 CAVITIES FOR SIZE 22 SOCKET CONTACTS

4. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALl SA.

| | | |
|---------------|----------------------|-------------|
| NON-ENV | GPRBN40SA | 1738189-2 |
| ENVIRONMENTAL | GPRBE40SA | 1738189-1 |
| REMARKS | DESCRIPTIVE PART NO. | PART NUMBER |

| | | | | | | | |
|--|--|---|-------------------------------|--|-----------|------------|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN C.C. THOMAS CHK K. HOGAN APVD K. HOGAN | 10-4-10 10-4-10 10-4-10 | TE Connectivity | | | |
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | NAME INSERT ASSEMBLY, SOCKET, ARRANGEMENT 40, KEY A, GPRB | | | |
| MATERIAL | | PRODUCT SPEC | | SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| 1 | | APPLICATION SPEC | | A2 | 00779 | C-1738189 | - |
| | | WEIGHT | | SCALE 4:1 SHEET 1 OF 1 REV C | | | |
| | | Customer Drawing | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1738189-2](#)