


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
FT	0		I	PRELIMINARY	11OCT2007	SW CR

D




C

B

A

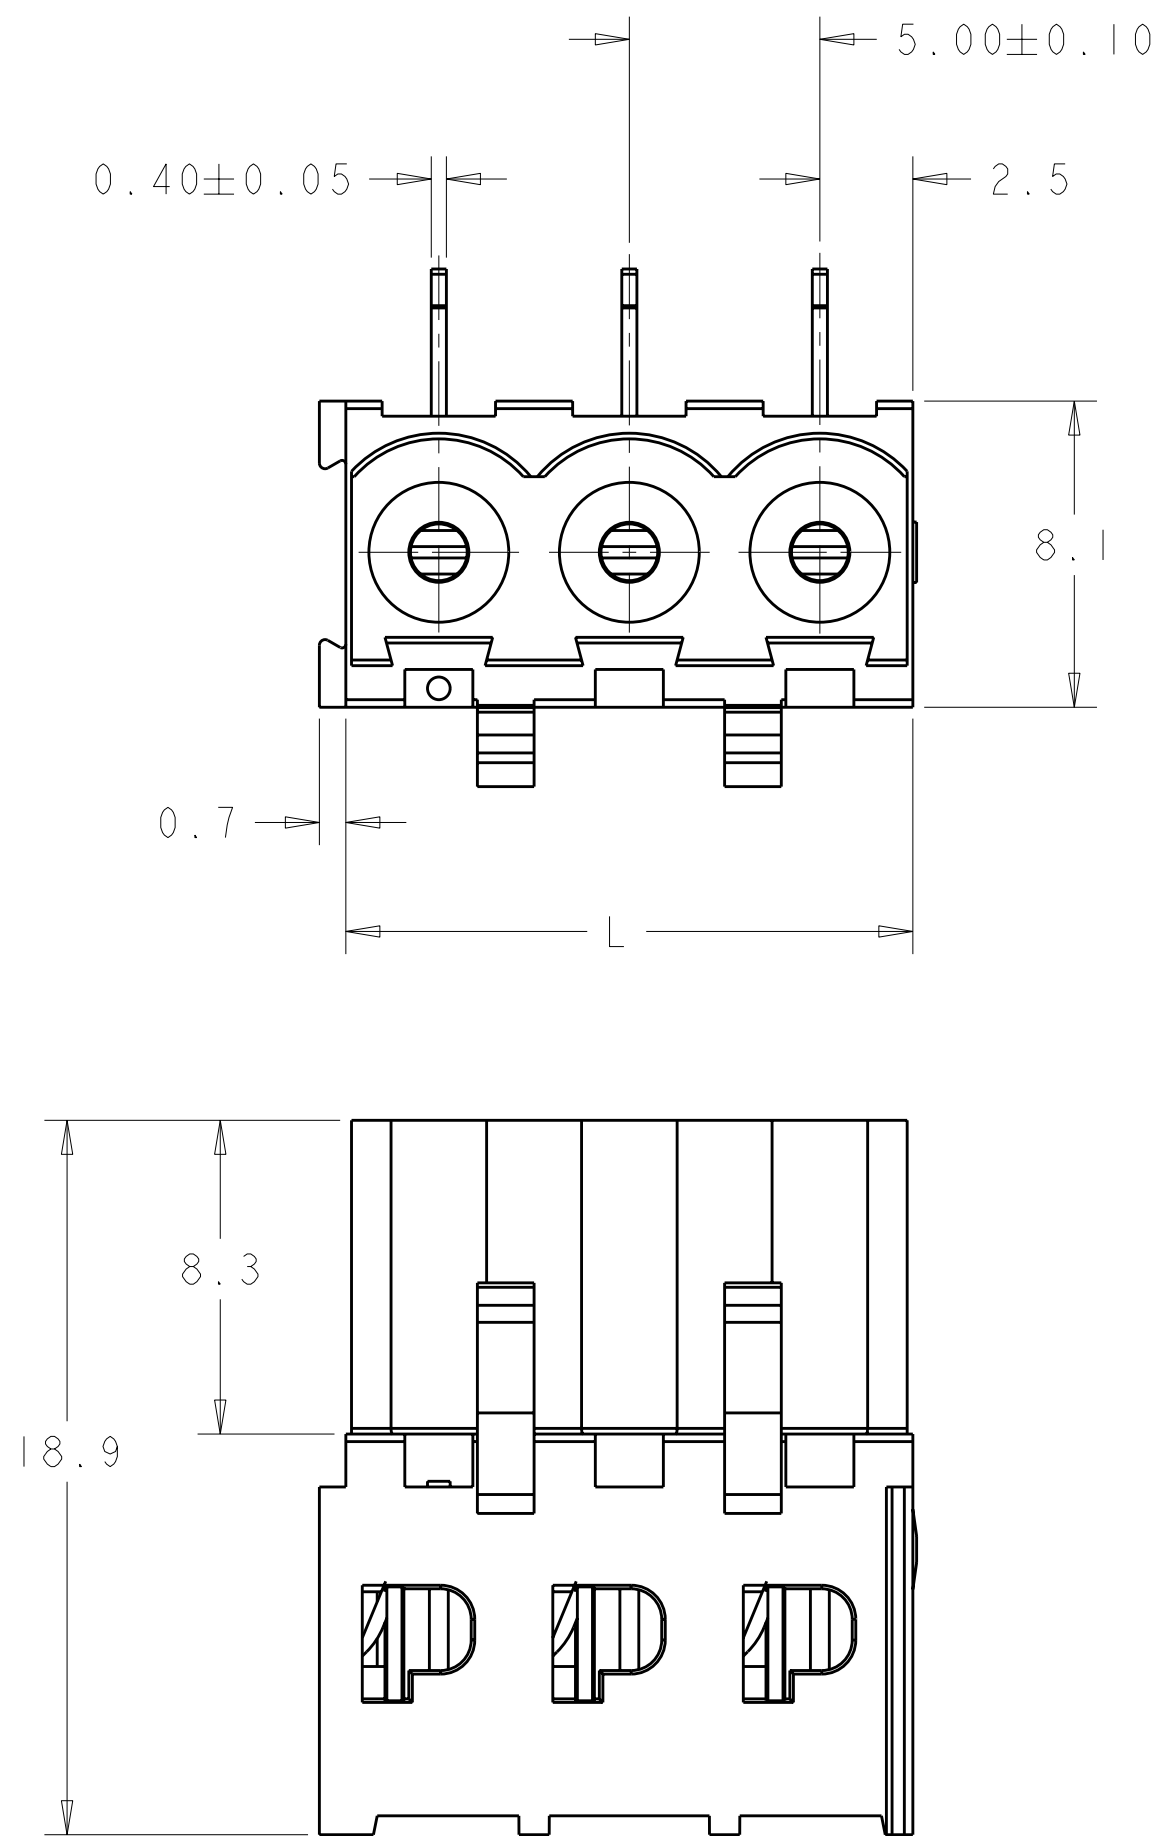

1. MATERIAL AND FINISH  
HOUSING: PA 6-6, UL 94V-0 RATED, COLOR: GREEN  
CONTACT: COPPER ALLOY, TIN PLATED.
2. END-TO-END STACKABLE WITH INTERLOCK WITHOUT LOSS OF CENTERLINE SPACING.
3. MAXIMUM OF 12 POSITIONS ALLOWED FOR END-TO-END STACKING
4. SUITABLE FOR 1.6 - 2.4mm PC BOARD THICKNESS.
5. CURRENT RATING: 300V, 15A
6. OPERATING TEMPERATURE: -40°C TO 110°C

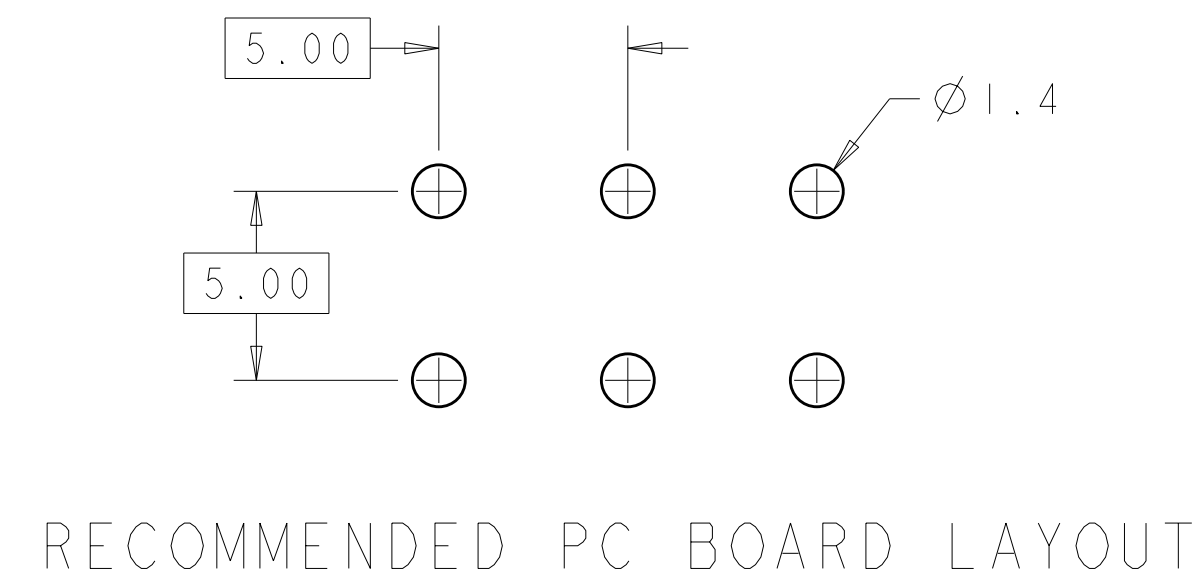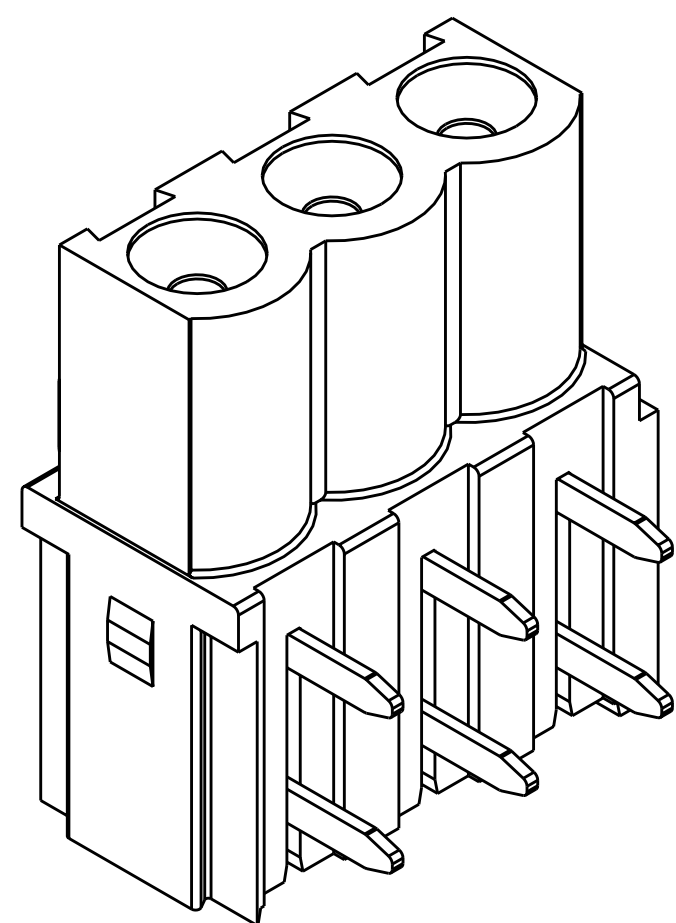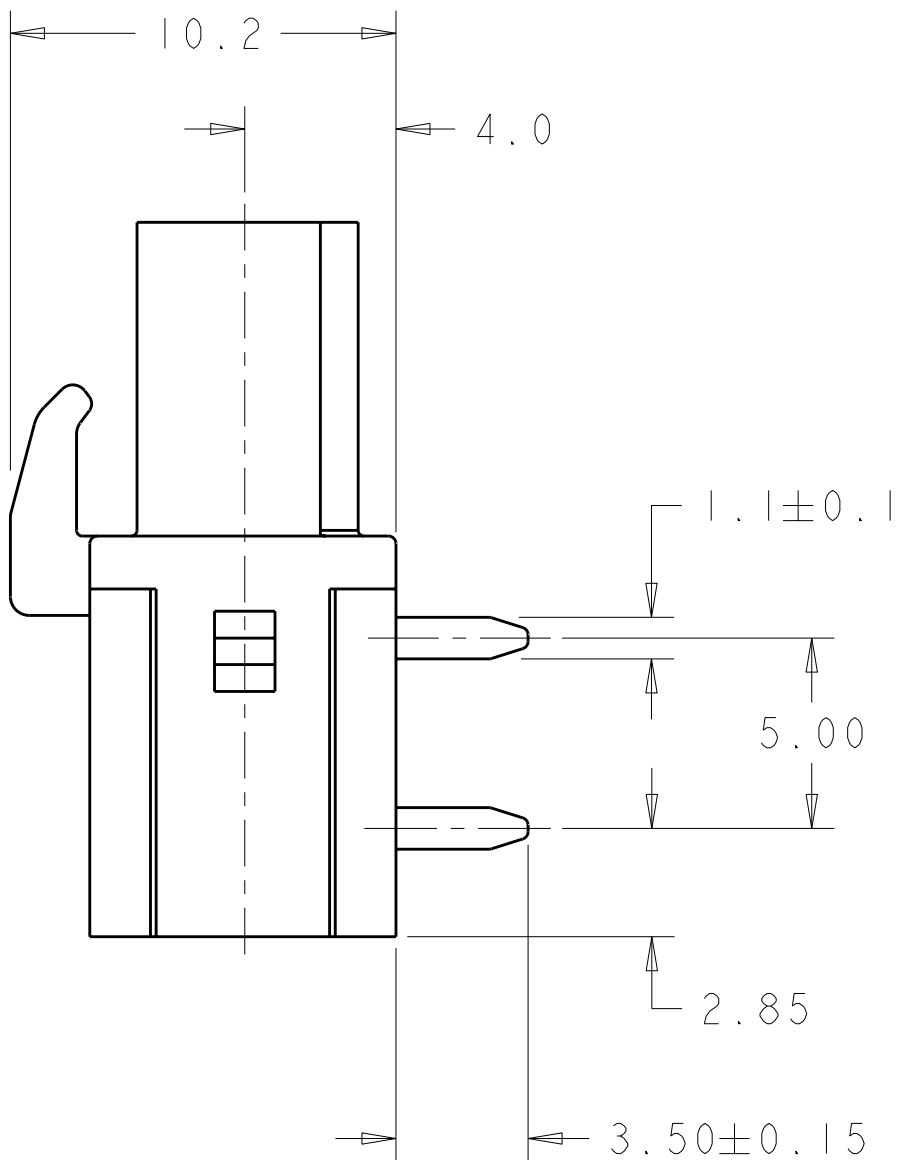

15.0	3	1986278-3
10.0	2	1986278-2
L	NO OF POSN	PART NUMBER

THIS PRINT IS  
**PRELIMINARY**  
PRIOR TO CUSTOMER ORDER  
CONTACT PRODUCT ENGINEERING  
BEFORE USING THIS PRINT

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. WELDON CHK C. RICHARD APVD C. RICHARD	11OCT2007 11OCT2007 11OCT2007	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG ASSEMBLY, TERMINAL BLOCK, RIGHT ANGLE, BOARD MOUNT, 5.00mm PITCH	
MATERIAL		FINISH		SIZE A200779	RESTRICTED TO -
-		-		DRAWING NO C-1986278	SCALE 5:1
-		-		APPLICATION SPEC -	SHEET 1
-		-		WEIGHT -	OF 1
-		-		CUSTOMER DRAWING	REV 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1986278-8](#)