


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-14-011385	27JUL2014	DM	DM
	A2	REVISED PER ECO-16-005986	22FEB2016	VNB	DM
	A3	REVISED PER ECO-16-012882	31AUG2016	JA	DM

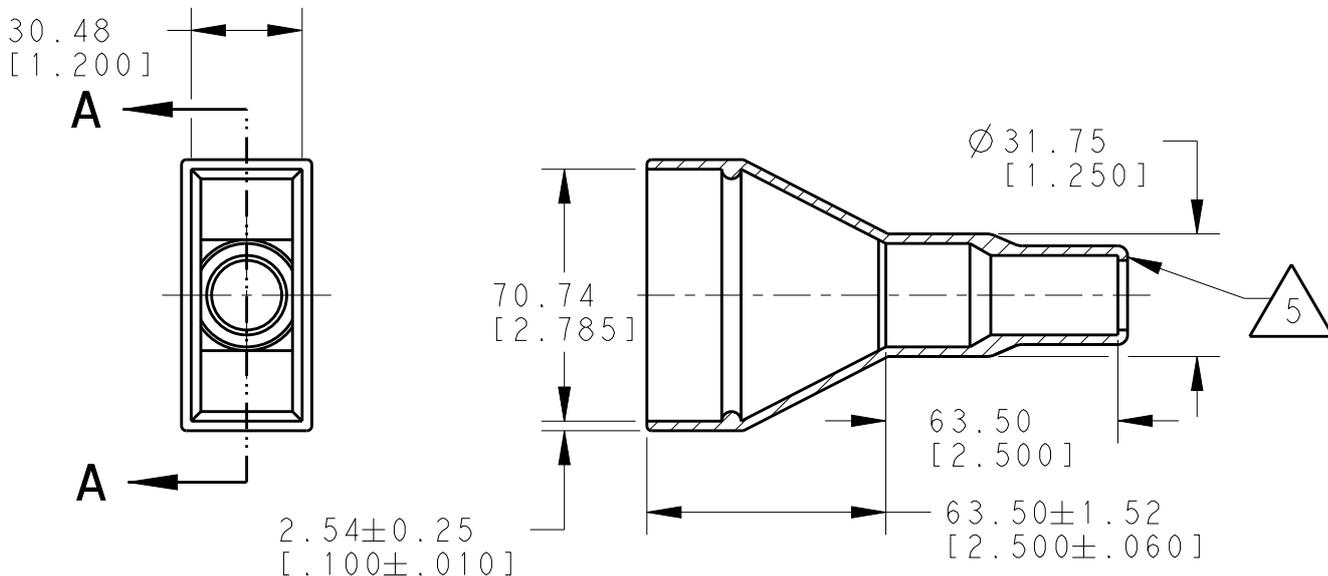

SECTION A-A


5. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.

4. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION

3. DELETED

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON
 DRC12-40PX(E)-XXXX RECEPTACLE
 DRC14-40PX(E)-XXXX RECEPTACLE
 DRC16-40SX(E)-XXXX PLUG
 WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION



NOTES:

TE INTERNAL NUMBER	DEUTSCH PART NUMBER
DRC40-BT	DRC40-BT

DIMENSIONS: mm [INCH]	DWN D. MEYER	01JUL2014	MATERIAL	PVC	FINISH	BLACK
	CHK D.HASIBUAN	01JUL2014	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. MEYER	01JUL2014				
0 PLC ±-	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ±-			A 4	44AFU8	©=DRC40-BT	-
2 PLC ±0.63 [.025]	APPLICATION SPEC		CUSTOMER DRAWING			
3 PLC ±-			WEIGHT	52g		
4 PLC ±-			SCALE	1:2		SHEET 1 OF 1
ANGLES ±5°						REV A3

2016

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY - TE CONNECTIVITY

© COPYRIGHT 2016

THIS DRAWING IS UNPUBLISHED.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DRC40-BT](#)