

High Frequency Ceramic Solutions

1810 MHz Low Pass Filter

P/N 1810LP07A200

Detail Specification: 10/27/10

Page 1 of 2

General Specifications

Part Number	1810LP07A200
Frequency (MHz)	1710 - 1910
Insertion Loss	0.5 dB max.
Return Loss	10.9 dB min.
Attenuation (min.)	20 dB @ 2 x Fo
Attenuation (min.)	20 dB @ 3 x Fo

Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	10,000
Input Power	3 W max.


P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 1810LP07A200S
		T & R	Suffix = T	Eg. 1810LP07A200T
	Termination Style	100% Tin	Suffix = None	Eg. 1810LP07A200(S or T)
		Tin / Lead	Suffix = /Pb	Eg. 1810LP07A200(S or T)/Pb

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN

Mechanical Dimensions

	In	mm	
L	0.039 $\pm$ 0.002	1.00 $\pm$ 0.05	
W	0.020 $\pm$ 0.002	0.50 $\pm$ 0.05	
T	0.015 $\pm$ 0.002	0.38 $\pm$ 0.05	
a	0.006 $\pm$ 0.004	0.15 $\pm$ 0.10	
b	0.010 $\pm$ 0.004	0.25 $\pm$ 0.10	




Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

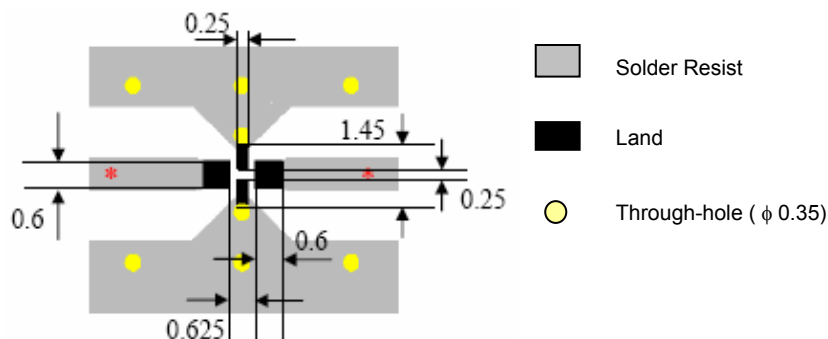

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2010 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


1810 MHz Low Pass Filter

P/N 1810LP07A200

Detail Specification: 10/27/10

Page 2 of 2

Typical Electrical Performance (T=25°C)

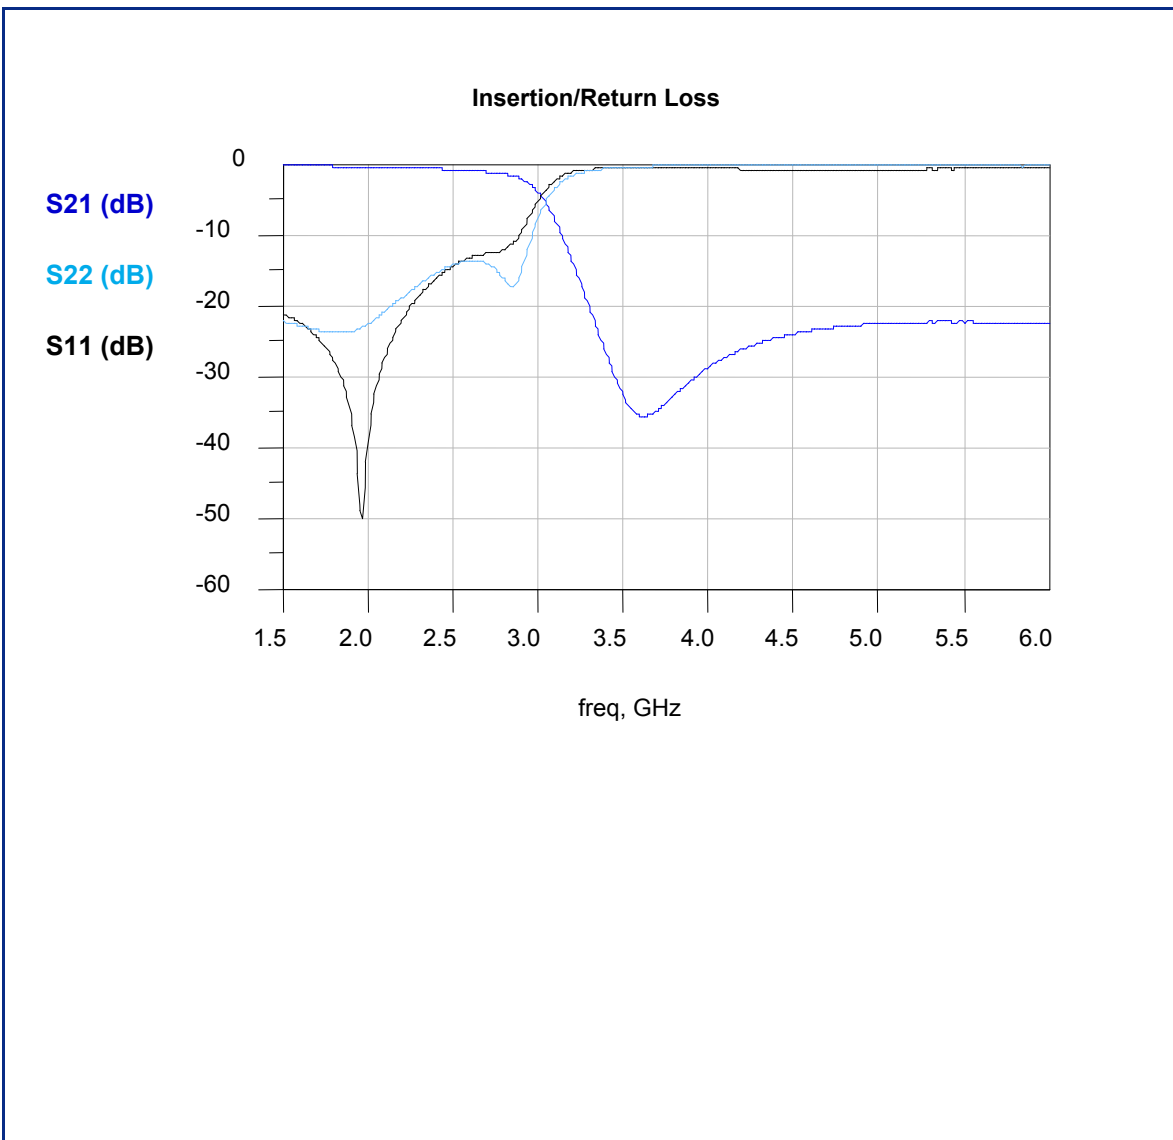

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[1810LP07A200T](#)