

Customer Information Sheet

DRAWING No.: G125-XWXXXXXX94






IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

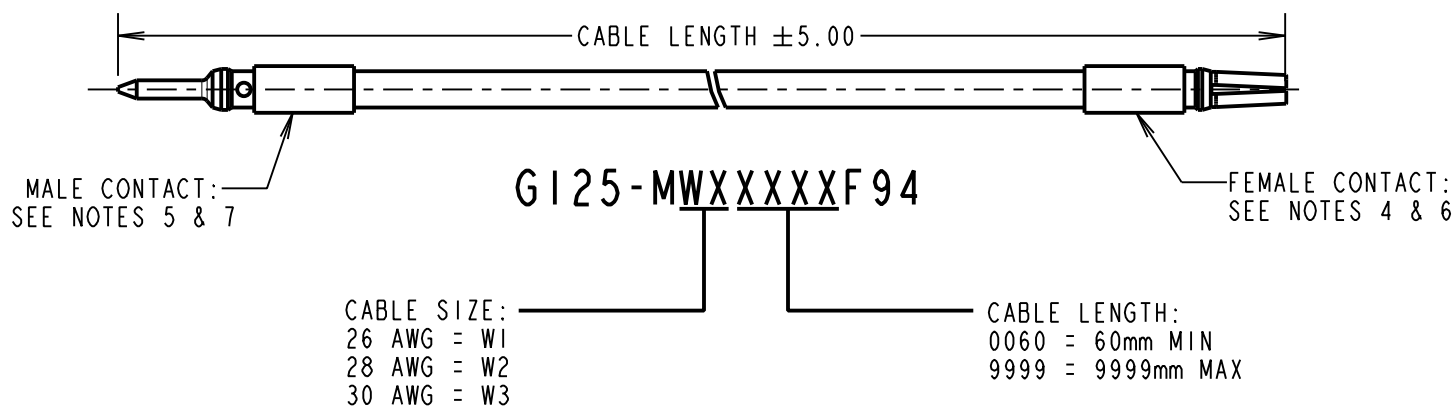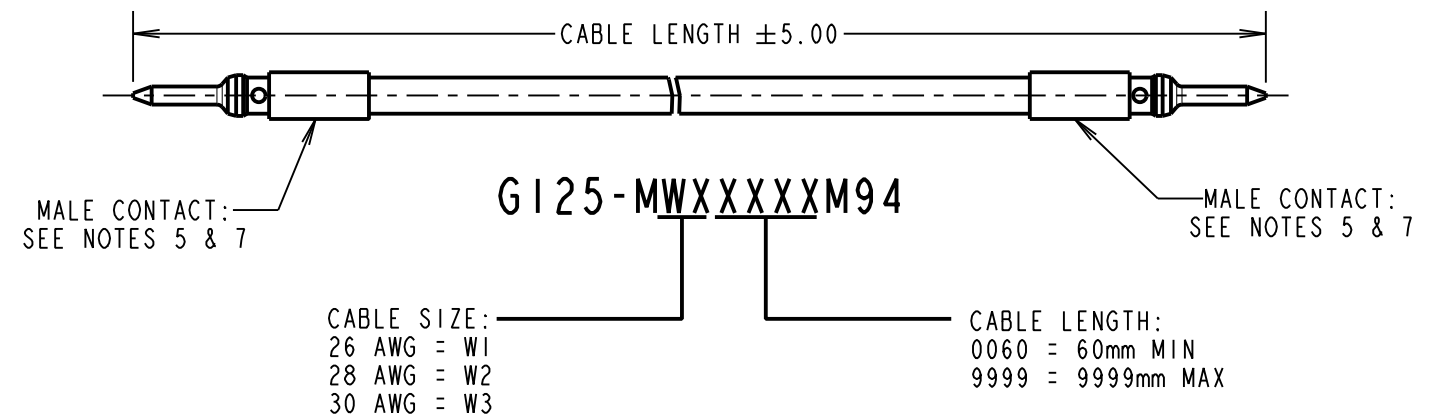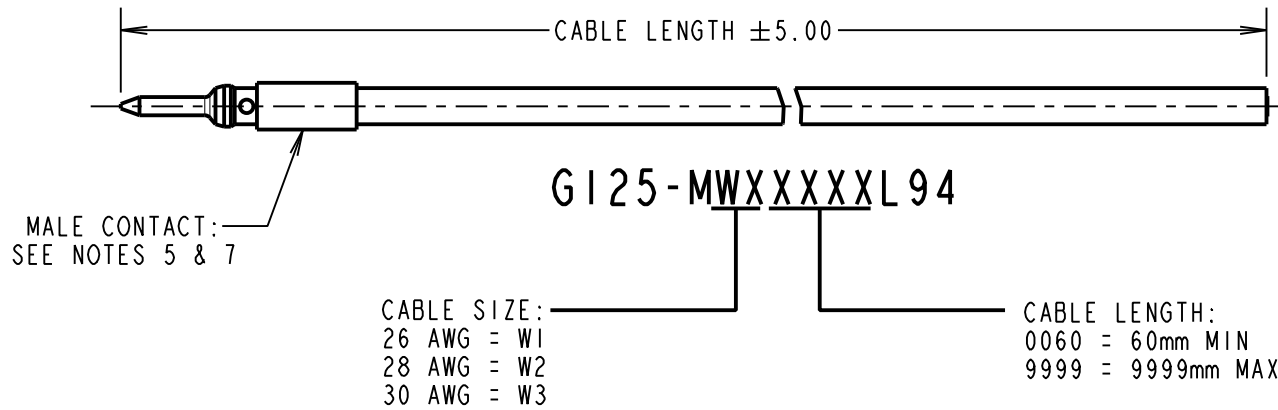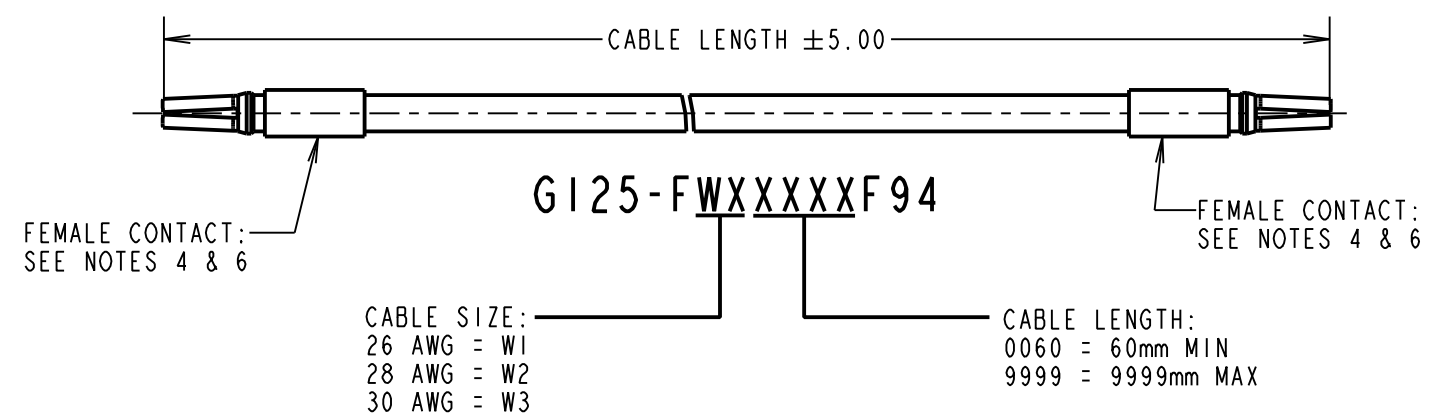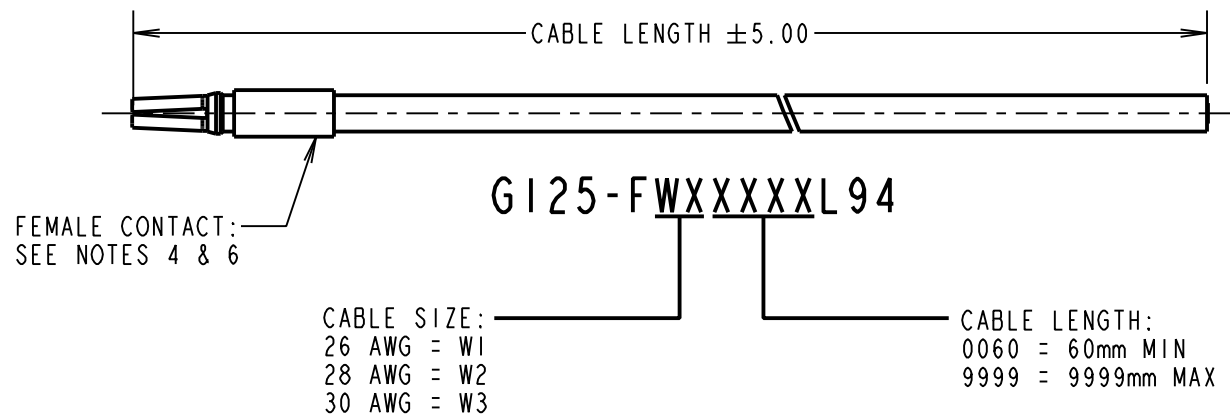

NOTES:

1. PACK SIZE: 10 ASSEMBLIES PER BAG. BAG SIZE 280mm x 170mm WITH RESEALABLE TOP. BAGS ARE PACKED IN SUITABLE SIZED BOX.
2. CONTACT INSERTION / WITHDRAWAL KIT = Z125-902.
3. SEE COMPONENT SPECIFICATION C049XX FOR WIRE TYPE (LATEST ISSUE).
4. G125-0010005 IS SUITABLE FOR WIRE GAUGE 26 AWG. MAXIMUM INSULATION DIAMETER \varnothing 0.80mm.
5. G125-1010005 IS SUITABLE FOR WIRE GAUGE 26 AWG. MAXIMUM INSULATION DIAMETER \varnothing 0.80mm.
6. G125-0020005 IS SUITABLE FOR WIRE GAUGE 28-30 AWG. MAXIMUM INSULATION DIAMETER \varnothing 0.72mm.
7. G125-1020005 IS SUITABLE FOR WIRE GAUGE 28-30 AWG. MAXIMUM INSULATION DIAMETER \varnothing 0.72mm.
8. RECOMMENDED POTTING COMPOUND = STYCAST 2651 MM BACK POTTING + CATALYST 9.

RTP	5	13.07.20	30098
NAME	ISS.	DATE	CN/CO
APPROVED: R.PORTLOCK			
CHECKED: M.RUDKIN			
DRAWN: S.BENNETT			
CUSTOMER REF.:			
ASSEMBLY DRG:			



HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = \pm 1mm
X.X = \pm 0.50mm
X.XX = \pm 0.20mm
X.XXX = \pm 0.01mm
ANGLES = \pm 5°
UNLESS STATED

MATERIAL:
SEE SHEET 3
FINISH: SEE SHEET 3
S/AREA: mm²

TITLE:
G125 SERIES
PRE-CRIMPED WIRE ASSEMBLIES
DRAWING NUMBER:
G125-XWXXXXXX94
SHT 2A OF 3