


X Kontaktanordnung contact arrangement

48 WW - Kontakte
48 WW - contacts


Position
position

32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2
----	----	----	----	----	----	----	----	----	----	----	----	---	---	---	---

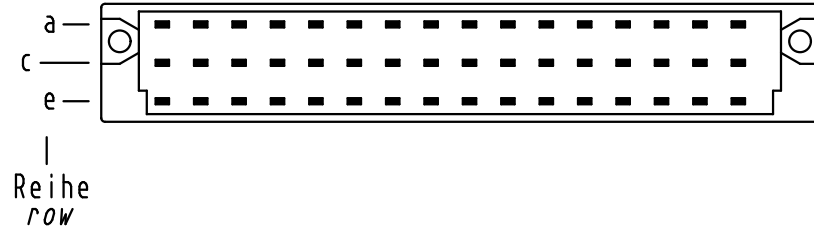




■ = Kontaktposition belegt
= position with contact

□ = Kontaktposition nicht belegt
= position without contact

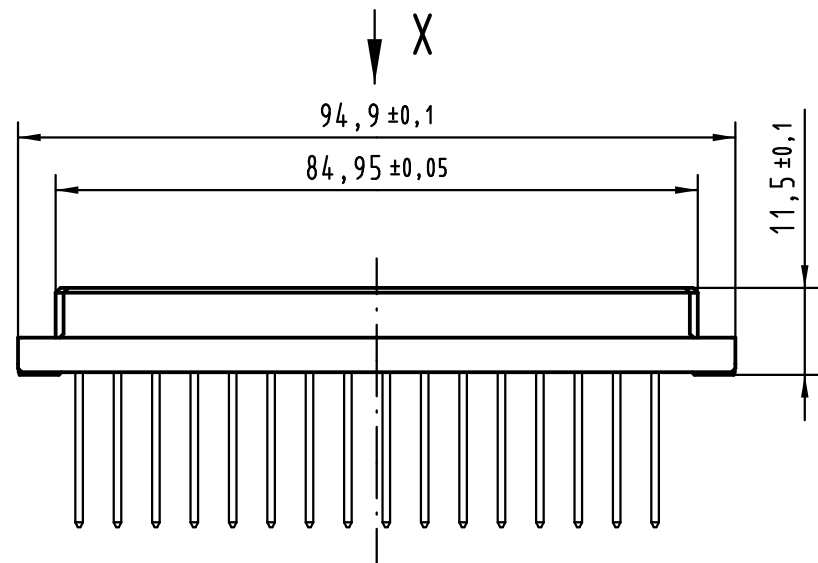

Z

Z (2:1)

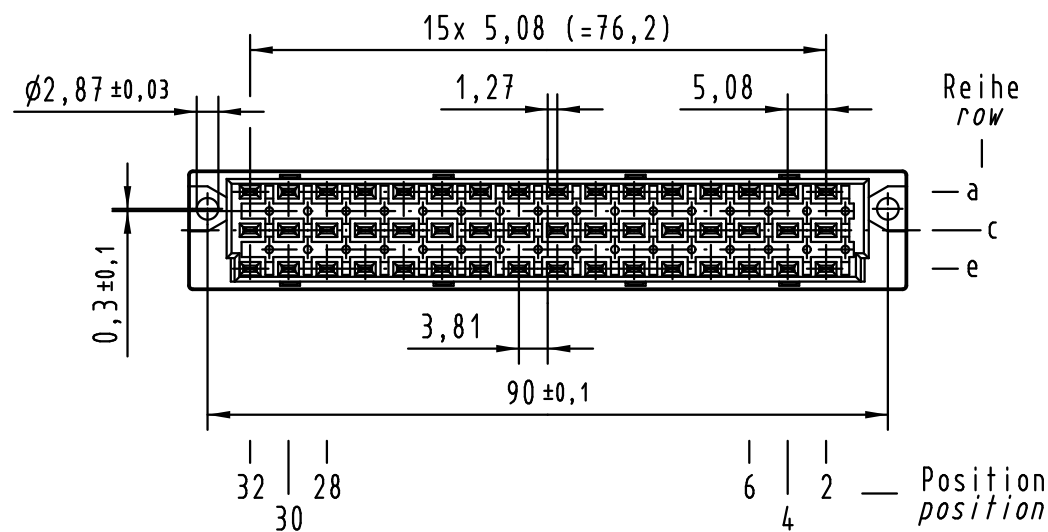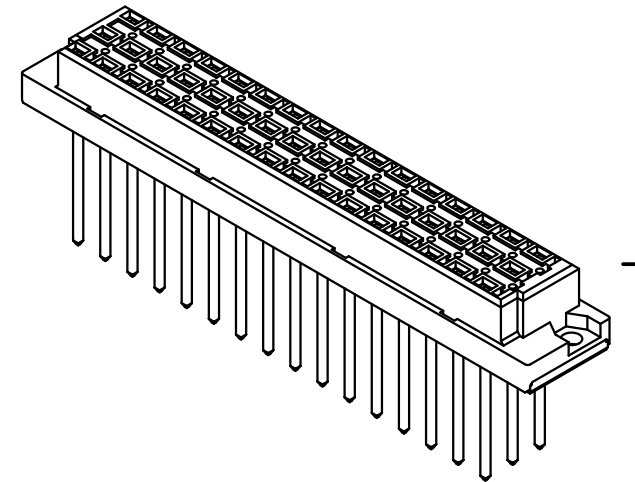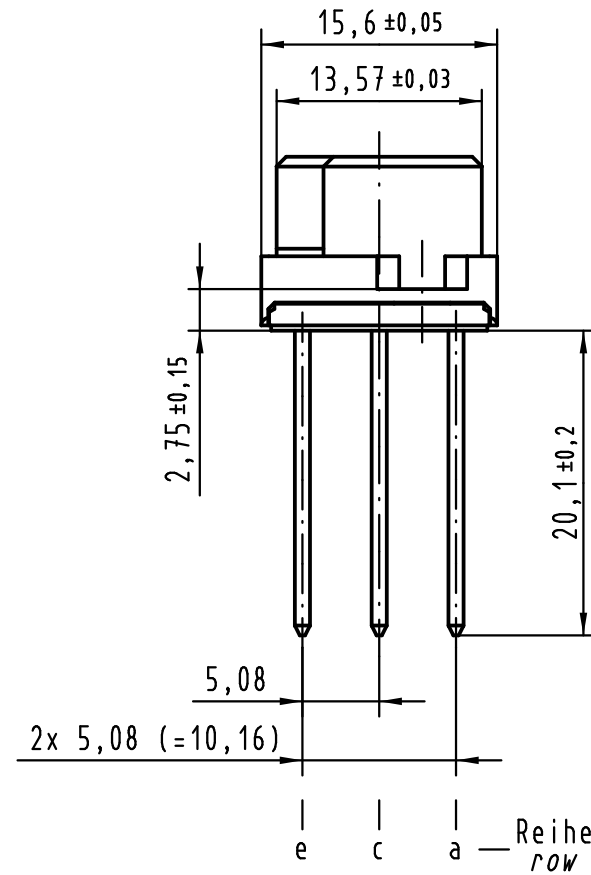

① weitere Informationen siehe: DS 09 04 210 00 01
further information see: DS 09 04 210 00 01

09 05 248 7821	3
09 05 248 6821	2
09 05 248 2821	1
Bestell-Nr. part-no.	Anforderungsstufe performance level ①

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maße/Free size tolerances IEC 60603-2	
				Dat.	Name	Maßstab/Scale 1:1	Bauform / type E Federleiste WW 20,0 48-polig female connector WW 20.0 48-pole
			Detail.	14.10.05	Re		
			Insp.	14.10.05	kfoe		
			Stand.				
36466	12.12.11	Hage.				HARTING D-32339 ESPELKAMP	TB 09 05 248 x821
33728	11.08.06	LehT					
32936							
Mod.	Dat.	Name				Sub.	Blatt/ page

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09052482821](#) [09052486821](#) [09052487821](#)