

(2.54 mm) .100"



IPT1 SERIES

SHROUDED POWER CONNECTOR SET

SPECIFICATIONS

For complete specifications see www.samtec.com?IPT1

Insulator Material:

Black LCP

Contact Material:

Phosphor Bronze

Plating:

Sn or Au over 50 μm (1.27 μm) Ni

Operating Temp Range:

-55 °C to +105 °C with Tin;

-55 °C to +125 °C with Gold

Insertion Depth:

(3.81 mm) .150" to

(6.48 mm) .255"

Wiping Distance:

(0.38 mm) .015"

Voltage Rating:

775 VAC/1095 VDC

Standard Creepage:

(2.49 mm) .098" (without -LC)

(1.28 mm) .050" (with -LC)

Standard Clearance:

(1.91 mm) .075" (without -LC)


(0.91 mm) .036" (with -LC)

RoHS Compliant: Yes


Mates with:

IPS1

CREEPAGE AND CLEARANCE



Selectively loading contacts achieves customer specific creepage and clearance requirements. Contact asp@samtec.com

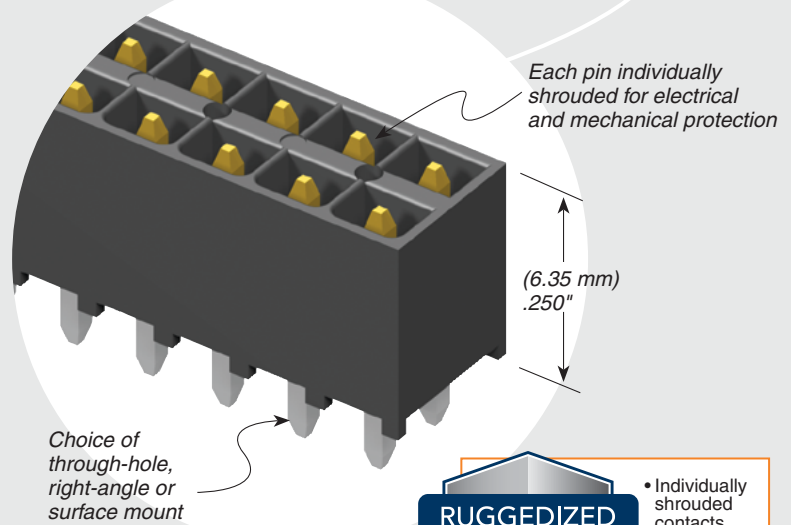

Each pin individually shrouded for electrical and mechanical protection

Choice of through-hole, right-angle or surface mount

RUGGEDIZED BY SAMTEC

- Individually shrouded contacts
- Locking clip option

IPT1/IPS1	
PINS	CURRENT RATING (PER CONTACT)
1	5.9 A
2	4.8 A
3	4.1 A
4	3.6 A
50	2.3 A

IPT1 - **1** NO. PINS PER ROW - **LEAD STYLE** - **PLATING OPTION** - **D** TAIL OPTION - **OTHER OPTION**

05, 10, 15, 20, 25 (Standard sizes)

Specify LEAD STYLE from chart

-L
= 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

-RA
= Right-angle

-VS
= Surface Mount

-A
= Alignment Pin (-VS only) (N/A with -LC)

-LC
= Locking Clip (Manual placement required) (-VS only) (N/A with -A)

-K
= (6.00 mm) .236" DIA Polyimide film Pick & Place Pad (-VS only)

-TR
= Tape & Reel Packaging (-VS only)

PROCESSING


Lead-Free Solderable: Yes
SMT Lead Coplanarity: (0.13 mm) .005" max (05-10)* (0.15 mm) .006" max (15-25)*
 *(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



APPLICATION

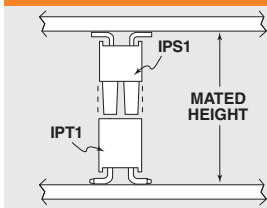

Note: Some sizes, styles and options are non-standard, non-returnable.

LEAD STYLE	MATED HEIGHT	A	B
-01	(11.05) .435	(6.35) .250	(2.16) .085
-01-VS	(13.59) .535	(6.35) .250	N/A
-02	(14.00) .551	(9.30) .366	(2.64) .104
-03	(16.00) .630	(11.30) .445	(2.16) .085
-04	(17.00) .669	(12.30) .484	(2.69) .106
-05	(19.00) .748	(14.30) .563	(2.46) .097
-06	(20.00) .787	(15.30) .602	(2.35) .093
-07	(25.00) .984	(20.30) .799	(2.31) .091
-08	(30.00) 1.181	(25.30) .996	(2.39) .094
-09	(35.00) 1.378	(30.30) 1.193	(2.46) .097

Through-hole Surface Mount

Dimensions: (2.54) .100, (0.51) .020, (5.08) .200, (2.54) .100, (0.64) .025 SQ, (7.16) .282, (1.27) .050, (1.50) .060, (2.30) .090, (2.54) .100

Labels: -VS, -RA

ALSO AVAILABLE (MOQ Required)

- Other sizes
- Other platings
- Latching feature
- No. 1 position polarized

Due to technical progress, all designs, specifications and components are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[IPT1-115-01-S-D-RA](#) [IPT1-125-01-S-D](#) [IPT1-120-01-S-D](#) [IPT1-105-01-S-D](#) [IPT1-105-01-S-D-RA](#) [IPT1-110-01-S-D-RA](#) [IPT1-106-01-S-D-RA](#) [IPT1-120-01-L-D](#) [IPT1-105-01-L-D](#) [IPT1-125-01-L-D-RA](#) [IPT1-120-01-L-D-RA](#) [IPT1-115-01-L-D](#) [IPT1-120-01-S-D-RA](#) [IPT1-115-01-L-D-RA](#) [IPT1-105-02-L-D](#) [IPT1-115-01-S-D](#) [IPT1-110-01-L-D-VS](#) [IPT1-110-05-L-D](#) [IPT1-110-03-L-D](#) [IPT1-110-01-S-D-PL](#) [IPT1-110-01-L-D](#) [IPT1-110-01-S-D](#) [IPT1-110-01-L-D-RA](#) [IPT1-110-04-L-D](#) [IPT1-105-06-L-D](#) [IPT1-120-01-L-D-VS](#) [IPT1-110-06-L-D](#) [IPT1-105-01-L-D-VS](#) [IPT1-115-01-L-D-VS](#) [IPT1-125-01-L-D](#) [IPT1-105-07-L-D](#) [IPT1-105-01-L-D-RA](#) [IPT1-105-04-L-D](#) [IPT1-105-03-L-D](#) [IPT1-107-01-L-D-RA](#) [IPT1-108-01-L-D](#) [IPT1-103-01-S-D-RA](#) [IPT1-104-01-L-D-VS](#) [IPT1-115-01-L-D-VS-K-TR](#) [IPT1-117-01-L-D-VS](#) [IPT1-109-01-S-D](#) [IPT1-109-01-S-D-RA](#) [IPT1-110-01-S-D-VS](#) [IPT1-103-01-S-D](#) [IPT1-107-01-S-D-RA](#) [IPT1-108-01-S-D-RA](#) [IPT1-116-01-S-D-RA](#) [IPT1-118-01-S-D-RA](#) [IPT1-150-01-S-D-VS](#) [IPT1-111-01-S-D-VS-A](#) [IPT1-117-01-S-D](#) [IPT1-110-01-S-D-VS-A-K](#) [IPT1-105-01-S-D-VS](#) [IPT1-113-01-S-D](#) [IPT1-104-01-S-D-RA](#) [IPT1-105-01-S-D-VS-A](#) [IPT1-113-01-S-D-RA](#) [IPT1-107-01-S-D](#) [IPT1-125-01-S-D-RA](#) [IPT1-111-01-S-D-VS](#) [IPT1-150-01-S-D](#) [IPT1-120-01-S-D-VS](#) [IPT1-120-01-S-D-VS-LC](#) [IPT1-125-01-S-D-VS](#) [IPT1-108-01-S-D](#) [IPT1-111-01-S-D-RA](#) [IPT1-115-01-S-D-VS-A](#) [IPT1-125-01-S-D-VS-A](#) [IPT1-150-01-S-D-RA](#) [IPT1-105-01-S-D-VS-LC](#) [IPT1-106-01-S-D-VS](#) [IPT1-115-01-S-D-VS](#) [IPT1-105-01-S-D-FL](#) [IPT1-105-01-S-D-RA-FL](#) [IPT1-125-01-S-D-VS-FL](#) [IPT1-120-01-S-D-VS-K](#) [IPT1-112-01-S-D](#) [IPT1-112-01-S-D-RA](#) [IPT1-115-01-S-D-DH-A](#) [IPT1-125-01-S-D-VS-LC](#) [IPT1-110-01-S-D-VS-LC](#) [IPT1-115-01-S-D-VS-LC](#) [IPT1-125-01-S-D-DH-A](#) [IPT1-105-01-SM-D-VS](#) [IPT1-116-01-S-D-VS-LC-K](#) [IPT1-120-01-H-D-RA](#) [IPT1-104-01-S-D-DH-A](#) [IPT1-105-01-S-D-VS-FL](#) [IPT1-125-01-S-D-RA-FL](#) [IPT1-110-01-S-D-VS-A](#) [IPT1-105-01-SM-D-RA](#) [IPT1-106-01-S-D](#) [IPT1-106-01-S-D-VS-LC](#) [IPT1-103-01-SM-D](#) [IPT1-110-01-S-D-VS-A-K-TR](#) [IPT1-110-01-SM-D-RA](#) [IPT1-102-01-S-D](#) [IPT1-108-01-S-D-VS-LC](#) [IPT1-125-01-S-D-FL](#) [IPT1-111-01-S-D](#)