

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0014562108**
Status: **Active**
Overview: SL Modular Connectors
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version G, Positive Lock, Wire Size 24 AWG, 0.76µm Gold (Au), 10 Circuits

Documents:

3D Model	Product Specification TS-70541-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-0001-001 (PDF)
Product Specification PS-70400-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	<u>70400</u>
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Capable	No
Overview	<u>SL Modular Connectors</u>
Product Name	SL
UPC	800754216371

Physical


Circuits (Loaded)	10
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	1.720/g
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	24
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Material Info

Engineering Number	704001199
--------------------	-----------

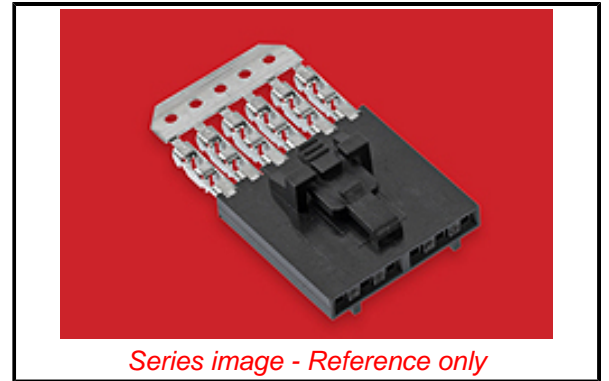

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

70400 Series

Mates With

Single Row Housing 70018 , 70107 Version A, 70107 Version B, 70543 , 70545 , 70553 , 70555

Use With

7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-70873-0001-001

PS-70400-001, TS-70541-001-001

SDA-70400-1191-1214

IDT - Semi-automatic 11200949
- Bench-Top
Terminator
IDT Discrete 621000700
Handtool Module
Ribbon Cable Tool 622016600
Kit, Press Not
Included
Hawk Ribbon Cable 623003000
Terminator without
Break-off
Hawk Semi- 623003100
Automatic Discrete
Wire Terminator
Hawk Semi- 623004900
Automatic Discrete
Wire Terminator
for Rebuilt CE
Approved*
Hawk Flat Flex Cable 623005200
Terminator with
Break-off
Hawk Ribbon Cable 623005300
Terminator with
Break-off

This document was generated on 11/28/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[14-56-2108](#)