





Heyco® CPV Solar Bulkhead Connectors

With Integral Sealing Ring for Creating a Liquid Tight Seal Through a Panel


PART NO.	DESCRIPTION	PART DIMENSIONS							
		A Max O.A. Length in. mm.		B Mounted Length in. mm.		C Wrenching Flats in. mm.		D Clearance Hole in. mm.	
Black									
S6360	CPV-P-BH	2.08	52,8	1.47	37,3	.98	24,9	.875	22,2
S6362	CPV-N-BH	1.44	36,5	.83	21,0				




MATES WITH HEYCO S6352 OR S6353




FOR USE WITH HEYCO 5837
MALE PIN




SUGGESTED CLEARANCE HOLE
FOR NONTHEREADED MOUNTING




MATES WITH HEYCO S6350 OR S6351



FOR USE WITH HEYCO 7349
FEMALE BARREL



SUGGESTED CLEARANCE HOLE
FOR NONTHEREADED MOUNTING

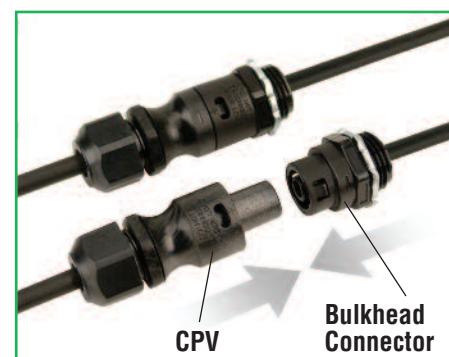

Material
Certifications

Polycarbonate
Recognized under the Component Program of Underwriters' Laboratories File E344722.

Flammability Rating
Temperature Range
IP Rating

VO
-40°F (-40°C) to 221°F (105°C)
IP 65 & IP 67

*Quick
Specs*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Heyco:

S6360 S6362