


| 1 | 2 |
|---|---|
|---|---|

|   |   |
|---|---|
| 7 | 8 |
|---|---|



- Protection level: IP 65/67
- Temperature range: -30°C ... +70°C

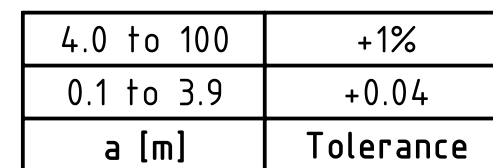

|                                |       |         |
|--------------------------------|-------|---------|
| length<br>in<br>"1m"<br>step   | 100   | XXX=000 |
|                                | 99    | XXX=990 |
|                                | .     | .       |
|                                | .     | .       |
|                                | 12    | XXX=120 |
|                                | 11    | XXX=110 |
| length<br>in<br>"0.1m"<br>step | 10    | XXX=100 |
|                                | 9.9   | XXX=099 |
|                                | 9.8   | XXX=098 |
|                                | .     | .       |
|                                | .     | .       |
|                                | 0.4   | XXX=004 |
|                                | 0.3   | XXX=003 |
|                                | 0.2   | XXX=002 |
|                                | 0.1   | XXX=001 |
| Step                           | a [m] | XXX     |

|                         |                 |
|-------------------------|-----------------|
| Part no.                | 213494004-XX-XX |
| Type of cable           | XX              |
| PVC, green, 4xAWG22/7   | XX=05           |
| PUR, green, 2x2xAWG22/7 | XX=77           |

|                                                                                       |  |                         |  |                                     |  |                          |  |                                                          |  |
|---------------------------------------------------------------------------------------|--|-------------------------|--|-------------------------------------|--|--------------------------|--|----------------------------------------------------------|--|
|  |  | All Dimensions<br>in mm |  | Tech. Character.                    |  | Free size tol.           |  | According to production drawing                          |  |
|  |  | All rights reserved     |  | Created by<br>MUNTEANV              |  | Inspected by<br>POPESCUD |  | Standardisation<br>AVRAM                                 |  |
| Department HCS - RO                                                                   |  |                         |  |                                     |  | Date<br>2017-04-06       |  | State<br>Final Release                                   |  |
| HARTING Customised Solutions                                                          |  |                         |  | Title<br>M12 D-coded Cable Assembly |  |                          |  | Doc-Key / ECM-Nr.<br>100588495/UGD/000/D<br>500000117781 |  |
| D-32427 Minden                                                                        |  | Type<br>TB              |  | Number<br>213494004XXXXX            |  |                          |  | Rev.<br>D                                                |  |
|                                                                                       |  |                         |  |                                     |  |                          |  | Page<br>1/1                                              |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## HARTING:

[21349400405010](#) [21349400405015](#) [21349400405020](#) [21349400405075](#) [21349400477010](#) [21349400477075](#)  
[21349400405100](#) [21349400477005](#) [21349400477100](#) [21349400405005](#) [21349400477015](#) [21349400477050](#)  
[21349400405050](#) [21349400477020](#)