




- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103902
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 FINISH: CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 FINISH: CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PER SIDEWAYS POSITION							
 OBSOLETE		2	2.40	1.198	1-103688-1	12	6-103976-1
		2	2.20	1.098	1-103688-0	11	6-103976-0
		2	2.00	.998	103688-9	10	5-103976-9
		2	1.80	.898	103688-8	9	5-103976-8
		2	1.60	.798	103688-7	8	5-103976-7
		2	1.40	.698	103688-6	7	5-103976-6
		4	2.39	.598	103688-5	6	5-103976-5
		4	1.99	.498	103688-4	5	5-103976-4
		5	1.99	.398	103688-3	4	5-103976-3
		8	2.40	.298	103688-2	3	5-103976-2
 OBSOLETE		10	2.00	.198	103688-1	2	5-103976-1
		2	2.40	1.198	1-103688-1	12	1-103976-1
		2	2.20	1.098	1-103688-0	11	1-103976-0
		2	2.00	.998	103688-9	10	103976-9
		2	1.80	.898	103688-8	9	103976-8
		2	1.60	.798	103688-7	8	103976-7
		2	1.40	.698	103688-6	7	103976-6
		4	2.39	.598	103688-5	6	103976-5
		4	1.99	.498	103688-4	5	103976-4
		5	1.99	.398	103688-3	4	103976-3
5-103976-6		8	2.40	.298	103688-2	3	103976-2
		10	2.00	.198	103688-1	2	103976-1
	PLATING		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

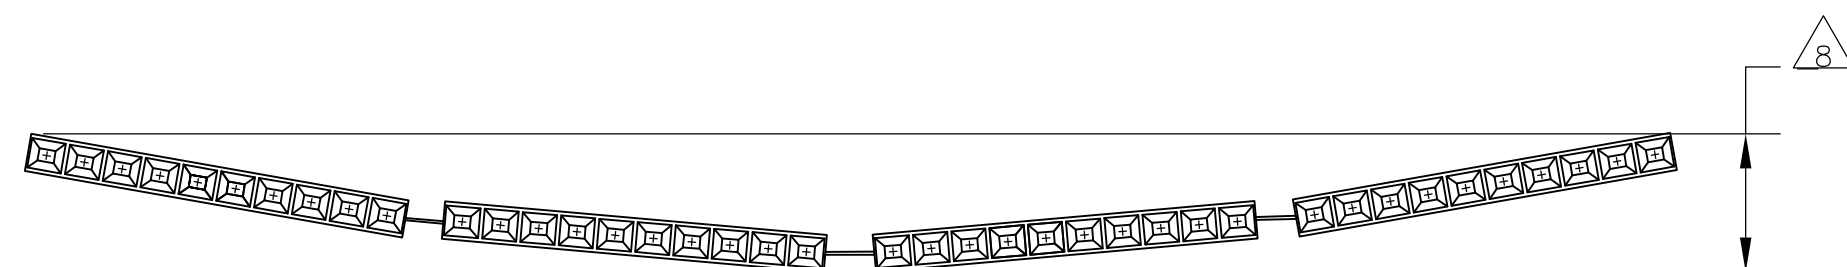

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.MAYER 05 NOV 86		 TE Connectivity	
		CHK P.C.DEJONG 12-11-86			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, FOR NOS22-NOS26 AWG WIRE SIZE, STRIP FORM	
		APVD P.C.DEJONG 12-11-86			
		PRODUCT SPEC 108-25034			
		APPLICATION SPEC 114-25026			
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK CONTACTS: PHOS. BRONZE		FINISH		SIZE A2	
SEE TABLE		WEIGHT —		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-103976	
				RESTRICTED TO —	
				SCALE 4:1 SHEET 1 OF 1 REV K2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103976-2](#)