


COIL: @ +25° C  
 RESISTANCE 160 OHMS ± 10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.4 VDC  
 MUST RELEASE 4.0 VDC MAX 0.7 VDC MIN

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

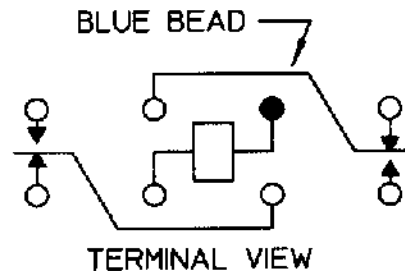

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/20/98 CK. *[Signature]*



CUST. GPL  
 CUST. NO. M39016/6-114M

TYPE "HFW" RELAY

HFW1131G01M

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HFW1131G01M](#)