
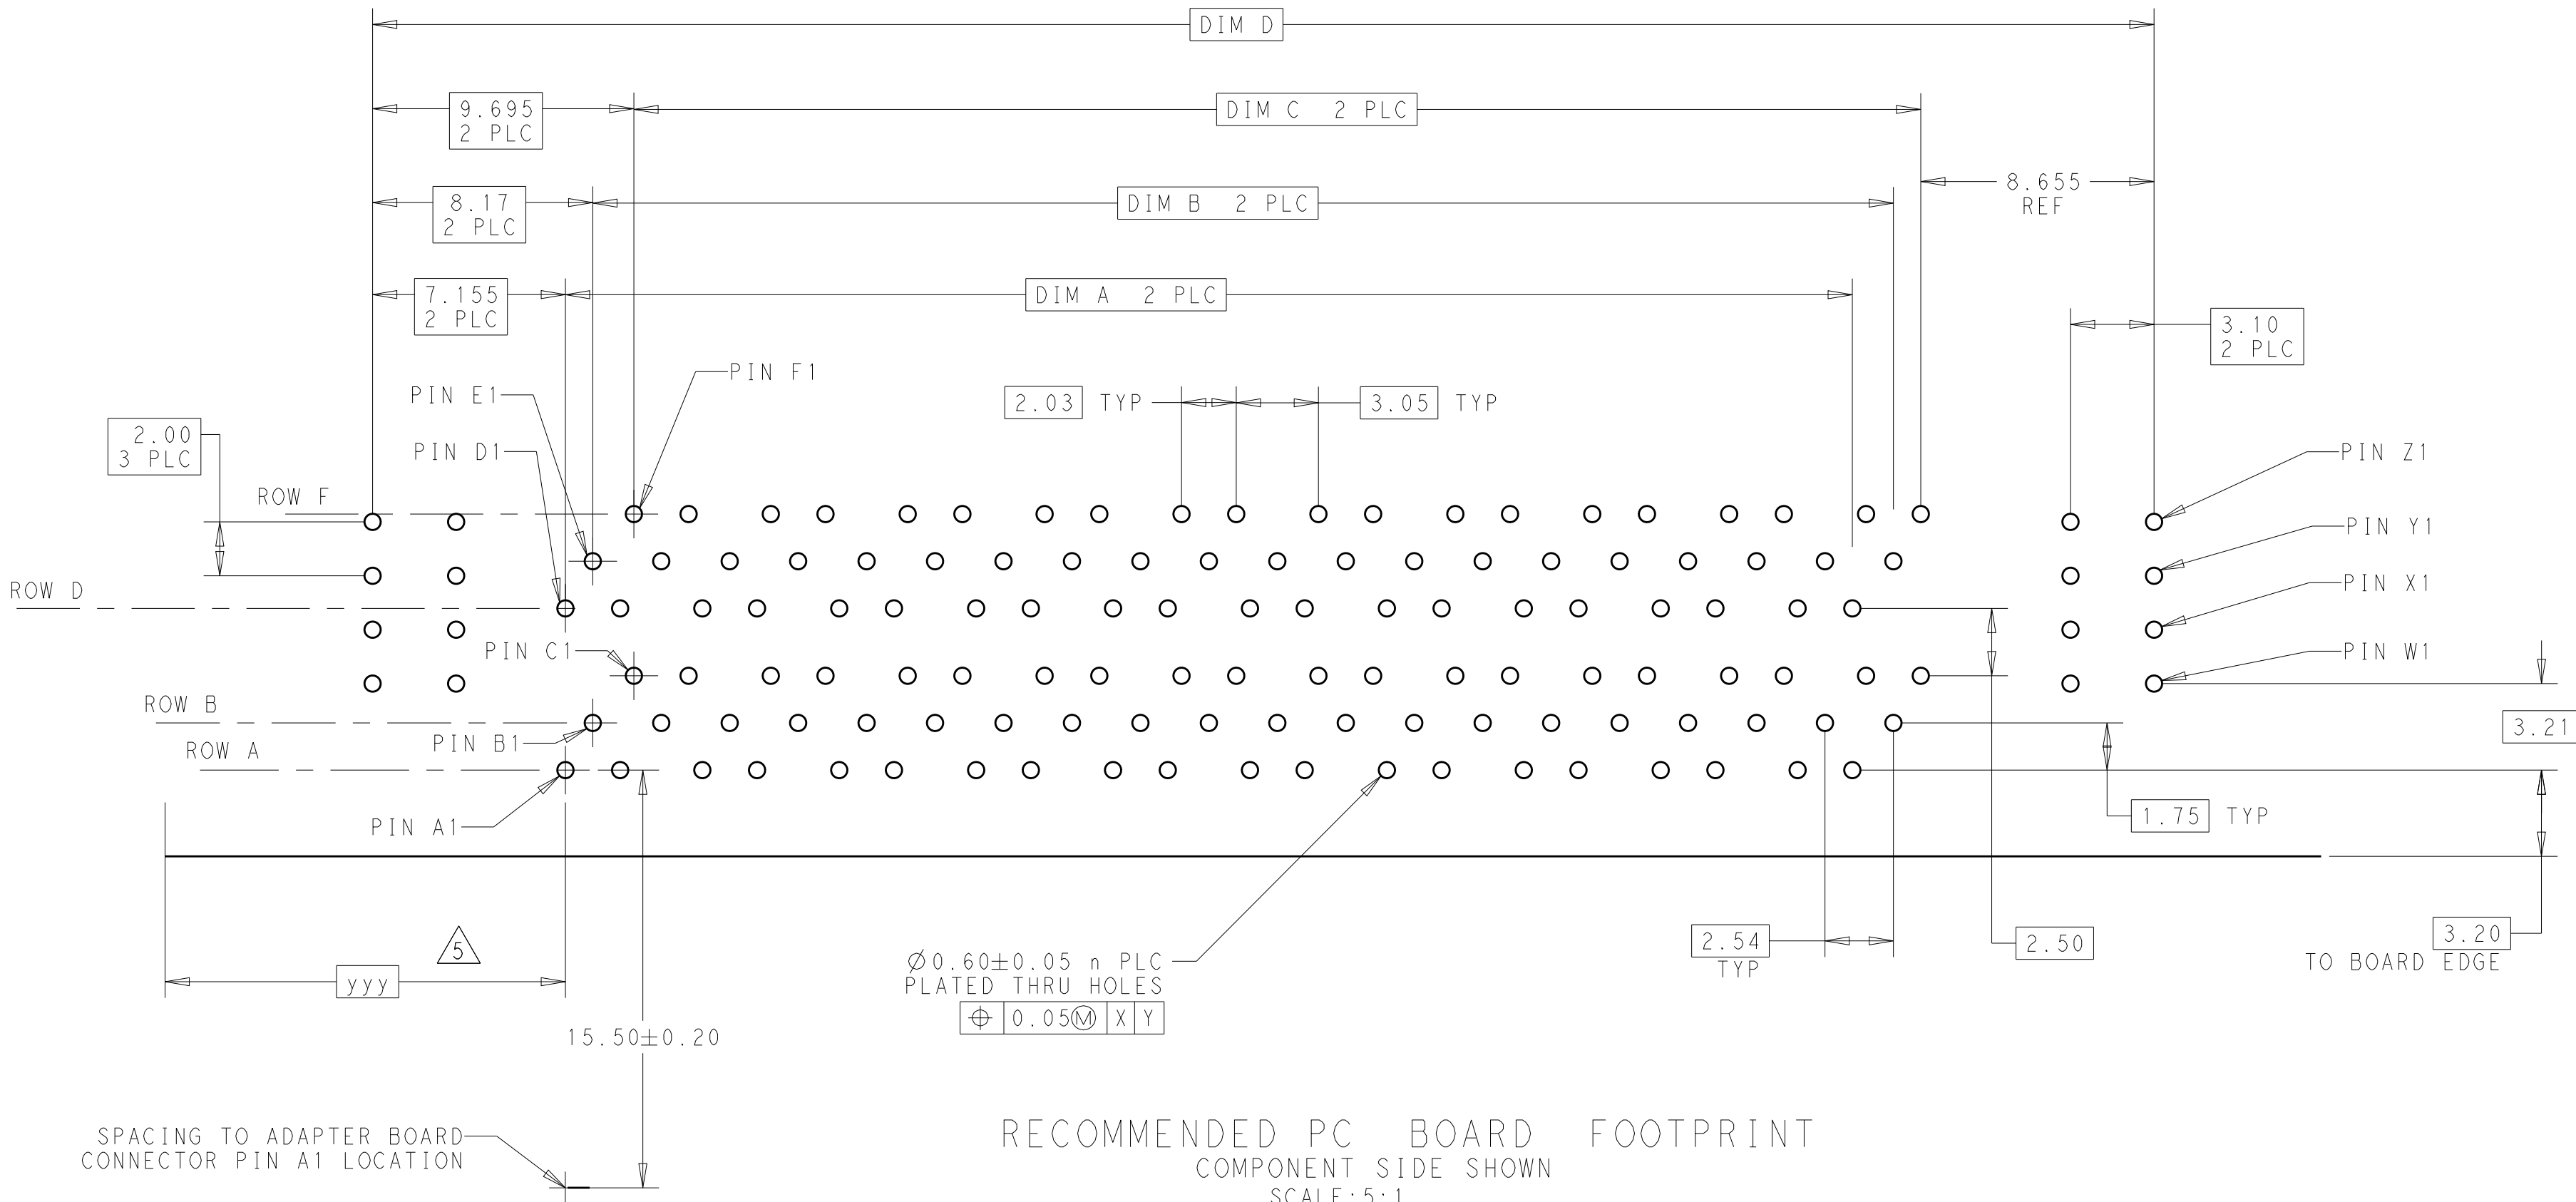
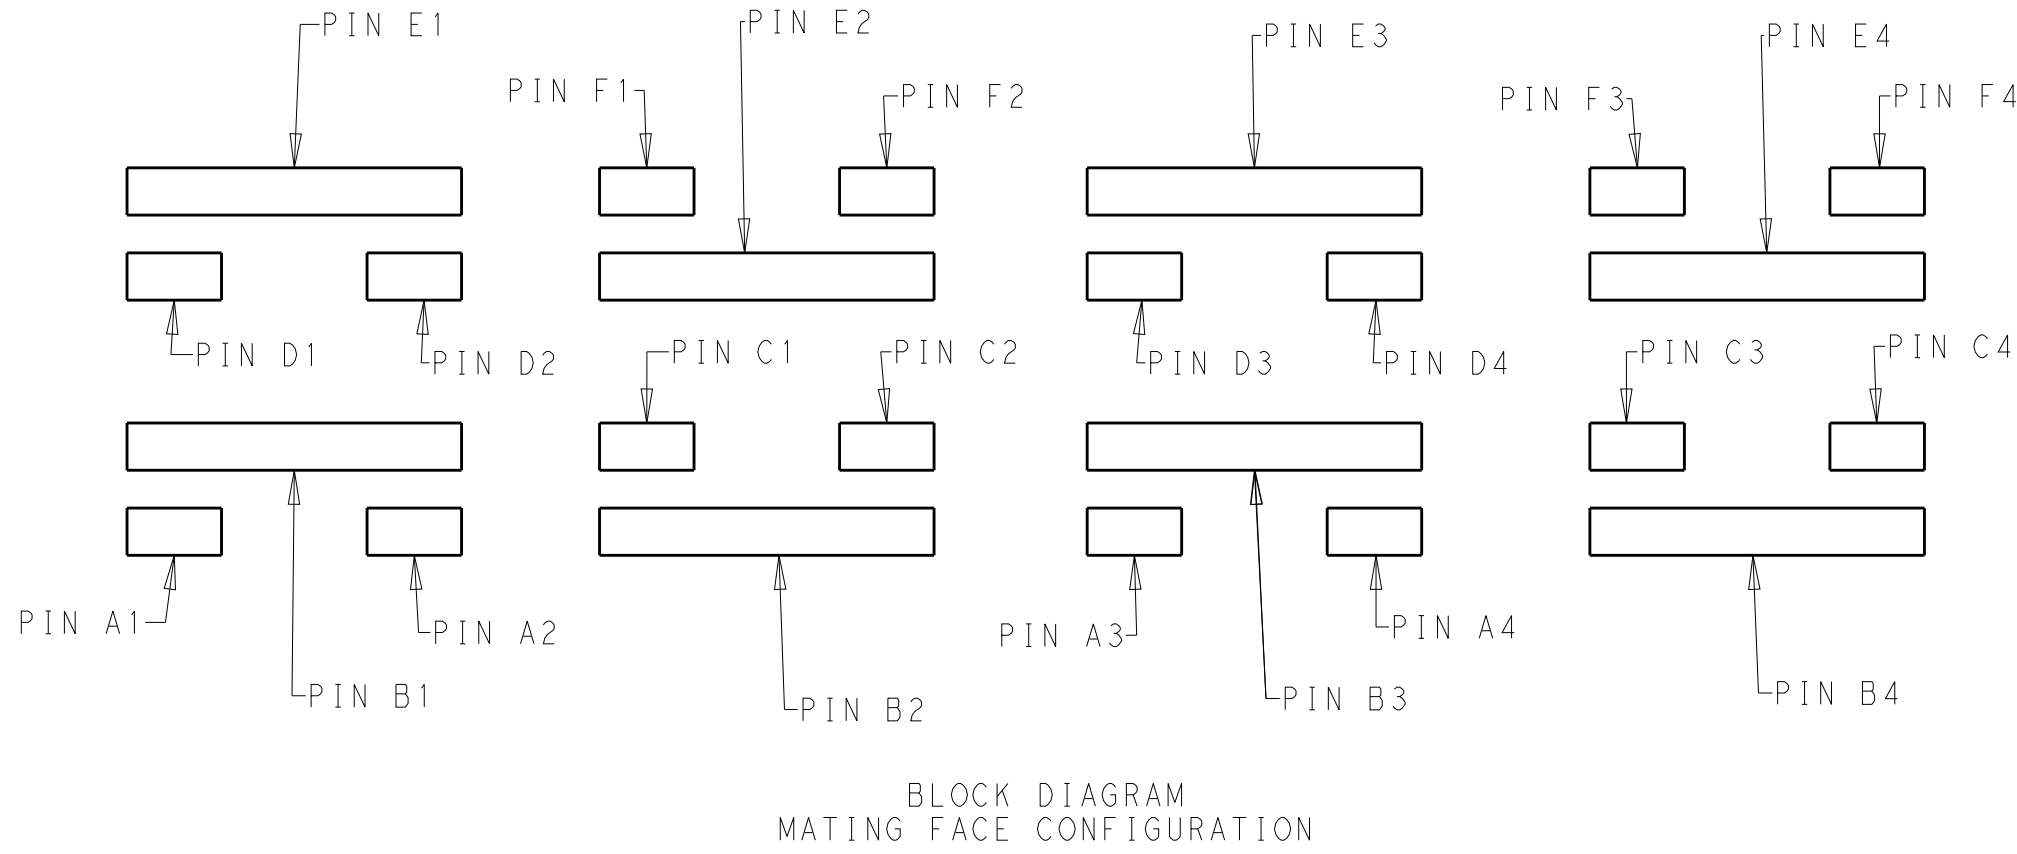
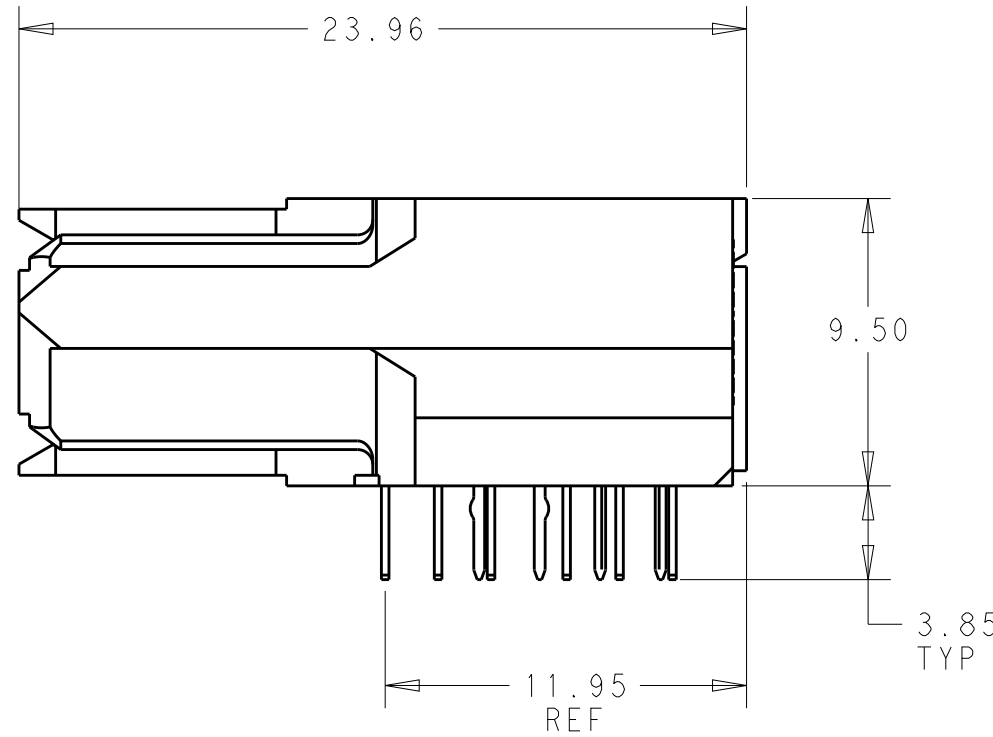
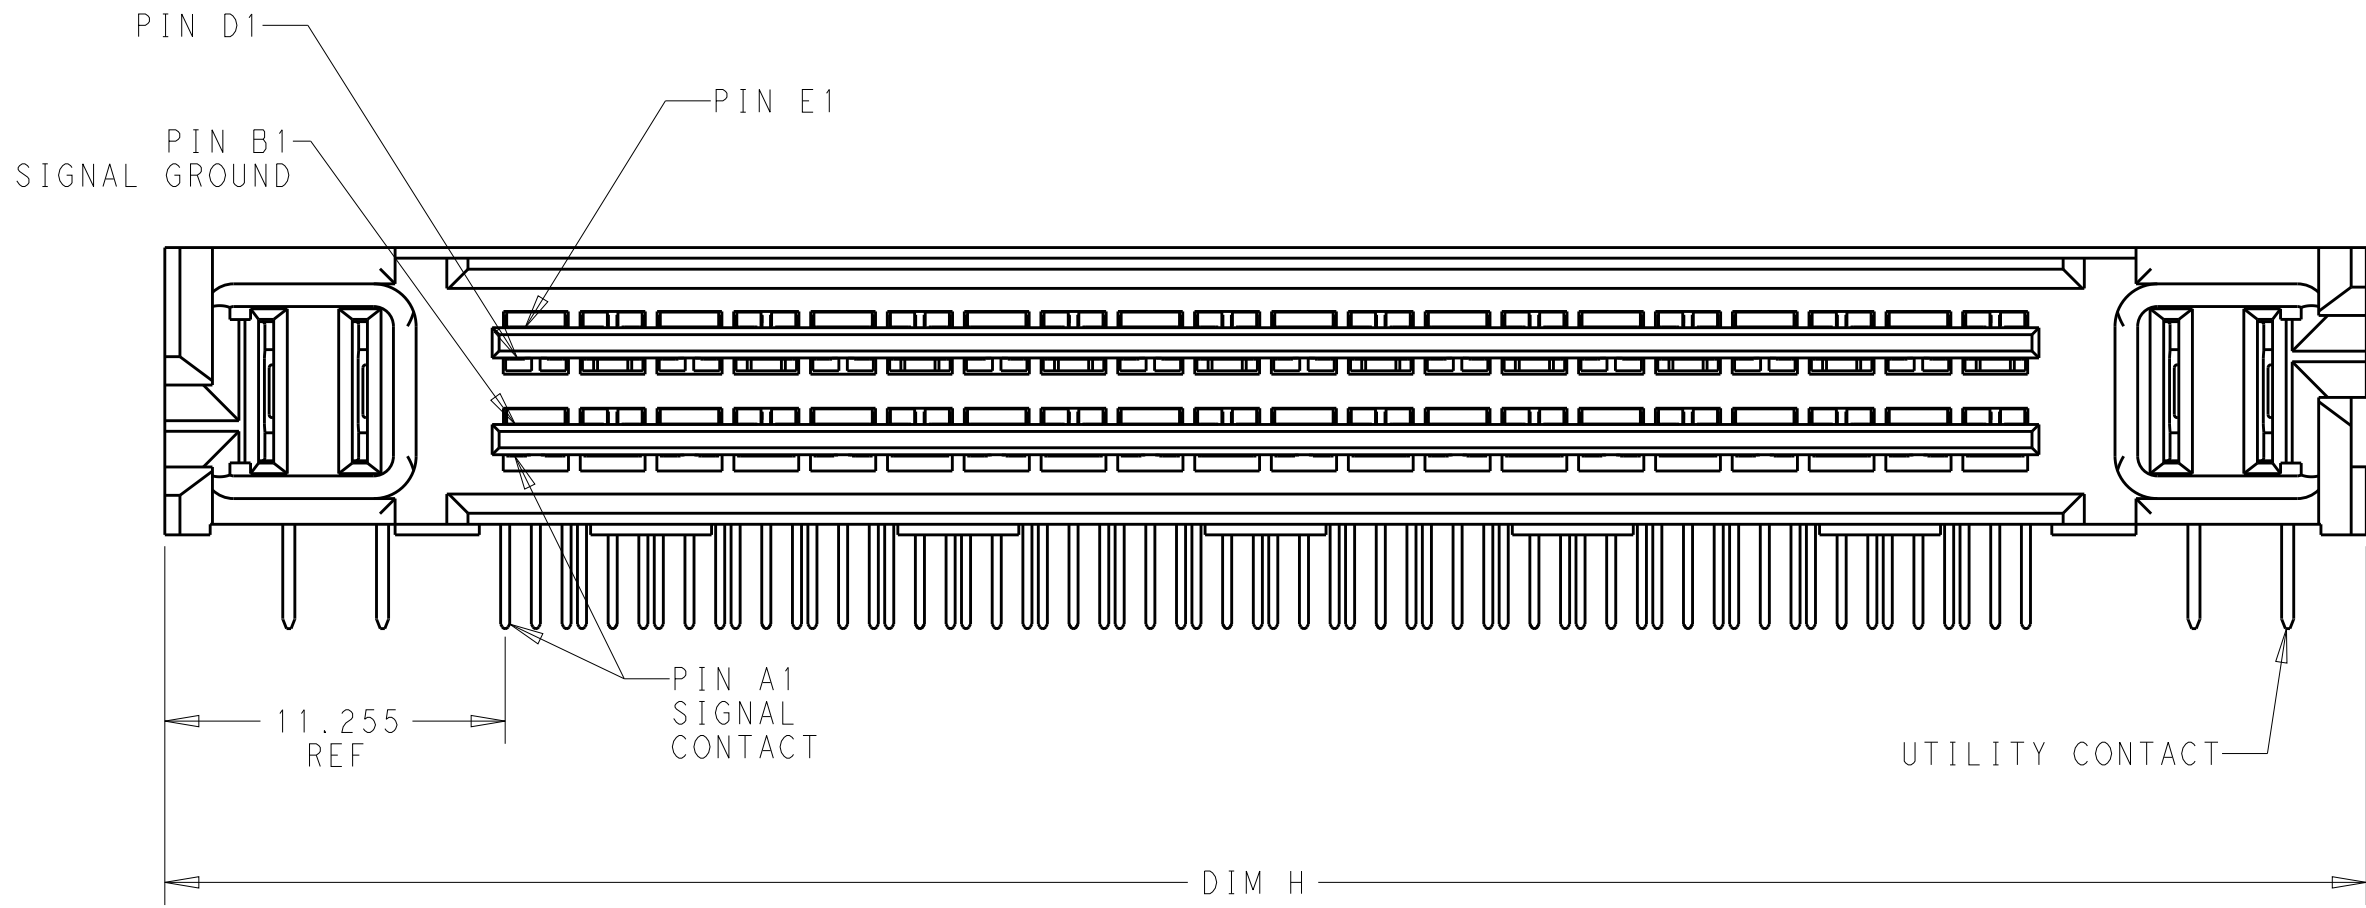


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER ECO-10-012356	16DEC2010	CJV	EJB
C		ECO-15-006497	18APR2016	LL	SH

- △ HOUSINGS; POLYESTER, UL 94V-0 RATED, NATURAL
SIGNAL AND SIGNAL GROUND CONTACTS: COPPER ALLOY
UTILITY CONTACTS: PHOSPHOR BRONZE
- △ UTILITY CONTACTS: 0.76µm MIN GOLD IN CONTACT AREA,
2.54µm MIN TIN ON PCB TAILS, OVER 1.27µm MIN NICKEL OVER ALL.
SIGNAL AND SIGNAL GROUND CONTACTS: 0.76µm MIN GOLD IN CONTACT AREA,
2.54µm MIN TIN ON PCB TAILS, OVER 1.27µm MIN NICKEL OVER ALL.
3. ROWS A, C, D, AND F ARE SIGNAL CONTACTS. ROWS B AND E ARE SIGNAL GROUND CONTACTS.
- △ CONNECTOR SIZE CAN ACCOMMODATE INDICATED QUANTITY OF DIFFERENTIAL PAIRS.
- △ DIMENSIONS PER CUSTOMER BOARD LAYOUT.
- △ COMPANY LOGO IN APPROXIMATE AREA SHOWN.
- △ OBSOLETE PART.

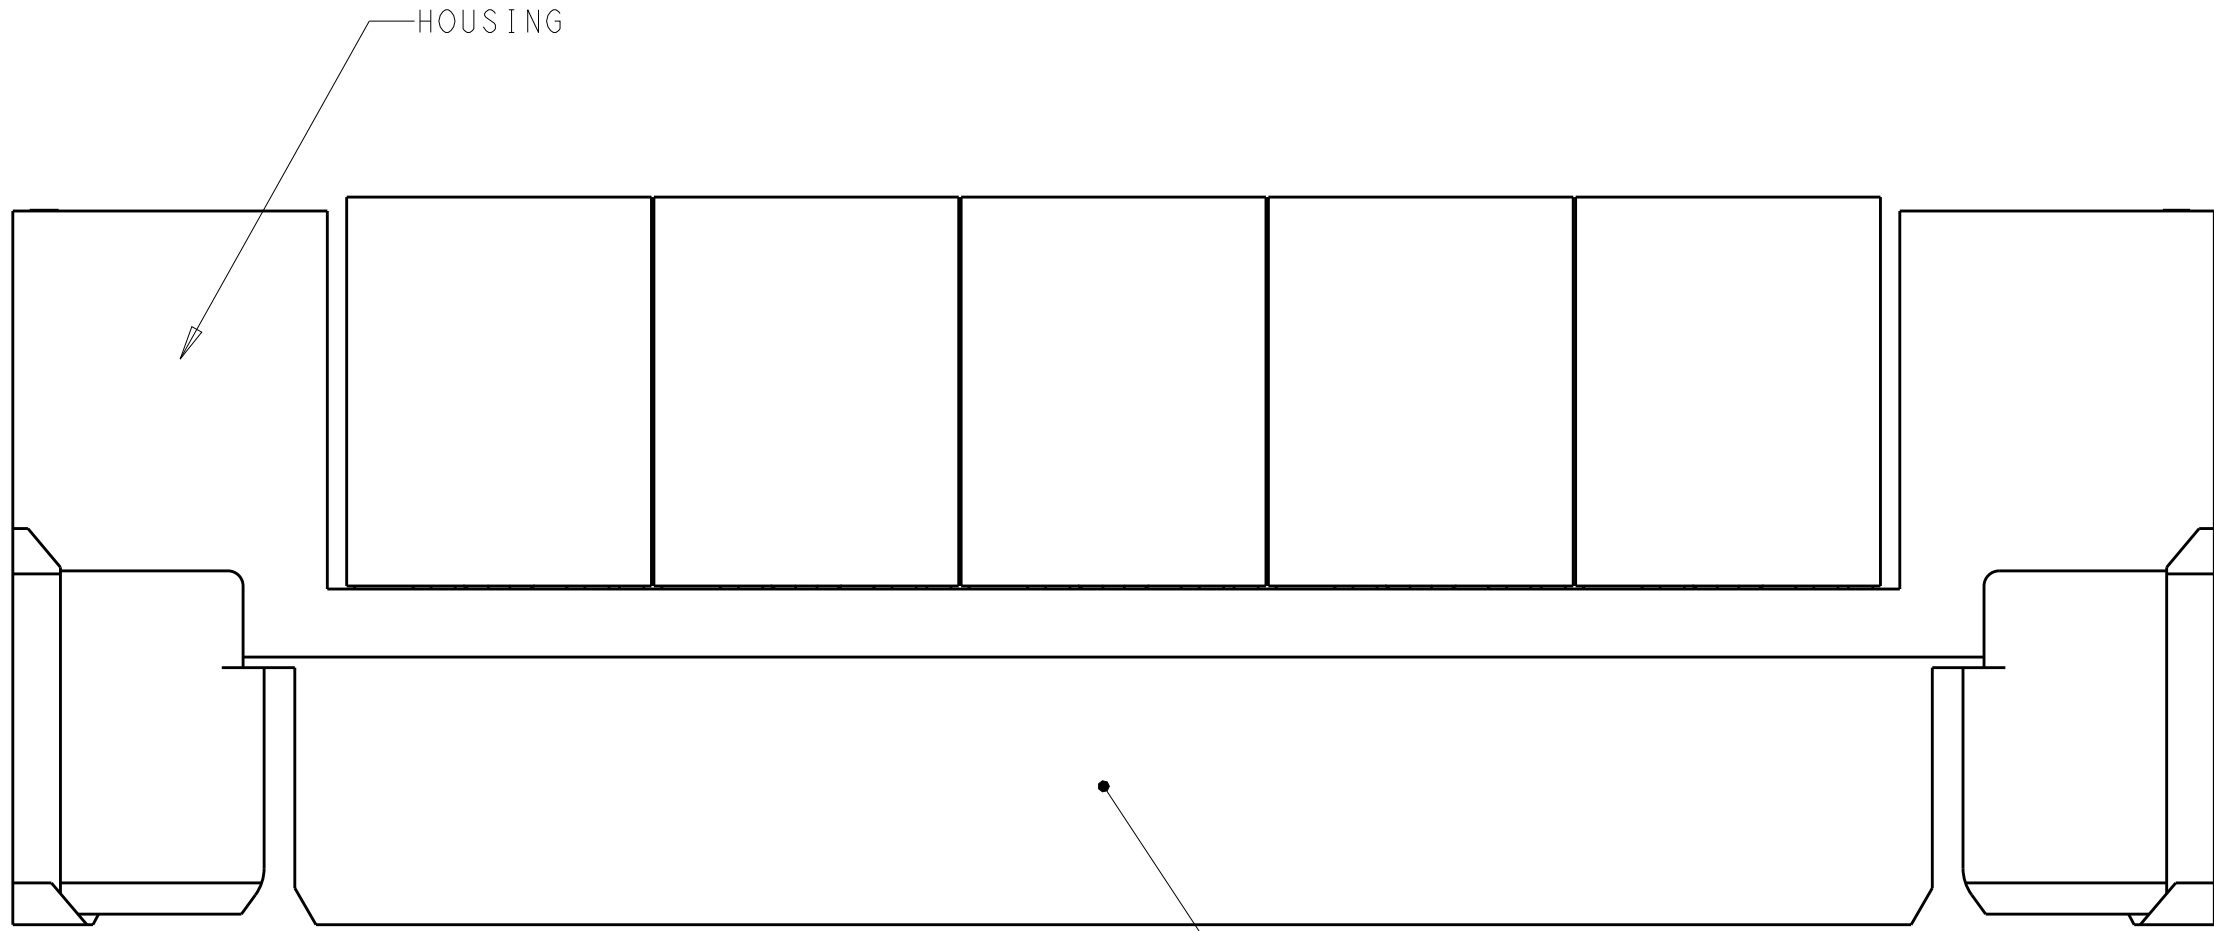

RECOMMENDED PC BOARD FOOTPRINT
COMPONENT SIDE SHOWN
SCALE:5:1

△	232	113.44	106.74	88.90	88.39	72	6367680-9
△	208	103.28	96.58	78.74	78.23	64	6367680-8
△	184	93.12	86.42	68.58	68.07	56	6367680-7
△	160	82.96	76.26	58.42	57.91	48	6367680-6
△	136	72.80	66.10	48.26	47.75	40	6367680-5
	112	62.64	55.94	38.10	37.59	32	6367680-4
	88	52.48	45.78	27.94	27.43	24	6367680-3
	64	42.32	35.62	17.78	17.27	16	6367680-2
△	40	32.16	25.46	7.62	7.11	8	6367680-1
	N	H DIM	D DIM	B DIM	A OR C DIM	DIFF PAIRS △	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTIN CHK E. BRIANT APVD F. BRIANT	16DEC2010 16DEC2010	NAME Z-DOK+ HOST BRD CONNECTOR ASSEMBLY, 8-72 SIGNAL DIFF. PAIR, 2 UTILITY CONTACTS PER SIDE, 3.85mm TAILS		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1985		
				APPLICATION SPEC 114-13068		
MATERIAL -		FINISH △		WEIGHT -		
				CUSTOMER DRAWING		
				SCALE 4:1 SHEET 1 OF 1 REV C		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6367680-3](#)