




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	12.0	\pm Max
T:	5.0	\pm Max
Lead Diameter	0.8	\pm Nom
S:	7.8	\pm Nom
L:	38.0	\pm Min
Coating Lead Run Down (straight Leads)		\pm
B:		\pm
C:		\pm

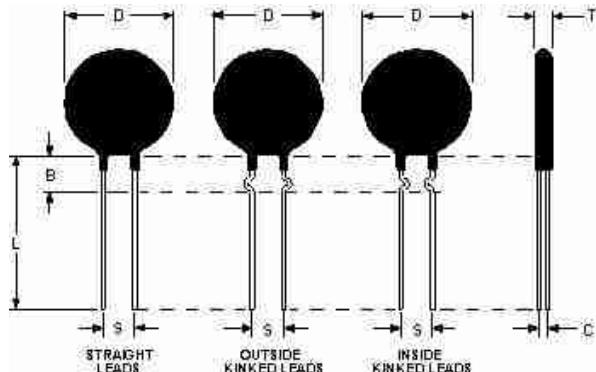

Electrical Specifications

Resistance:	5.0	Ω	\pm	20 %
Max Steady State Current upto 65°C:	4.00	A		
Max Rec. Energy Rating:	40	J		
Actual Failure Instantaneous Energy:	80	J		
Resistance @ 100% Max Current:	0.07	Ω		
Resistance @ 50% Max Current:	0.15	Ω		
Body Temperature at 100% Max Current:	182.00	°C		
Dissipation Constant:	12.5	mw/°C		
Thermal Time Constant:	22	Sec.		
Material Type (for Beta and Curve):	B			

SL12 5R004

Date: 04/08/2011	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revison: A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL12 5R004](#) [SL125R005](#)