



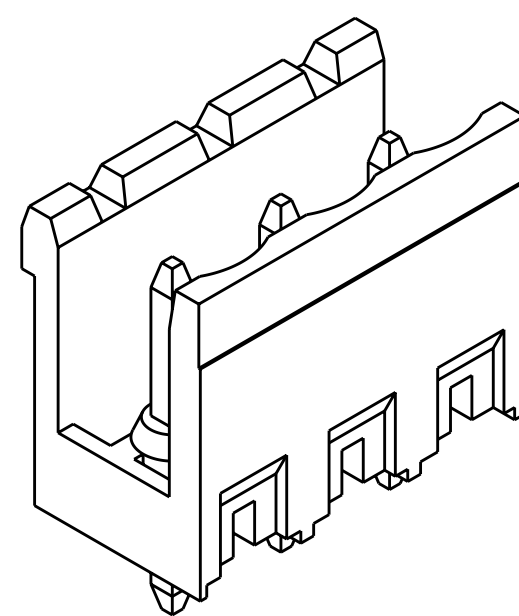

- ① MATERIALS AND FINISH:
HOUSING: PA 6-6, UL 94-V0, COLOR GRAY.
TERMINAL: COPPER ALLOY, FINISH: TIN PLATED.
2. SUITABLE FOR 1,6-2,4mm PC BOARD THICKNESS.
3. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.
4. RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE N°E60677.
5. IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.
- ⑥ NOT CUMULATIVE TOLERANCE.

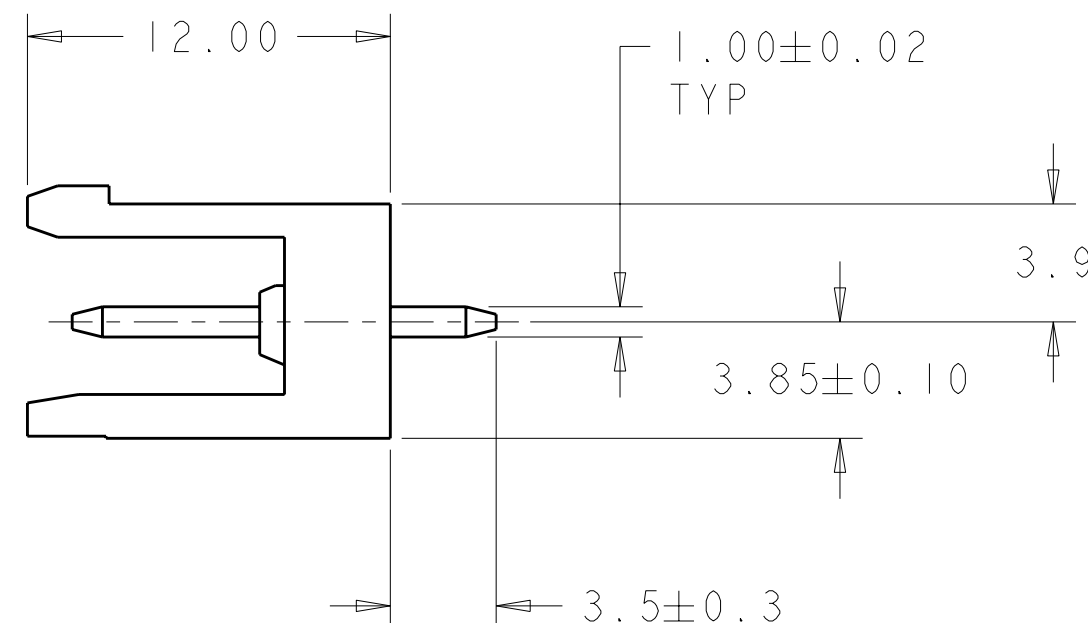

RECOMMENDED PC BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 02JUN2003 CHK C. RICHARD 02JUN2003 APVD C. RICHARD 02JUN2003		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±.3 2 PLC ±.25 3 PLC ±.3 4 PLC ±.3 ANGLES ±2 FINISH		NAME TERMINAL BLOCK HEADER ASSEMBLY 180 DEGREE OPEN ENDS, STACKING 5.08mm PITCH	
MATERIAL 		WEIGHT -		SIZE A2	
		APPLICATION SPEC 108-20166		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1546213	
				RESTRICTED TO -	
				SCALE 3. SHEET OF REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1546213-1](#)