

## Feature

- § Low Power Consumption
- § High Intensity
- § I.C. compatible


## Applications

- § Commercial Outdoor Sign Board
- § Front Panel Indicator
- § Dot-Matrix Module
- § LED Bulb

## Description

- § These High Intensity LEDs are Based on GaAsP/GaP Material Technology
- § Emitted color:Yellow
- § Water Transparent Lens

## Package Dimension

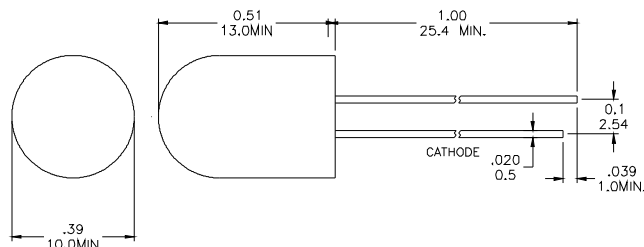

\* Tolerance :  $\pm \frac{0.01}{0.25}$  Unit :  $\pm \frac{\text{inch}}{\text{mm}}$

## Absolute Maximum Ratings at Ta=25°C

| Symbol                                                                        | Parameter                             | Max.         | Unit  |
|-------------------------------------------------------------------------------|---------------------------------------|--------------|-------|
| PD                                                                            | Power Dissipation                     | 100          | mW    |
| VR                                                                            | Reverse Voltage                       | 5            | V     |
| IAF                                                                           | Average Forward Current               | 25           | mA    |
| IPF                                                                           | Peak Forward Current (Duty=0.1, 1kHz) | 85           | mA    |
| —                                                                             | Derating Linear Form 25°C             | 0.4          | mA/°C |
| Topr                                                                          | Operating Temperature Range           | -40 to + 80  | °C    |
| Tstg                                                                          | Storage Temperature Range             | -40 to + 100 | °C    |
| Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260°C For 5 Seconds. |                                       |              |       |

## Electrical / Optical Characteristics and Curves at Ta=25°C

| Symbol             | Parameter            | Test Condition | Min. | Typ. | Max. | Unit    |
|--------------------|----------------------|----------------|------|------|------|---------|
| VF                 | Forward Voltage      | IF= 20 mA      |      | 2.0  | 2.4  | V       |
| IR                 | Reverse Current      | VR= 5 V        |      |      | 100  | $\mu$ A |
| $\triangle \theta$ | Half Intensity Angle | IF= 20 mA      |      | 30   |      | Deg.    |
| IV                 | Luminous Intensity   | IF= 20 mA      |      | 200  |      | mcd.    |
| $\lambda p$        | Peak Wavelength      | IF= 20 mA      |      | 593  |      | nm      |
| $\lambda d$        | Dominant Wavelength  | IF= 20 mA      |      | 590  |      | nm      |

## Electrical Characteristics at Ta=25°C

| Symbol    | I <sub>v</sub>     |       | V <sub>F</sub>  |         | λ D                 |         |
|-----------|--------------------|-------|-----------------|---------|---------------------|---------|
| Parameter | Luminous Intensity |       | Forward Voltage |         | Dominant Wavelength |         |
| Condition | IF=20mA            |       | IF=20mA         |         | IF=20mA             |         |
| Unit      | mcd                |       | V               |         | nm                  |         |
| Binning   | Grade              | Range | Grade           | Range   | Grade               | Range   |
|           |                    |       | B               | 1.8~1.9 | Y3                  | 589~591 |
|           |                    |       | C               | 1.9~2.0 | Y4                  | 591~593 |
|           |                    |       | D               | 2.0~2.1 | Y5                  | 593~595 |
|           |                    |       | E               | 2.1~2.2 |                     |         |
|           |                    |       | F               | 2.2~2.3 |                     |         |
|           |                    |       | G               | 2.3~2.4 |                     |         |

Intensity: Tolerance of minimum and maximum = ± 15%


V<sub>f</sub>: Tolerance of minimum and maximum = ± 0.05v

NOTE:

1. Static electricity and surge damages the LED. It is recommend to use a anti-static wrist band or anti-electrostatic glove when handing the LEDs. All devices, equipment and machinery must be properly grounded.
2. Specific binning requirements –please contact our home office

## Radiation Diagram

**IF=20 mA 50% Power Angle Angle =30°**

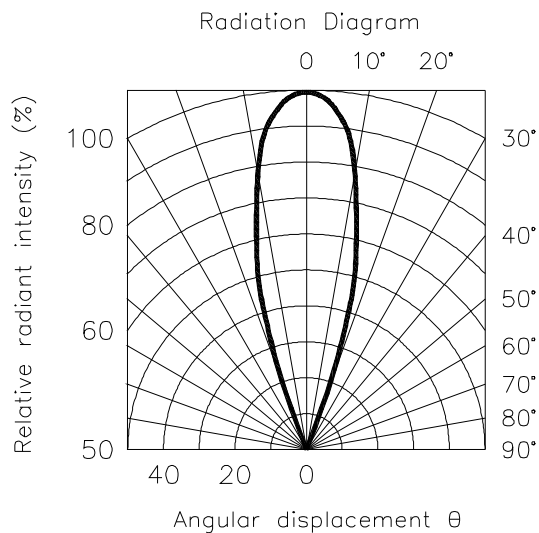

## YELLOW

### Typical Electro-optical Characteristic Curves (25°C Free Air Temperature Unless Otherwise Specified)




Fig.1 FORWARD CURRENT VS FORWARD VOLTAGE

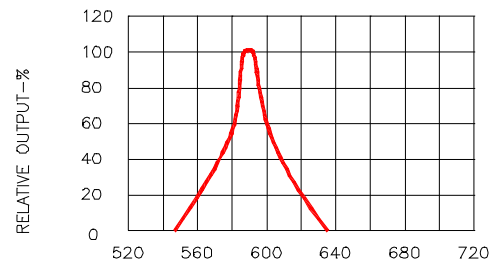


Fig.2 SPECTRAL RESPONSE




Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

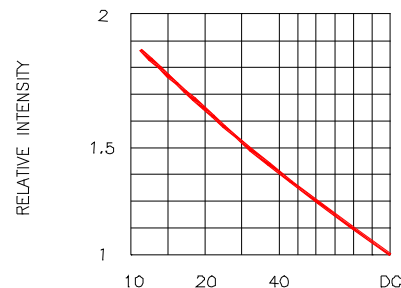


Fig.4 LUMINOUS INTENSITY VS. DUTY CYCLE

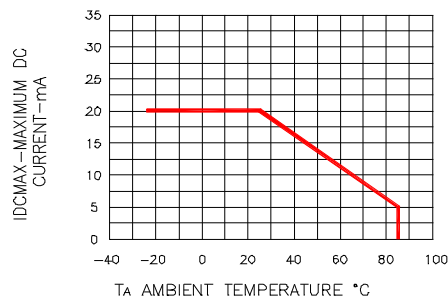


Fig.5 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

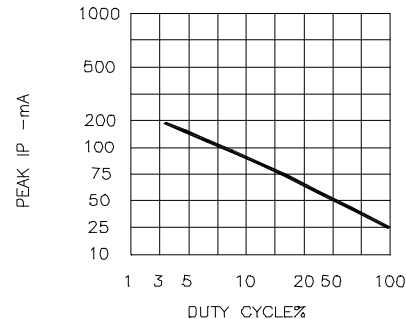


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE (REFRESH RATE f=1KHz)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[VAOL-10GCE4](#)