



DIMENSIONS mm (inches)

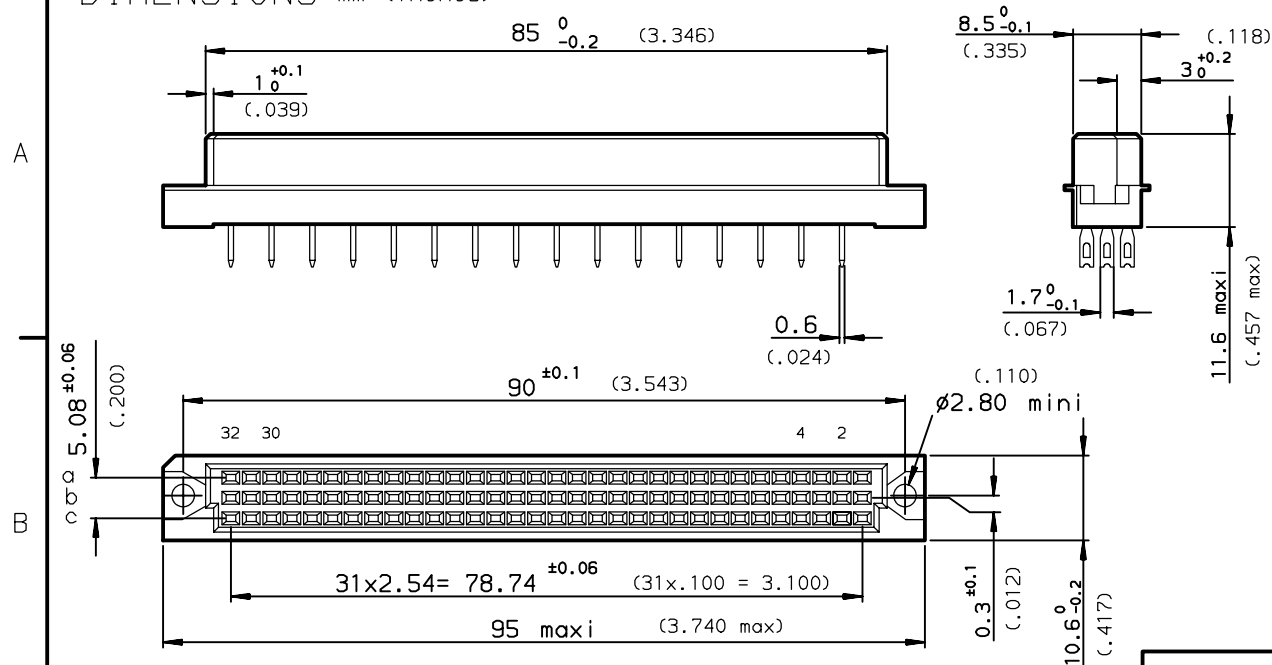

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000B

PART NUMBER		8609			81		7		8	
PIN OUT										
rows a-b-c		=		=		=		3		48
rows a-c		=		=		=		4		32
NUMBER OF CONTACTS										
TERMINATION										
L1 = 5.35 ±0.35 (.210)		=		=		=		=		09
L2 = 13.35 ±0.35 (.525)		=		=		=		=		10
L1 and L2		=		=		=		=		08
PERFORMANCE CLASS										
DIN 41612 class 3		=		=		=		=		4
DIN 41612 class 2		=		=		=		=		5
DIN 41612 class 1		=		=		=		=		6
TERMINATION TYPE										
TIN LEAD		=		=		=		=		000E1
LEAD FREE		=		=		=		=		E1LF

TERMINATION

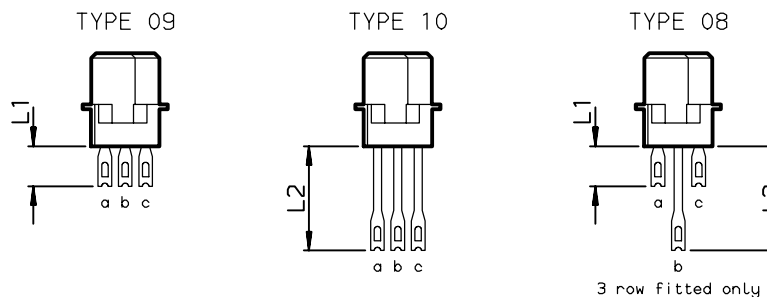

rev	ecn no	dr	date
A	-	ROU	1997/10/30
B	LS05-005	JTA	2005/03/17
C	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3
Dr	ROUILLARD	1997/10/30	0.X	±0.1
Eng	TARON	1997/10/30	0.XX	±0.1
Chr	LEGARE	1997/10/30	0.XX' ±2'	±0.1
Appr	LEGARE	1997/10/30	0.XXX	±0.1
Product family		DIN 8609		Spec ref -
title STRAIGHT FEMALE - STYLE C		SOLDER EYELET		Rev. C
catalog no		C-8609-0655		sheet 1 of 1

European Views

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093488109758E1LF](#) [86094328109758E1LF](#)