

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2011
 © COPYRIGHT 2000 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J			CI	REVISED PER ECO-11-005140	05APR2011	RK	HMR

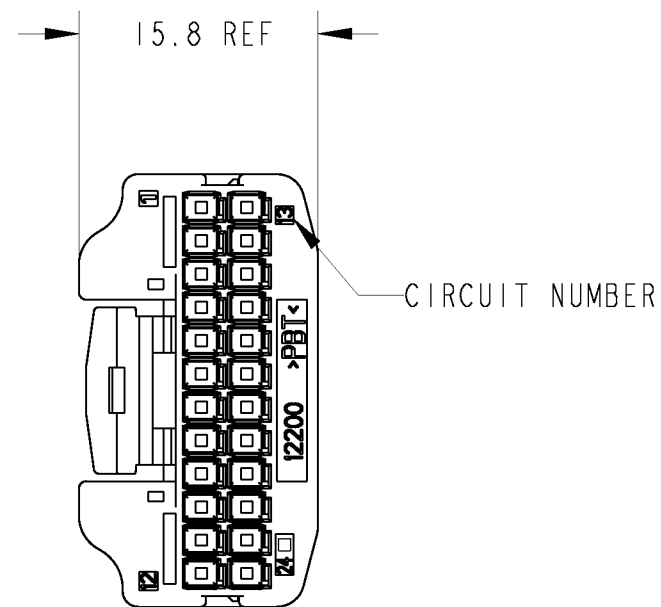
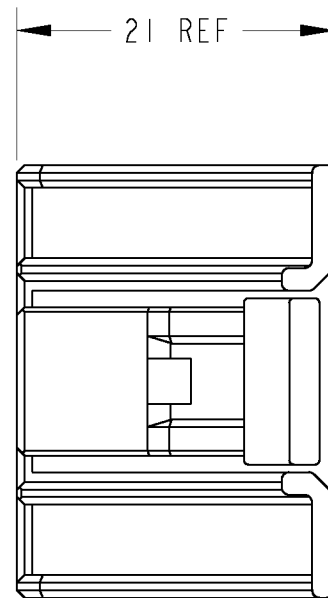
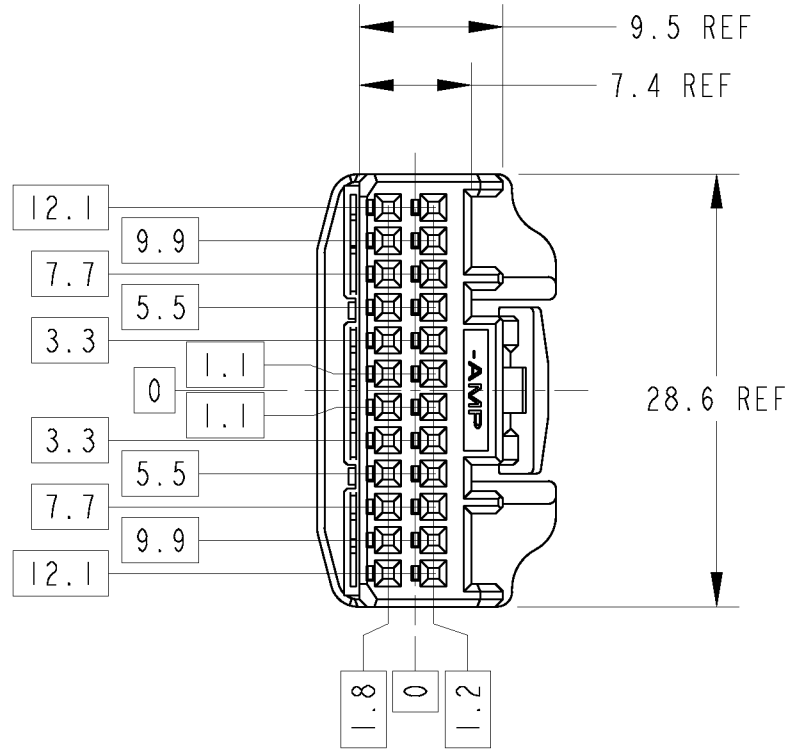


TABLE-1

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
24	1318853-1

TABLE-2

		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/CAVUS 0.3~0.5mm ² AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

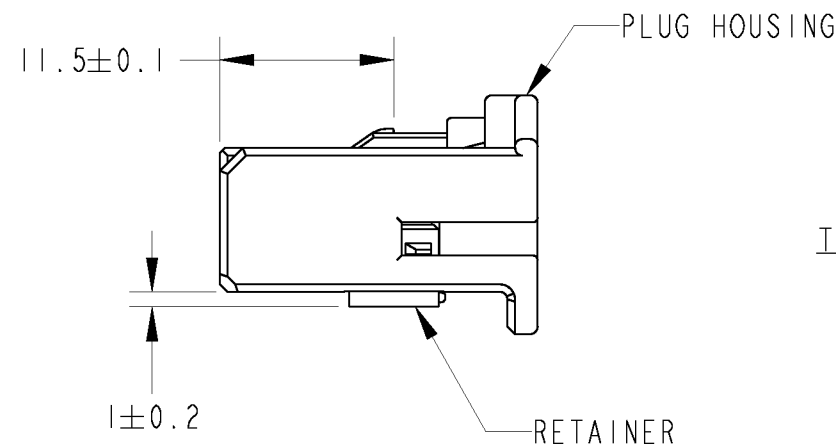



TABLE-3

PAPER BOX ダンボール	PLASTIC BAG ビニール袋	COLOR	PART NUMBER
		BLACK Δ 7	1318917-2
		NATURAL Δ 7	1318917-1
OUTER 外装	INNER 内装	COLOR	PART NUMBER
PACKING STYLE 梱包形態			

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
4. INSTRUCTION SHEET NO : 411-5928
5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
6. APPLIED TERMINAL : SEE TABLE -2
7. RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナーを仮止して出荷する
2. 仮止時リテーナー突起がハウジングの外側に出ていること
3. リテーナーの仮係止保持力は 20N 以上
4. 取扱い説明書 NO : 411-5928
5. 嵌合相手型番は TABLE -1参照
6. 適用端子は TABLE -2参照
7. リテーナーはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N. YASUDA 08MAR00	 TE Connectivity	
DIMENSIONS: 単位: 概 mm		CHK N. SAI 10MAR00		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3		APVD N. SAI 10MAR00	NAME 名称	
0-PLC ±		PRODUCT SPEC 製品規格	025 SERIES 24POSITION PLUG HOUSING ASSEMBLY	
1-PLC ±0.1		APPLICATION SPEC 取付適用規格	SIZE	RESTRICTED TO
2-PLC ±0.01		108-5668	A3	
3-PLC ±0.001		114-5250	CAGE CODE	
4-PLC ±0.000		WEIGHT	00779	
ANGLES ±3'00"		CUSTOMER DRAWING	DRAWING NO	
MATERIAL 材料	PBT	FINISH 仕上	C=1318917	
SEE TABLE-3		SCALE 尺度	2:1	
		SHEET	1	
		OF	1	
		REV	CI	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318917-1](#)