

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 19

ALL RIGHTS RESERVED.

LOC
JDIST
X

REVISIONS

変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED	ECR-11-011495	02JUN11	TS

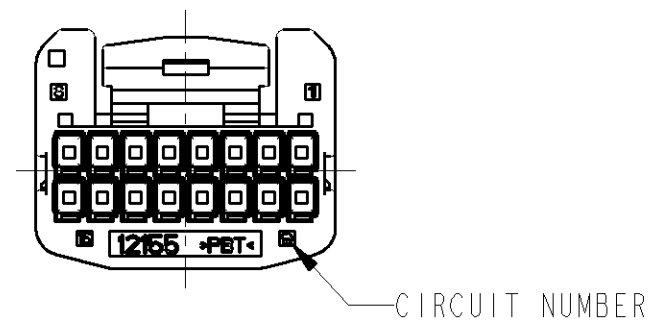
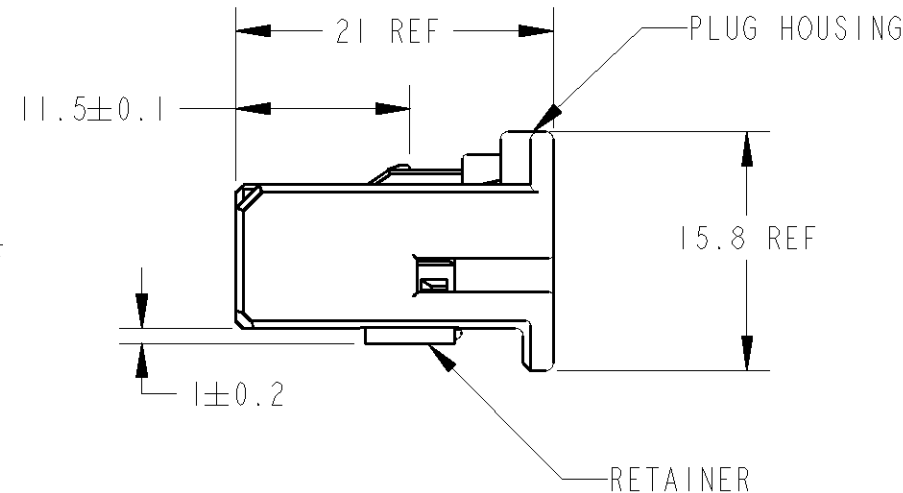
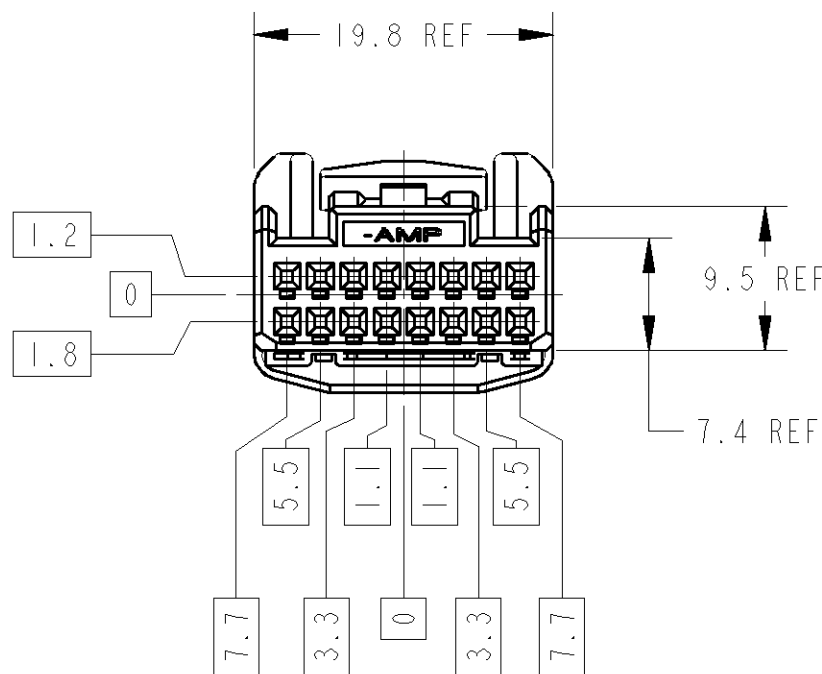
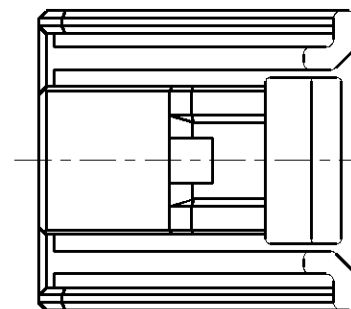


TABLE-1

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
16	1318382

TABLE-2

		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/CAVUS/AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

PAPER BOX ダンボール	PLASTIC BAG ビニール袋	BLACK	1318386-2
PAPER BOX ダンボール	PLASTIC BAG ビニール袋	NATURAL	1318386-1
OUTER 外装	INNER 内装	COLOR	PART NUMBER


PACKING STYLE

梱包形態

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
4. INSTRUCTION SHEET NO : 411-5928
5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
6. APPLIED TERMINAL : SEE TABLE -2
7. RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナーを仮止して出荷する
2. 仮係止時リテーナー突起がハウジングの外側に出ていること
3. リテーナーの仮係止保持力は 20N 以上
4. 取扱い説明書 NO : 411-5928
5. 嵌合相手型番は TABLE -1参照
6. 適用端子は TABLE -2参照
7. リテーナーはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: ㎜MATERIAL
材料

PBT

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差 = ± 0.3

0-PLC	±
1-PLC	±0.5
2-PLC	±0.13
3-PLC	±0.013
4-PLC	±0.000
ANGLES	±3'00"

FINISH
仕上

NATURAL

DWN Y. NOGUCHI 10MAR00

CHK N. SAI 10MAR00

APVD N. SAI 10MAR00

PRODUCT SPEC

製品規格

108-5668

APPLICATION SPEC

取付適用規格

114-5250

WEIGHT

2.78 g

CUSTOMER DRAWING

TE

TE Connectivity

025 SERIES 16POSITION
PLUG HOUSING ASSEMBLY

SIZE

A3

CAGE CODE

00779

DRAWING NO

C-1318386

RESTRICTED TO

REV B2

SCALE

5:1

SHEET

1

OF

1

REV

B2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318386-2](#)