


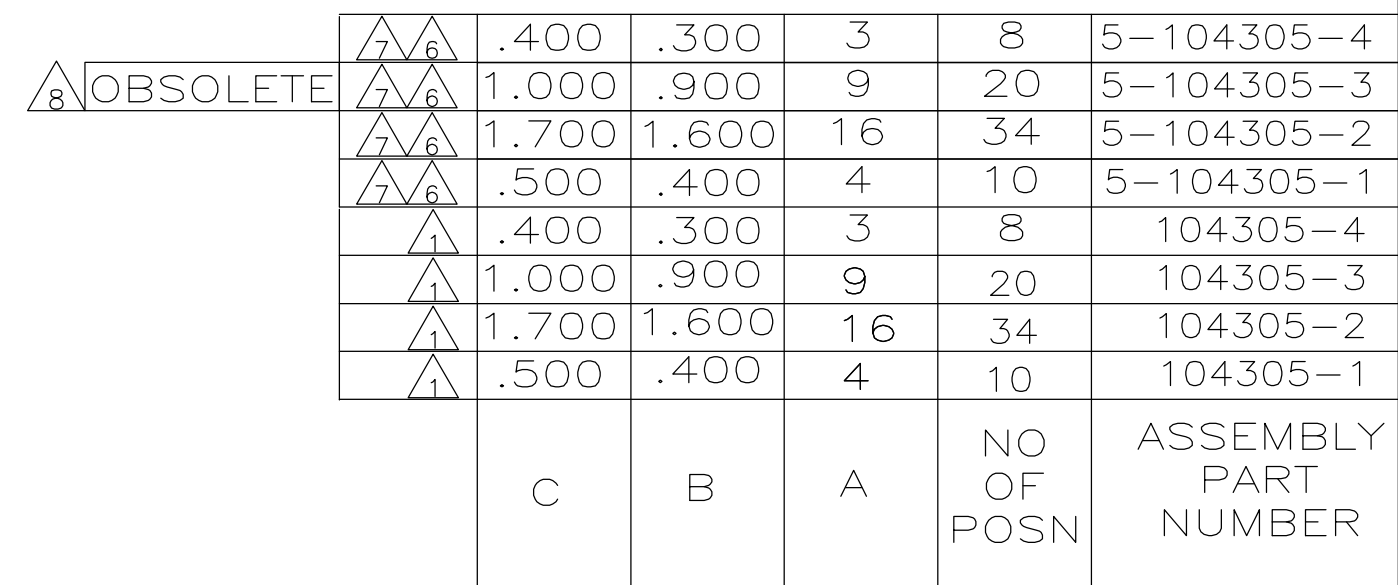

- 1 .000050 MIN W.E. #1 GOLD ALLOY IN CONTACT AREA, .000050–.000100 TIN–LEAD IN AREA D, ALL OVER .000050 NICKEL.
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 TOLERANCE NON–CUMALATIVE
- 4 USE WITH 22–26 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 5 CONTACT IDENTIFICATION NUMBER "2" LOCATED IN THIS AREA.
- 6 .000050 MIN W.E. #1 GOLD ALLOY IN CONTACT AREA, .000050 – .000100 TIN IN AREA D, ALL OVER .000050 NICKEL.
- 7 ROHS 2002/95/EC COMPLIANT
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL		11-20-87		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK P de Jong		11-20-87			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		PRODUCT SPEC		RECEPTACLE ASSY, AMPMODU, MASS TERMINATION, DBL ROW, .100 X .100 CL, #22-#26 AWG WIRE	
				APPLICATION SPEC			
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK CONTACTS: PHOS BRONZE		FINISH		WEIGHT		RESTRICTED TO	
SEE TABLE				-		-	
CUSTOMER DRAWING				SIZE		CAGE CODE	
				A2		00779	
				DRAWING NO		REV	
				C-104305		1	
				SCALE		SHEET	
				4:1		1 OF 1	
						REV	
						1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104305-4](#)