

SPECIFICATION CONTROL DRAWING

55PC1224

TITLE

TWO CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date

1-15-93

Revision


A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0214

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

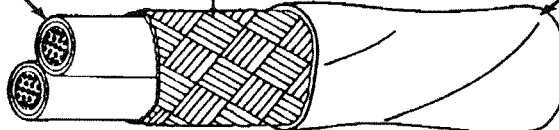

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1224-26-*	26	38	.0050	.0065	.096	.100	.104	7.62	8.02
55PC1224-24-*	24	38	.0050	.0065	.105	.109	.113	9.34	9.75
55PC1224-22-*	22	38	.0055	.0070	.118	.122	.127	12.02	12.50
55PC1224-20-*	20	38	.0055	.0070	.135	.139	.144	16.02	16.56
55PC1224-18-*	18	38	.0055	.0070	.154	.158	.163	21.57	22.25
55PC1224-16-*	16	38	.0060	.0075	.169	.174	.179	26.21	26.96

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red and blue component wires;
white jacket: 55PC1224-22-2/6-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
(415) 361 3333 TWX 910 373 1728

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[55PC1224-24-6/9-9CS3269](#) [55PC1224-24-6/9-9CS3071](#) [55PC1224-24-6/9-9](#) [55PC1224-20-2/6-9CS2502](#)
[55PC1224-24-2/6-9-F940](#) [55PC1224-24-2/6-9CS2502](#)