
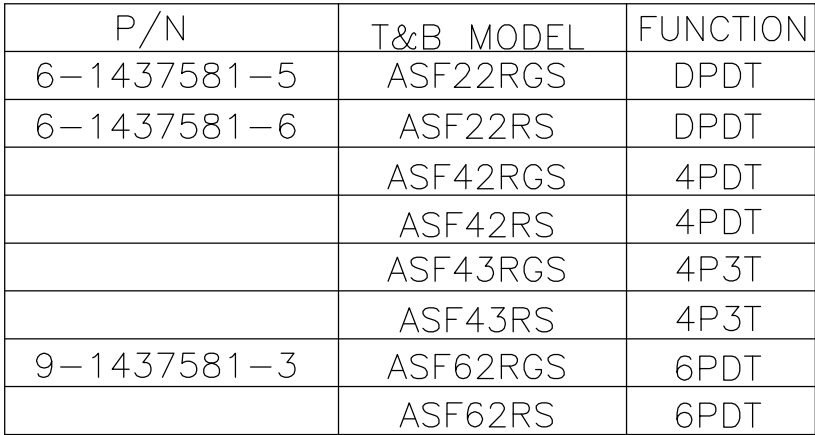



4805 (3/11)

D

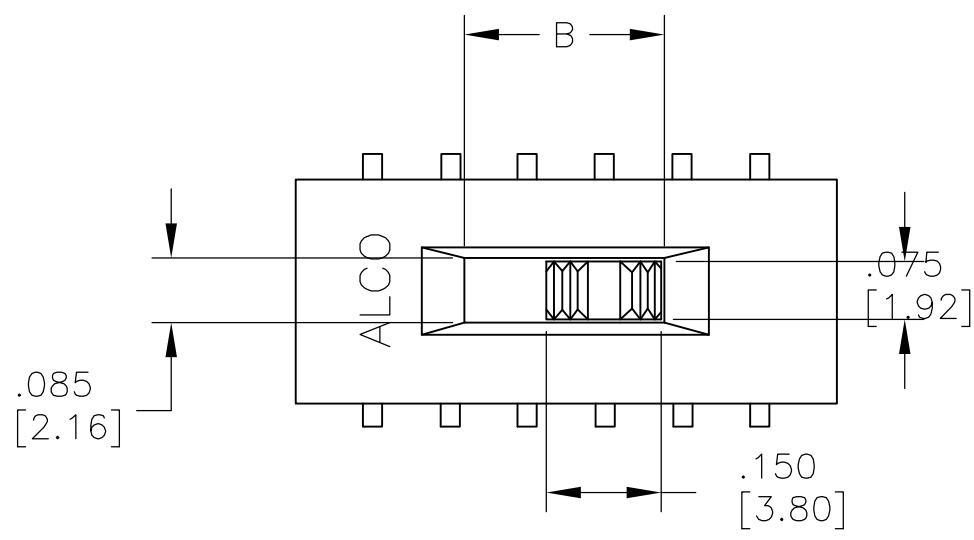


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

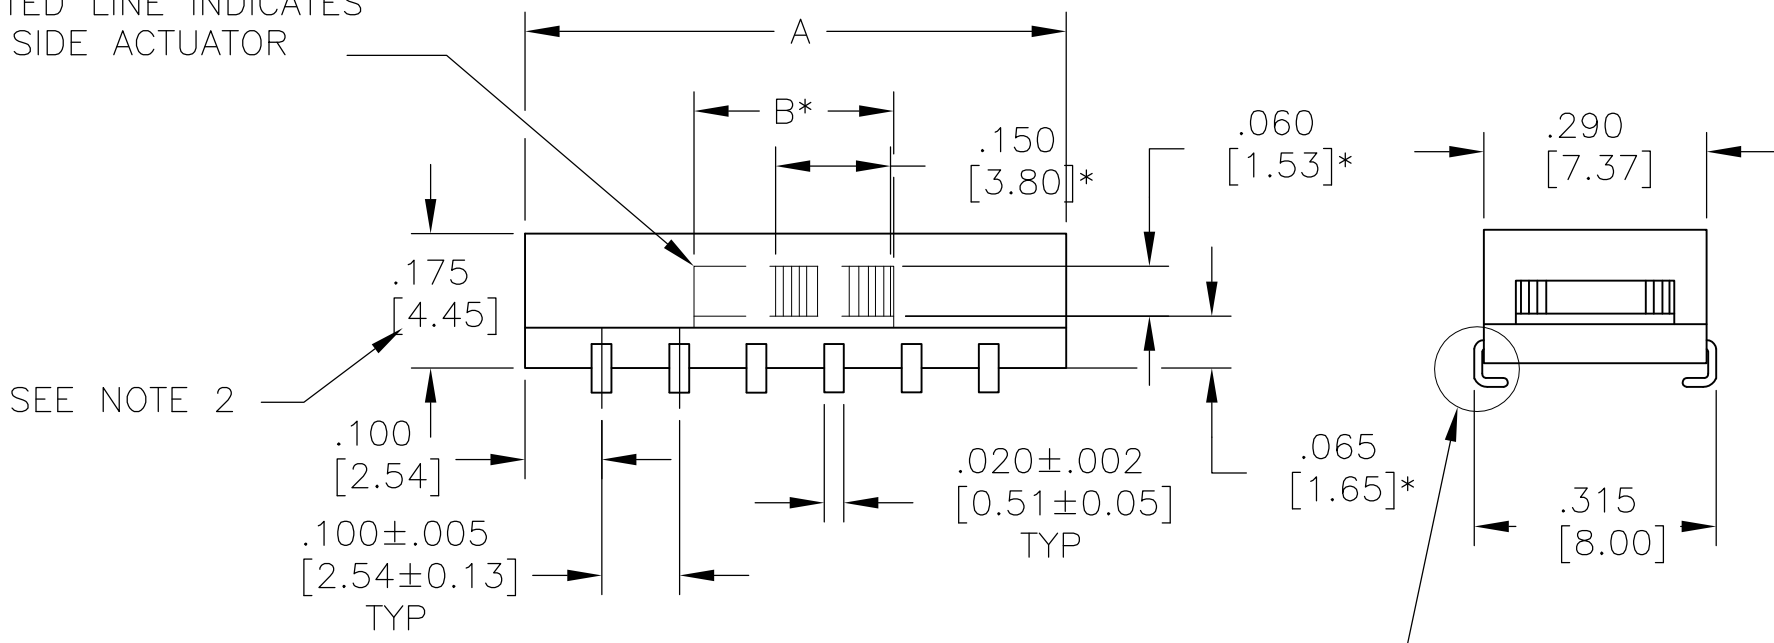


ASE

SEE NOTE A

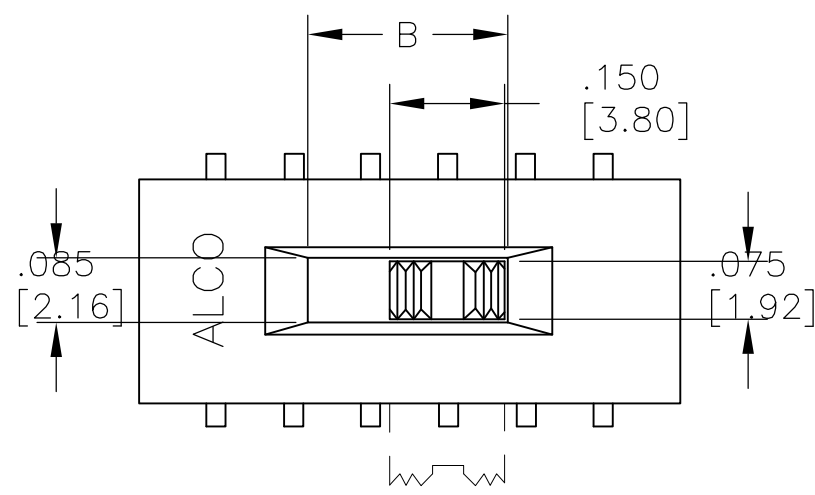


* SIDE ACTUATOR ONLY.

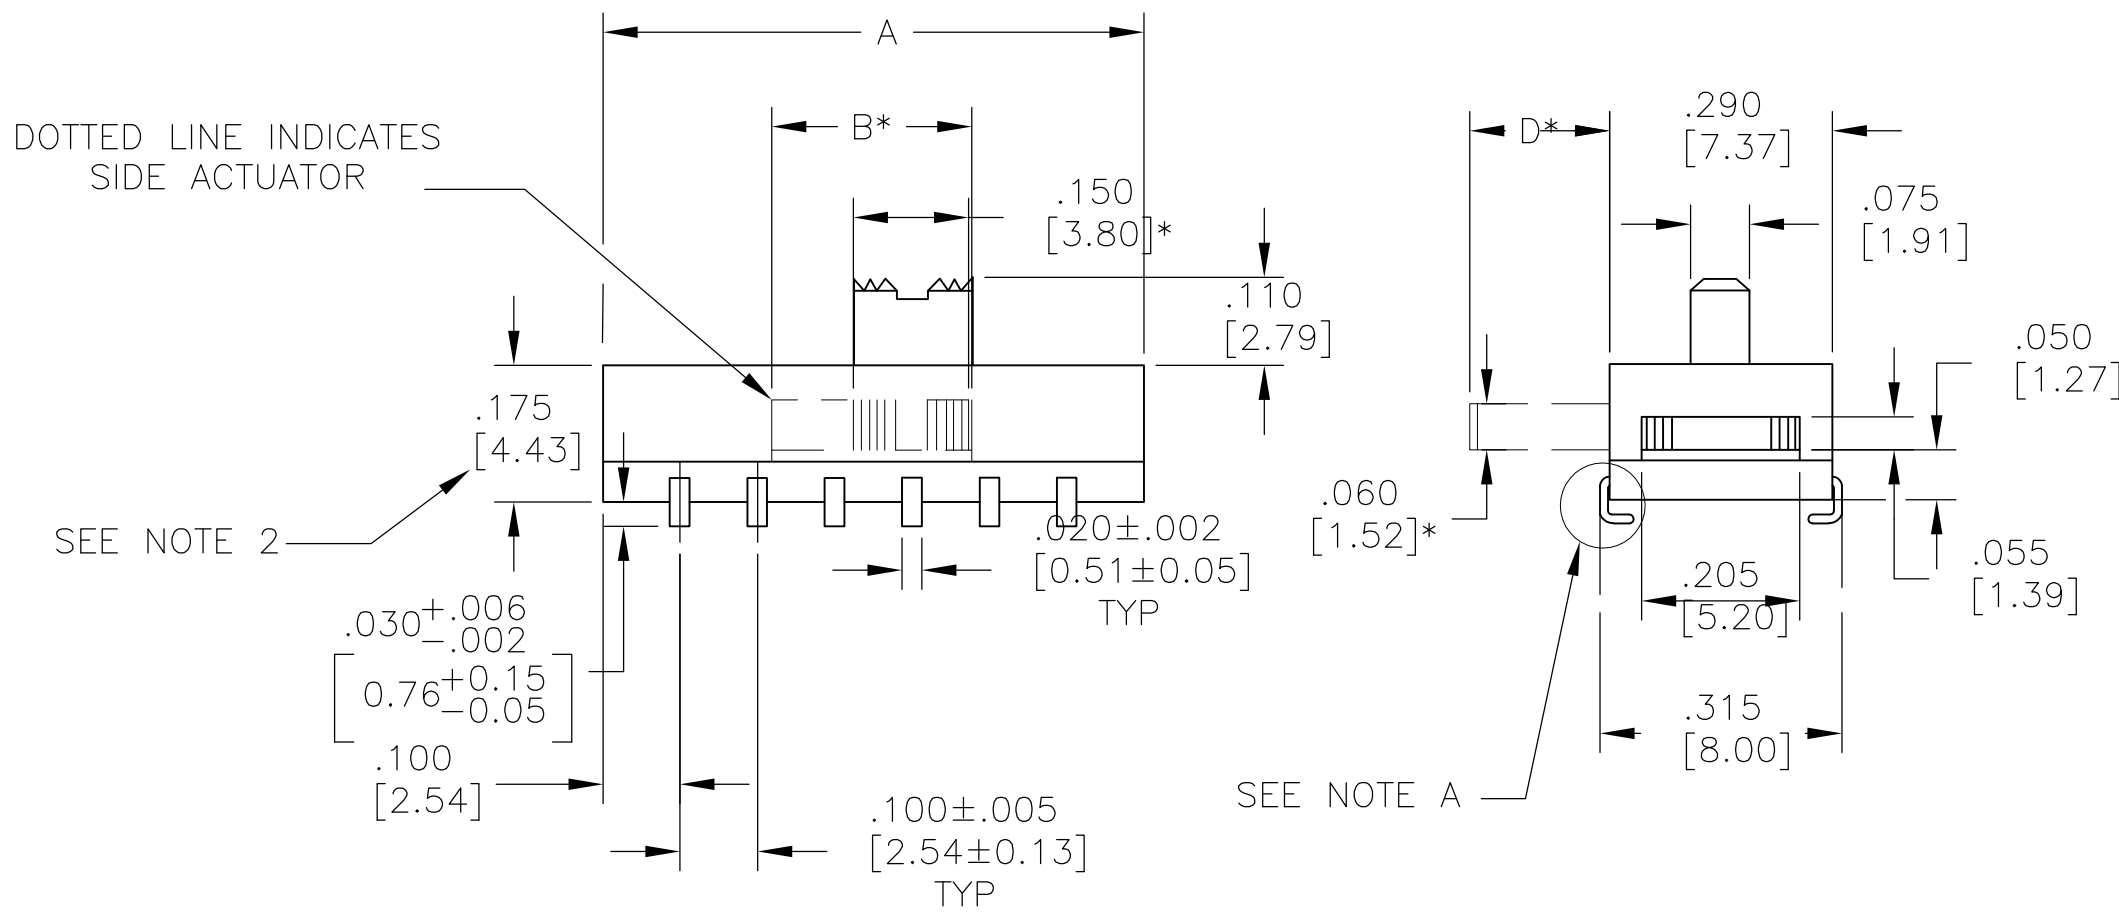

ASE


SEE NOTE A

REVERSE "L" TYPE SURFACE MOUNT

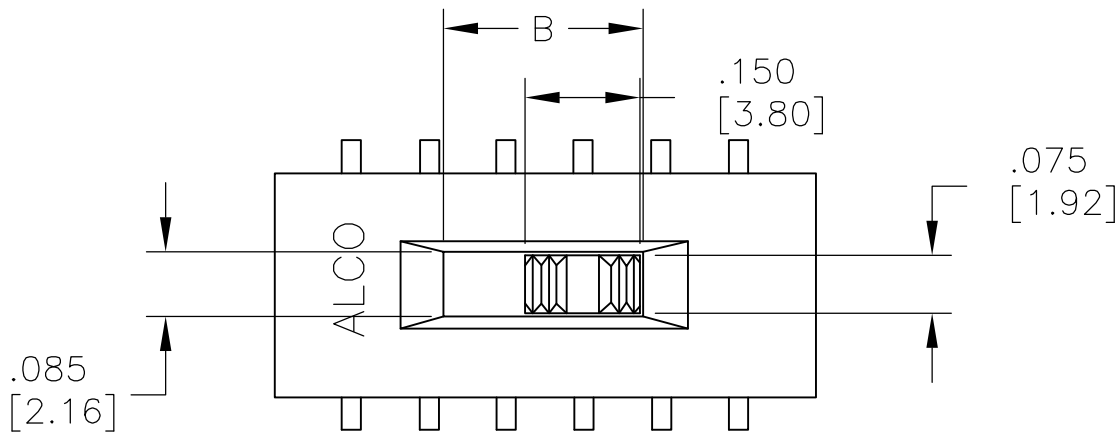


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

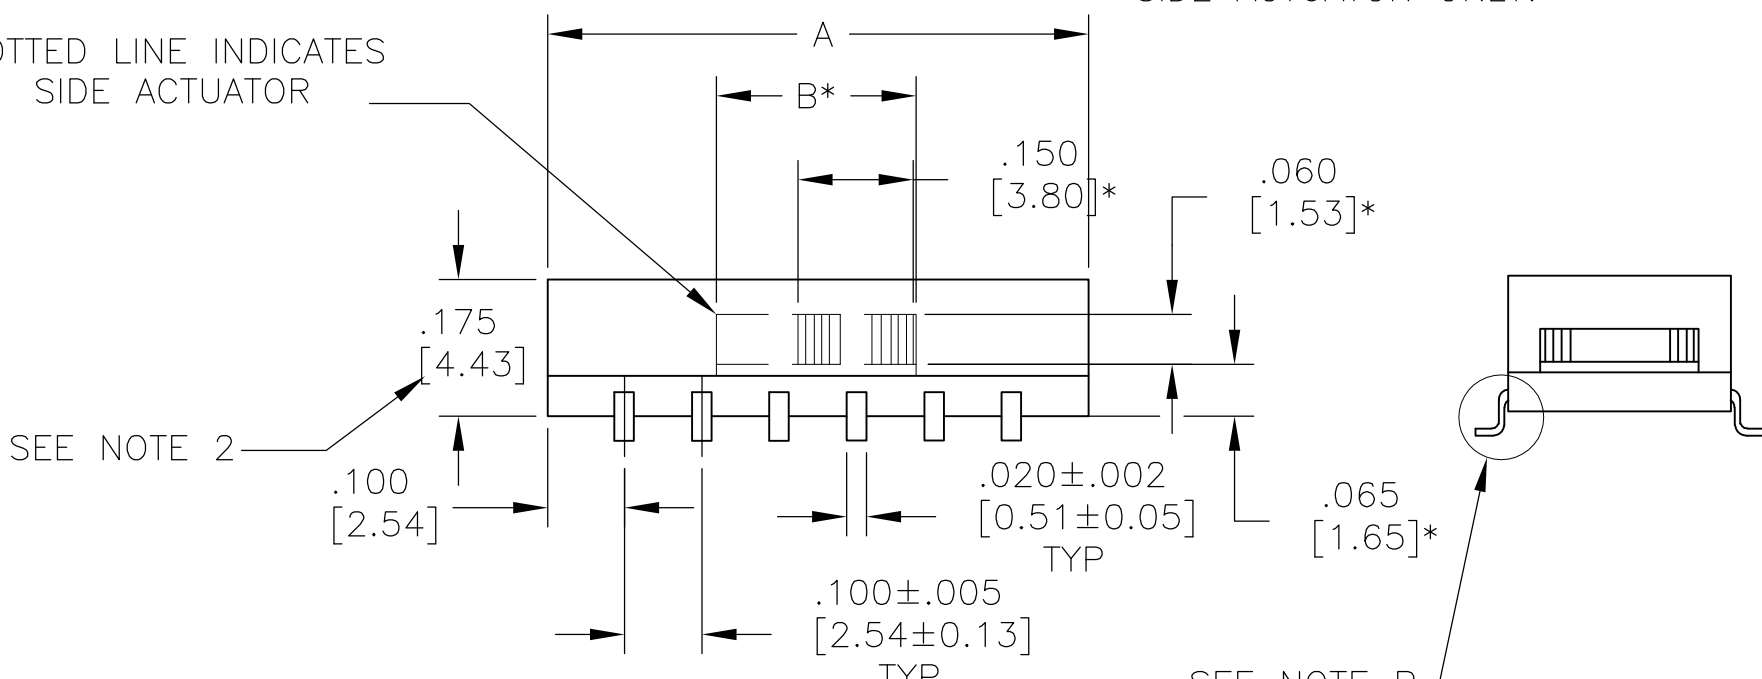


ASF

SEE NOTE B

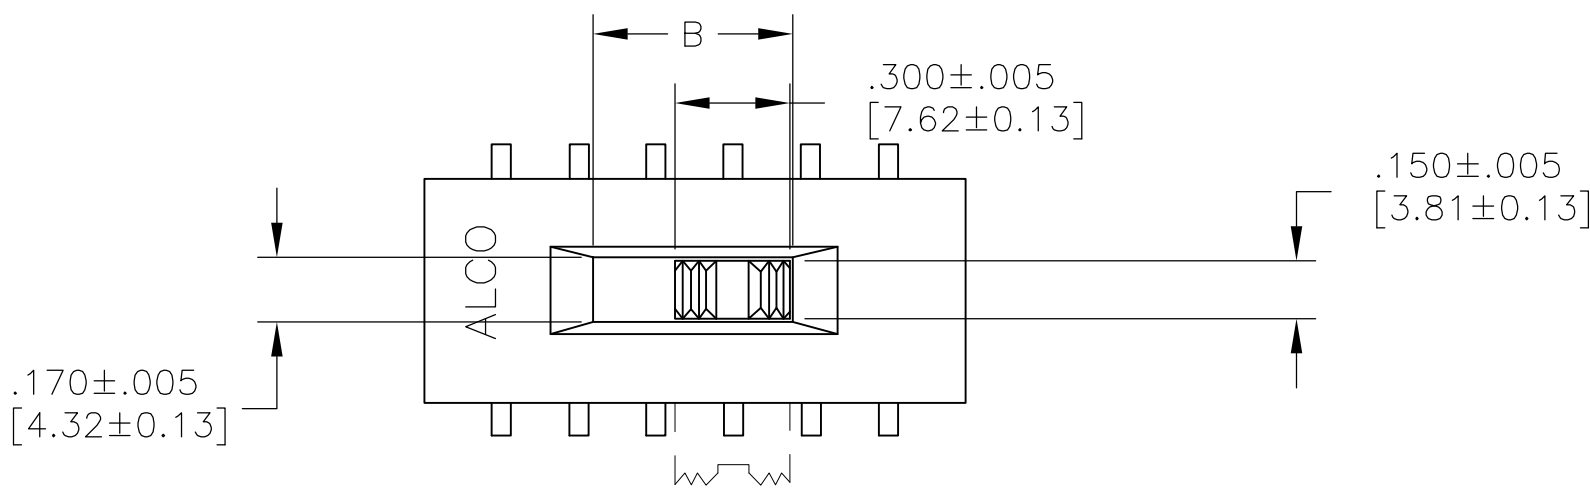



* SIDE ACTUATOR ONLY.

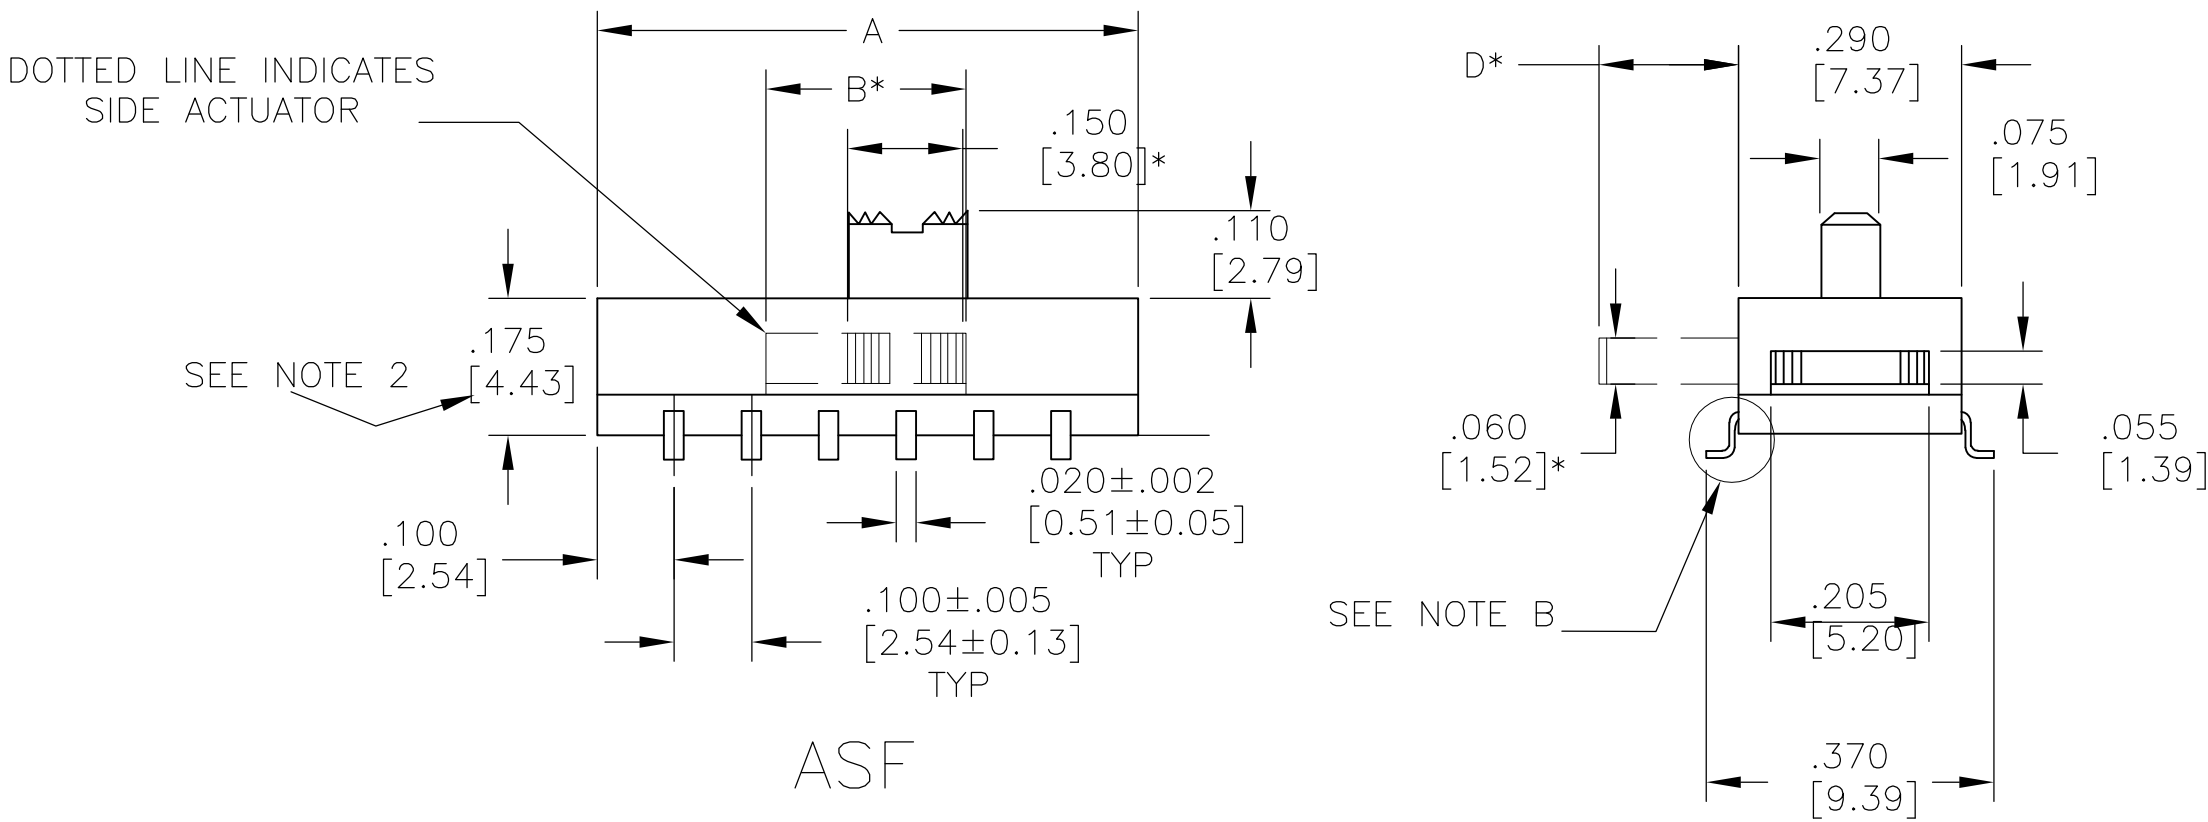

ASF

SEE NOTE B

"L" TYPE SURFACE MOUNT

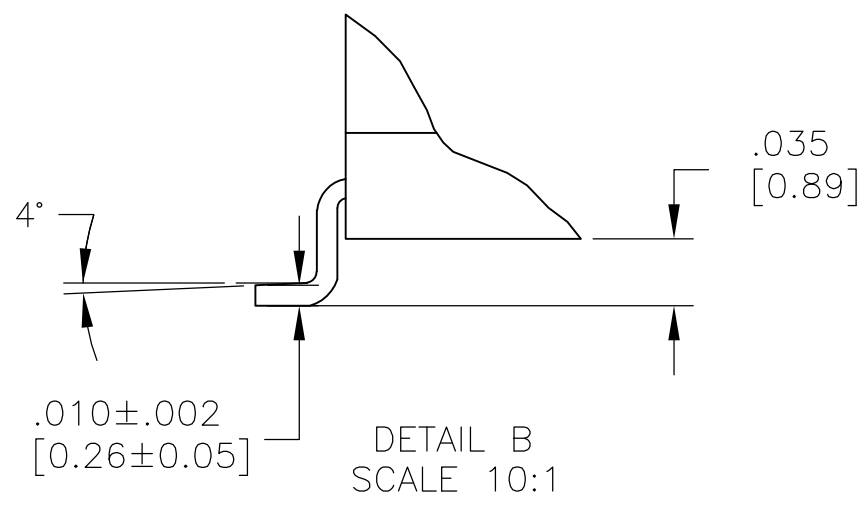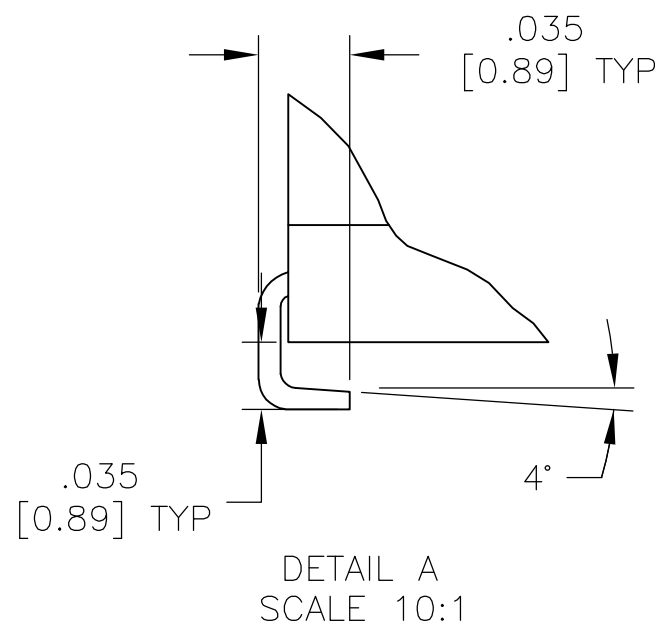

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	12JAN04	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK —	—		
	0. PLC	±	—	PRODUCT SPEC —	NAME SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT —
	1. PLC	±	—		
	2. PLC	±	—		
	3. PLC	±	—		
	4. PLC	±	0.010 [0.25]	APPLICATION SPEC —	SIZE A1
	ANGLES	±	1°		
MATERIAL SEE SPECIFICATIONS		FINISH —	—	WEIGHT —	CAGE CODE 00779
		DRAWING NO. 1437581-2		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 2
				REV K2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1437581-7](#)