

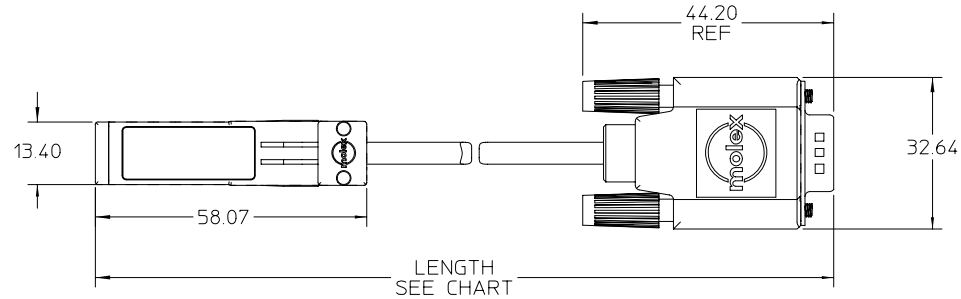


73929

WIRING DIAGRAM			
SFP		DB-9	
PIN	SIGNAL	PIN	SIGNAL
19	Tx-	9	Rx-
18	Tx+	5	Rx+
13	Rx+	1	Tx+
12	Rx-	6	Tx-




SFP NOTES:

1. MATERIALS

BACKSHELLS - NICKEL PLATED ZINC
LATCH - GLASS FILLED POLYCARBONATE
PCB - FR-4
RIVETS - TIN PLATED STEEL

2. IMPEDANCE MATCHING SFP (100 OHMS) TO DB-9 (150 OHMS)

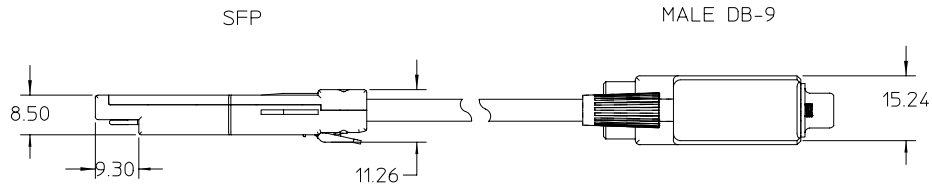


DB-9 NOTES:

1. MATERIALS

CONTACTS - GOLD PLATED BRASS
SHIELD - TIN PLATED STEEL
BOOT - BLACK PVC
JACKSCREWS

SCREW - STEEL
HEAD - PVC

2. CHARACTERISTIC IMPEDANCE 150 ± 10 OHMS MEASURED DIFFERENTIAL

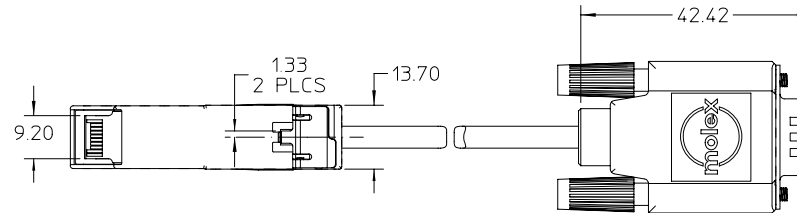

PART NUMBER	LENGTH
73929-1001	1 M ± 0.05 M
73929-1002	3 M ± 0.07 M
73929-1003	5 M ± 0.08 M
73929-1005	2 M ± 0.06 M
73929-1006	4 M ± 0.07 M

CABLE NOTES:

- CHARACTERISTIC IMPEDANCE 150 ± 10 OHMS MEASURED DIFFERENTIAL
- SEE MOLEX DRAWINGS SD-71153-7*** FOR FURTHER DETAILS

EC NO: UDT20020803 DRWN: DSLEWIS 2002/03/08 CHK: DDVE 2002/02/12 APPR: DDVE 2002/02/14	QUALITY SYMBOLS ▽ - 0 C - 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
				mm	INCH	DIMENSION STYLE		TITLE			
			4 PLACES	± ---	± ---	MM ONLY		SFP PLUG TO MALE DB-9 FIBRE CHANNEL (150 OHM) CABLE ASSEMBLY			
			3 PLACES	± ---	± ---	DRAWN BY DATE					
			2 PLACES	± 0.25	± ---	DSL 2001/12/13		MOLEX MOLEX INCORPORATED			
			1 PLACE	± 0.3	± ---	CHECKED BY DATE					
			ANGULAR ± 2 °			DLD 2001/12/17		MATERIAL NO 739291001 DOCUMENT NO SD-73929-100 SHEET NO 1 OF 1			
			DRAFT WHERE APPLICABLE			APPROVED BY DATE					
			MUST REMAIN WITHIN DIMENSIONS			DLD 1002/12/17		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
A	REV		B								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

73929-1005