


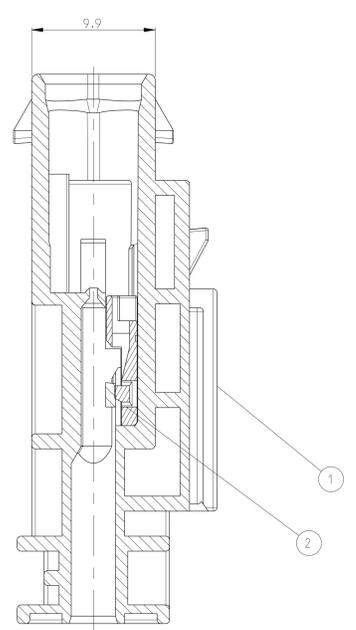


SHOWN 1-1564559-1

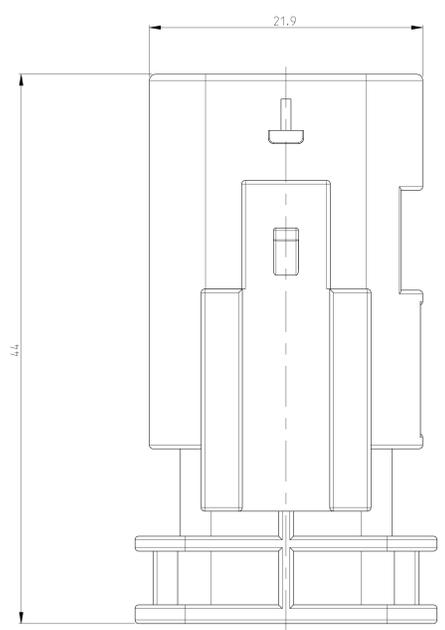


2:1

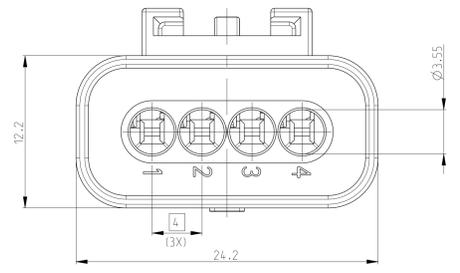


H-H

RETAINER IN PRE LOCKED POSITION
Kontaktsicherung in Vorraststellung

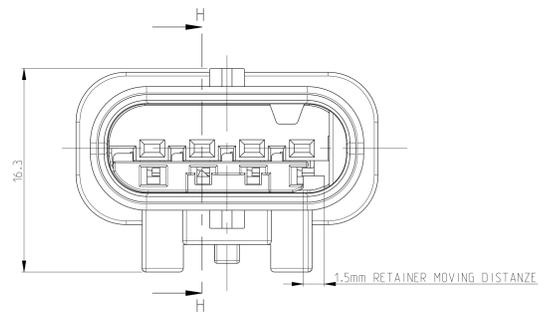


RETAINER IN FINAL LOCKED POSITION
2. Kontaktsicherung in Endraststellung




RETAINER MOVING DIRECTION
2. Kontaktsicherung Verschiebeweg


CODINGS 2:1




A 1-1564559-1
(BLACK)
1-1564559-4
(YELLOW FOR GM)




B 2-1564559-1
(GREY)
2-1564559-4
(YELLOW FOR GM)



C 3-1564559-1
3-1564559-4
(YELLOW FOR GM)




D 4-1564559-1






Z 5-1564559-1

SHOWN 1-1564559-2




2:1

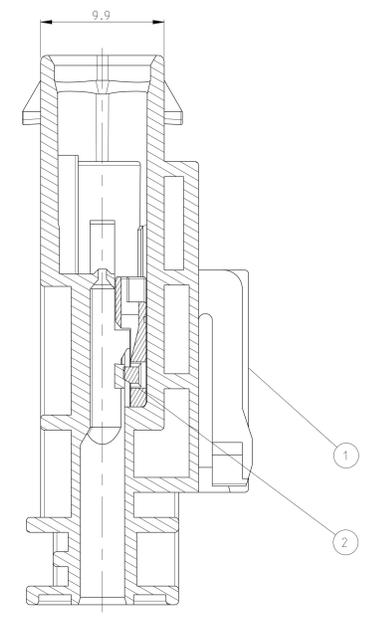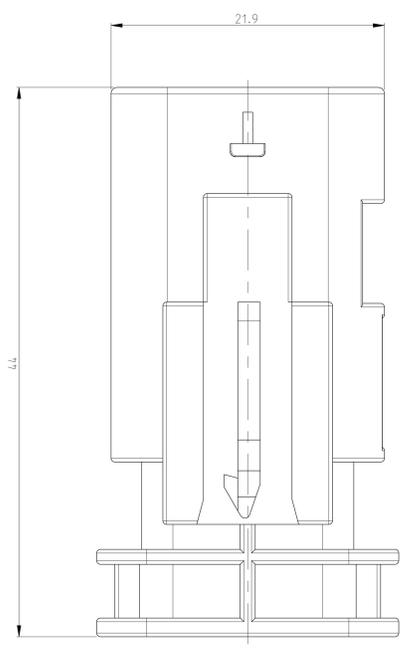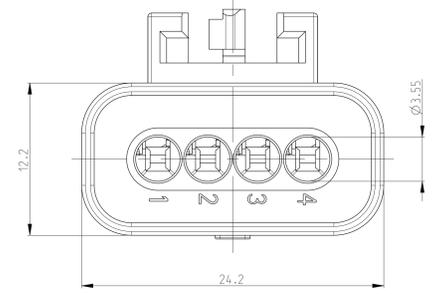


H-H

RETAINER IN PRE LOCKED POSITION
Kontaktsicherung in Vorraststellung

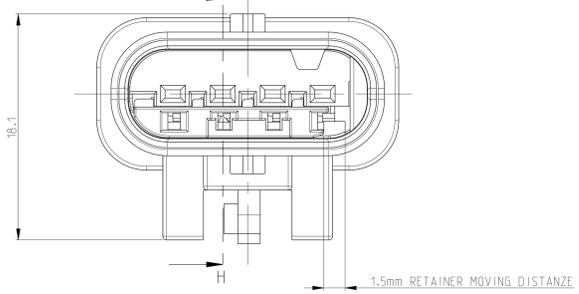


RETAINER IN FINAL LOCKED POSITION
2. Kontaktsicherung in Endraststellung




RETAINER MOVING DIRECTION
2. Kontaktsicherung Verschiebeweg

REV	DATE	DESCRIPTION	BY	CHK	APPD
A4	16APR2011	PCN-E-11-008327		MT	HR
A5	06OCT2006	PCN-E-14-014884		MT	HR


CODINGS 2:1




A 1-1564559-2
(BLACK)




B 2-1564559-2
(GREY)



C 3-1564559-2



D 4-1564559-2



Z 5-1564559-2

TE-PN TERMINALS	WIRE RANGE	TE-PN SINGLE WIRE SEAL	TE-PN BLIND PLUG
2141868	0.08 - 0.22mm ²	967067-2	967056-1
1718758	0.25 - 0.35mm ²	967067-2	
1718760	0.5 - 0.75mm ²	967067-1	
1718762	1mm ²	967067-1	

TERMINAL TE-APPLICATION SPEC.: 114-18464.

TE SUITABLE FEMALE HSG. PASSENDE BUCHSENGEH.	TE- Bestell-Nr. ORDER-NO.	ASSY REV. CODE	Benennung TITLE	QTY	Benennung Einzelteil TITLE	Werkstoff MATERIAL	Oberflaeche/Farbe SURFACE/COLOUR	Pos. ITEM
	5-1564559-2	A	Z	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
	4-1564559-2	A	D	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	schwarz/BLACK	1a
	3-1564559-2	A	C	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
	2-1564559-2	A	B	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	schwarz/BLACK	1c
	1-1564559-2	A	A	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
	1-1670918-2	A	A	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	schwarz/BLACK	1a

3-1670918-1	3-1564559-4	A	C	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
2-1670918-1	2-1564559-4	A	B	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PA66-GF35	violett/VIOLET	2
1-1670918-1	1-1564559-4	A	A	1	Kontaktsicherung RETAINER	PBT-GF30	gelb/YELLOW	1a
	5-1564559-1	A	Z	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	gelb/YELLOW	1a
	4-1564559-1	A	D	1	Kontaktsicherung RETAINER	PA66-GF35	schwarz/BLACK	1c
	3-1564559-1	A	C	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PA66-GF35	violett/VIOLET	2
	2-1670918-1	A	B	1	Kontaktsicherung RETAINER	PBT-GF30	schwarz/BLACK	1c
	1-1670918-1	A	A	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PA66-GF35	violett/VIOLET	2
	1-1564559-1	A	A	1	Kontaktsicherung RETAINER	PBT-GF30	schwarz/BLACK	1a

TE SUITABLE FEMALE HSG. PASSENDE BUCHSENGEH.	TE- Bestell-Nr. ORDER-NO.	ASSY REV. CODE	Benennung TITLE	QTY	Benennung Einzelteil TITLE	Werkstoff MATERIAL	Oberflaeche/Farbe SURFACE/COLOUR	Pos. ITEM
	3-1670918-1	A	C	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
	2-1670918-1	A	B	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	gelb/YELLOW	1c
	1-1670918-1	A	A	1	Kontaktsicherung RETAINER	PA66-GF35	violett/VIOLET	2
	1-1564559-1	A	A	1	Stiftgehäuse 4pol. MALE HOUSING 4POS.	PBT-GF30	schwarz/BLACK	1a

REGRIND MAX. 25%

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 07JUL2008
 DIMENSIONS: 0 PFC 00.5, 1 PFC 00.5, 2 PFC 00.5, 3 PFC 00.5, 4 PFC 00.5, 5 PFC 00.5, 6 PFC 00.5, 7 PFC 00.5, 8 PFC 00.5, 9 PFC 00.5, 10 PFC 00.5
 MATERIAL: 000779
 FINISH: 6.76g
 WEIGHT: 6.76g
 CUSTOMER DRAWING
 DATE: 07JUL2008
 CH. NUMBER: 08JUL2008
 PRODUCT SPEC: 108-94.177-1
 APPLICATION SPEC: 114-18910-1
 SCALE: 6.76g
 DRAWING NO: 114-18910-1
 SHEET: 1 OF 1
 REV: A5
STE TE Connectivity
 MALE HOUSING, 4Pos., MCON 1.2 SEALED TOP / SIDE LATCH
 Stiftgehäuse, 4pol., MCON 1.2 gedichtet
 A0 00779 C=1564559

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1564559-4](#)