


# RD ※D SERIES RIGHT-ANGLE TYPE CONNECTORS

## General

The RD※D Series use a molded one-piece design for parallel mounting on a PCB. Designed to be directly connected to the circuits in PCBs, the RD※D Series is suitable for labor-saving in connection work and en-

hancing the reliability of wiring.

9, 15, 25, and 37-contact models available. (37-contact):Female connector only

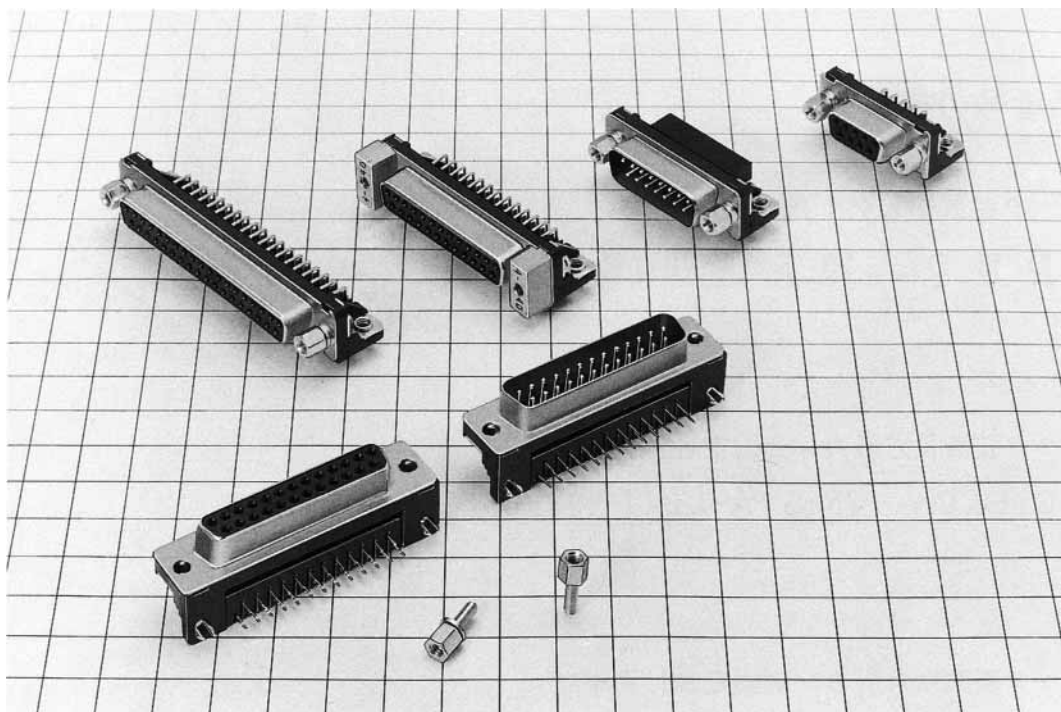

## Features

- (1) Compact and sturdy due to a metal shell.
- (2) Simple construction of RD type single mold.
- (3) Offers direct parallel mounting on PCBs in high density and easily connectable to a cable plug.
- (4) Gold plated for contact area and mounting area.
- (5) A wide variety of combinations available, such as dip soldering (HD), crimping (CD), and ribbon IDC termination (FD).
- (6) Uses insulation of highly heat-resistant and chemical-resistant UL synthetic resin.
- (7) Meets your application requirements with a variety of accessories.

## Application

Most suitable for modems in communications equipment such as computers, peripherals and terminals,

control equipment, measuring instruments, and export equipment.

## Electrical and Environmental

Electrical and Environmental Characteristics	
Current capacity	3A
Rated voltage	350V AC
Insulation resistance	5000M $\Omega$ min. at 500V DC
Contact resistance	25m $\Omega$ max. at 100mA AC
Withstand voltage	1250Vrms Ac for 1 minute

Material and finish		
Shell	Steel	Nickel plating
Insulator	PBT※	Black
Contacts	Phosphor bronze	Nickel plating + Gold plating

※UL94V-0

## Ordering Informations

### ● Lock-free Type

RD	B	D	—	25	S	(4-40)	(55)
(1)	(2)	(3)		(4)	(5)	(9)	(8)

### ● Type with rectangular bracket to secure lock

RD	B	D	—	25	S	A—LN	(4-40)	(55)
(1)	(2)	(3)		(4)	(5)	(6)	(7)	(8)

### ● Type with hexagon bracket to secure lock


RD	B	D	—	25	S	A—LNA	(4-40)	(55)
(1)	(2)	(3)		(4)	(5)	(6)	(7)	(8)

### ● Lock retrofitting Type

RD	B	D	—	25	S	E1/M2.6	(55)
(1)	(2)	(3)		(4)	(5)	(6)	(8)

- (1) Model number symbol RD: D sublight-angle type
- (2) Shell size: E, A, B and C
- (3) Serial symbol by type of connector unit: D
- (4) Number of poles: 9, 15, 25 and 37
- (5) Terminal opening shape symbol  
S: female terminal P: male terminal
- (6) Substrate Mounting Configuration (grounding hardware configuration)  
No symbol M3×0.5  
A:  $\phi 3 \times 3.2$  pierced hole  
E: With simple lock pin to tack substrate (1.6-mm thick)  
E1/M2.6: locker-recipient screw M2.6 with simple lock pin to tack substrate (1.6-mm thick)
- (7) Lock Nuts  
Rectangular { LN: M2.6×0.45  
LN(4-40): No.4-40 UNC  
Hexagonal { LNA: M2.6×0.45  
LNA(4-40): No.4-40 UNC
- (8) Specification contents  
(55) : Nickel - plated shell
- (9) Type of mounting screws  
No symbol: M2.6×0.45  
(4-40): No.4-40 UNC

## Standard/No Insert



Metric thread



#4-40 thread

### Dimensions


No. of Pin	A	B	C <sub>1</sub>	C <sub>2</sub>	D	E
9	24.99	30.81	16.4	16.9	24.99	8.34
15	33.32	39.14	24.59	25.24	33.32	8.34
25	47.04	53.04	38.3	39.01	47.04	8.4
37	63.5	69.32	54.76	—	63.5	—



RDBD-25S (55)

Panel-mounting threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0312-3-55	9	RDED-9S (55)	YES
CL211-0315-1-55	15	RDAD-15S (55)	
CL211-0294-3-55	25	RDBD-25S (55)	
CL211-0318-0-55	37	RDCD-37S (55)	

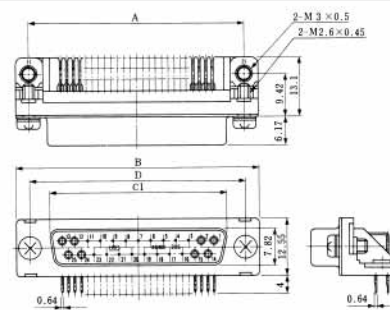

RDBD-25P (55)

Panel-mounting threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0475-8-55	9	RDED-9P (55)	YES
CL211-0496-8-55	15	RDAD-15P (55)	
CL211-0367-5-55	25	RDBD-25P (55)	

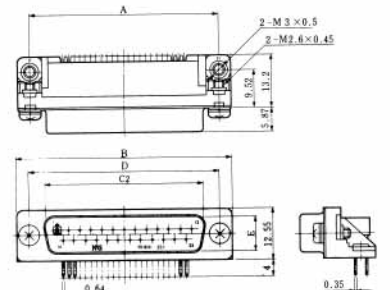

RDBD-25SA (55)

Panel-mounting threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes


HRS No	No. of Pin	Part No.	RoHS
CL211-0412-8-55	9	RDED-9SA (55)	YES
CL211-0413-0-55	15	RDAD-15SA (55)	
CL211-0297-1-55	25	RDBD-25SA (55)	

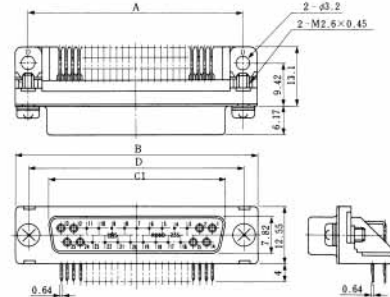

RDBD-25PA (55)

Panel-mounting threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes

HRS No	No. of Pin	Part No.	RoHS
CL211-0502-9-55	15	RDAD-15PA (55)	YES
CL211-0373-8-55	25	RDBD-25PA (55)	

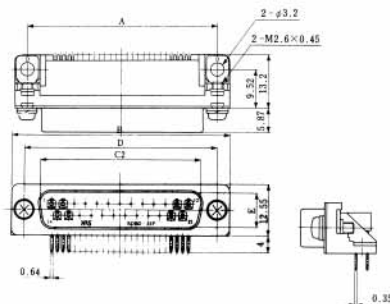





RDBD-25S (4-40) (55)

Panel-mounting threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0399-1-55	15	RDAD-15S (4-40) (55)	YES
CL211-0300-4-55	25	RDBD-25S (4-40) (55)	

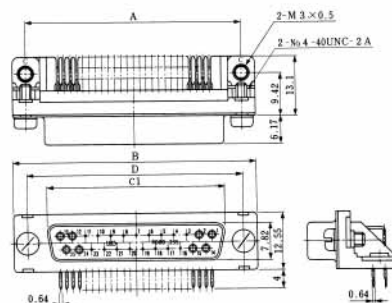

## Locking Device with Rectangular Mating Locking Base (LN Type)





Metric thread



#4-40 thread

### Dimensions




No. of Pin	A	B	C <sub>1</sub>	C <sub>2</sub>	D	E
9	24.99	30.81	16.4	16.9	24.99	8.34
15	33.32	39.14	24.59	25.24	33.32	8.34
25	47.04	53.04	38.3	39.01	47.04	8.4
37	63.5	69.32	54.76	—	63.5	—



RDBD-25S-LN (55)

Rectangular mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5




HRS No	No. of Pin	Part No.	RoHS
CL211-0313-6-55	9	RDED-9S-LN (55)	YES
CL211-0316-4-55	15	RDAD-15S-LN (55)	
CL211-0295-6-55	25	RDBD-25S-LN (55)	
CL211-0319-2-55	37	RDCD-37S-LN (55)	

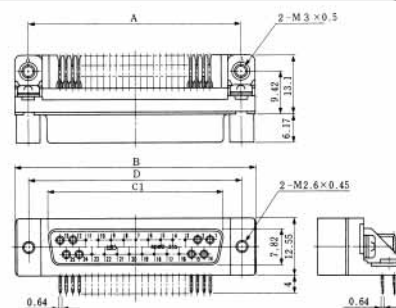

RDBD-25P-LN (55)

Rectangular mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5




HRS No	No. of Pin	Part No.	RoHS
CL211-0476-0-55	9	RDED-9P-LN (55)	YES
CL211-0497-0-55	15	RDAD-15P-LN (55)	
CL211-0368-8-55	25	RDBD-25P-LN (55)	

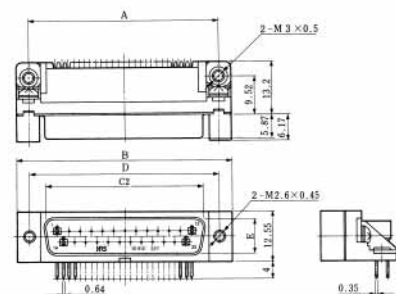

RDBD-25SA-LN (55)

Rectangular mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes


HRS No	No. of Pin	Part No.	RoHS
CL211-0415-6-55	9	RDED-9SA-LN (55)	YES
CL211-0389-8-55	15	RDAD-15SA-LN (55)	
CL211-0285-2-55	25	RDBD-25SA-LN (55)	
CL211-0416-9-55	37	RDCD-37SA-LN (55)	

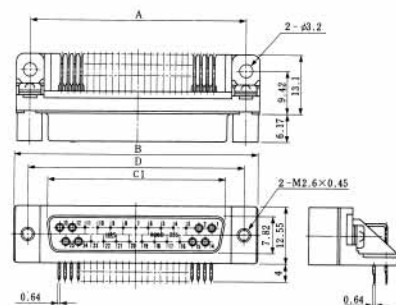


RDBD-25PA-LN (55)

Rectangular mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes

HRS No	No. of Pin	Part No.	RoHS
CL211-0374-0-55	25	RDBD-25PA-LN (55)	YES

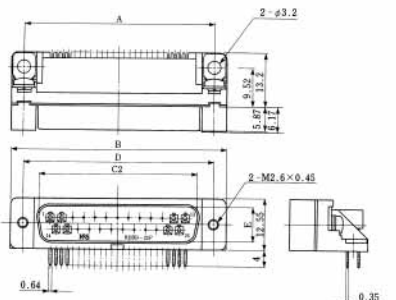





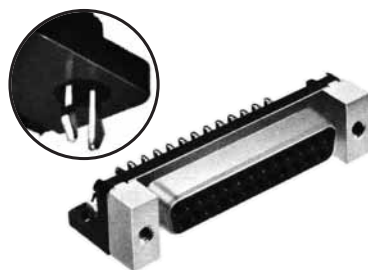

RDBD-25SE-LN (55)

Rectangular-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Fitted with a simple lock pin for temporary locking on PCB



HRS No	No. of Pin	Part No.	RoHS
CL211-0420-6-55	9	RDED-9SE-LN (55)	YES
CL211-0421-9-55	15	RDAD-15SE-LN (55)	
CL211-0293-0-55	25	RDBD-25SE-LN (55)	
CL211-0423-4-55	37	RDCD-37SE-LN (55)	

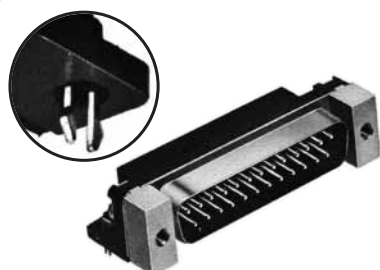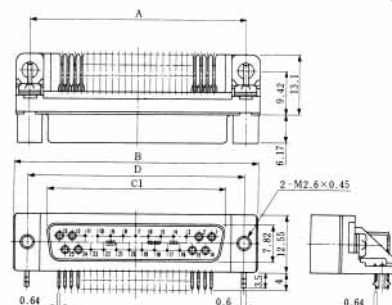

RDBD-25PE-LN (55)

Rectangular-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Fitted with a simple lock pin for temporary locking on PCB.



HRS No	No. of Pin	Part No.	RoHS
CL211-0491-4-55	9	RDED-9PE-LN (55)	YES
CL211-0509-8-55	15	RDAD-15PE-LN (55)	
CL211-0437-9-55	25	RDBD-25PE-LN (55)	

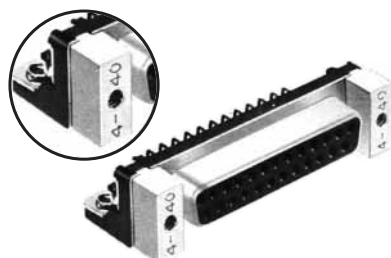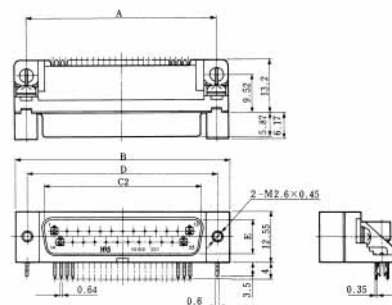

RDBD-25S-LN (4-40) (55)

Rectangular mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0401-1-55	9	RDED-9S-LN (4-40) (55)	YES
CL211-0301-7-55	25	RDBD-25S-LN (4-40) (55)	

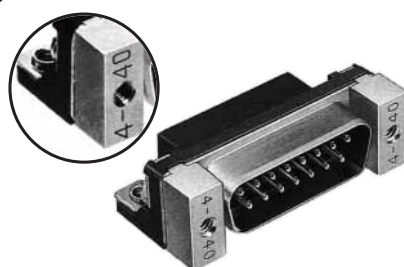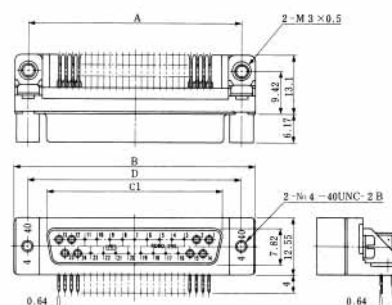

RDAD-15P-LN (4-40) (55)

Rectangular mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0479-9-55	9	RDED-9P-LN (4-40) (55)	YES
CL211-0500-3-55	15	RDAD-15P-LN (4-40) (55)	

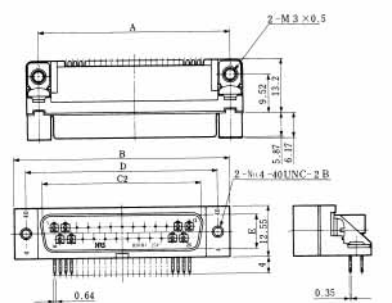


RDBD-25SA-LN (4-40) (55)

Rectangular mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): Through-holes


HRS No	No. of Pin	Part No.	RoHS
CL211-0407-8-50	15	RDAD-15SA-LN (4-40) (50)	YES
CL211-0304-5-55	25	RDBD-25SA-LN (4-40) (55)	
CL211-0408-0-55	37	RDCD-37SA-LN (4-40) (55)	

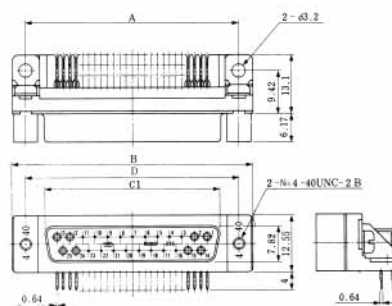

## Locking Device with Hexagonal-mating Locking Base (LNA Type)



Metric thread



#4-40 thread

### Dimensions



No. of Pin	A	B	C <sub>1</sub>	C <sub>2</sub>	D	E
9	24.99	30.81	16.4	16.9	24.99	8.34
15	33.32	39.14	24.59	25.24	33.32	8.34
25	47.04	53.04	38.3	39.01	47.04	8.4
37	63.5	69.32	54.76	—	63.5	—



RDBD-25S-LNA (55)

Hexagonal-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0314-9-55	9	RDED-9S-LNA (55)	YES
CL211-0317-7-55	15	RDAD-15S-LNA (55)	
CL211-0296-9-55	25	RDBD-25S-LNA (55)	
CL211-0320-1-55	37	RDCD-37S-LNA (55)	

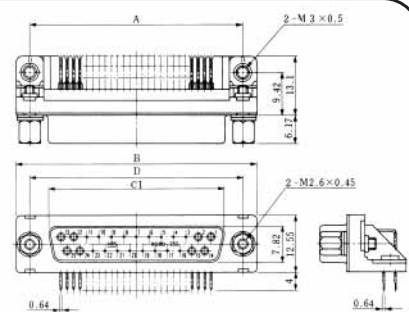

RDBD-25P-LNA (55)

Hexagonal-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): M3×0.5



HRS No	No. of Pin	Part No.	RoHS
CL211-0477-3-55	9	RDED-9P-LNA (55)	YES
CL211-0498-3-55	15	RDAD-15P-LNA (55)	
CL211-0369-0-55	25	RDBD-25P-LNA (55)	

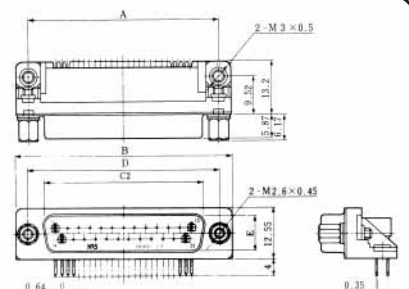

RDBD-25SA-LNA (55)

Hexagonal-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes


HRS No	No. of Pin	Part No.	RoHS
CL211-0409-3-55	9	RDED-9SA-LNA (55)	YES
CL211-0410-2-55	15	RDAD-15SA-LNA (55)	
CL211-0299-7-55	25	RDBD-25SA-LNA (55)	
CL211-0411-5-55	37	RDCD-37SA-LNA (55)	

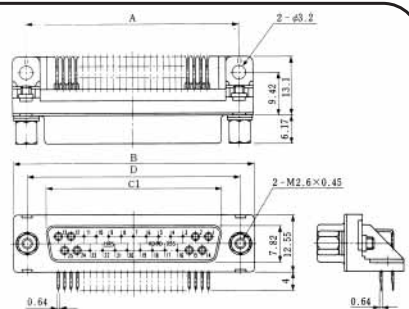


RDBD-25PA-LNA (55)

Hexagonal-mating threaded holes: M2.6×0.45 (metric)  
Ground terminal (PCB-mounting): Through-holes

HRS No	No. of Pin	Part No.	RoHS
CL211-0486-4-55	9	RDED-9PA-LNA (55)	YES
CL211-0504-4-55	15	RDAD-15PA-LNA (55)	
CL211-0375-3-55	25	RDBD-25PA-LNA (55)	

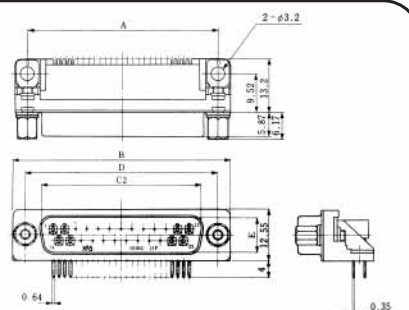




RDBD-25S-LNA (4-40)(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0404-0-55	9	RDED-9S-LNA (4-40) (55)	YES
CL211-0384-4-55	15	RDAD-15S-LNA(4-40)(55)	
CL211-0302-0-55	25	RDBD-25S-LNA(4-40)(55)	
CL211-0405-2-55	37	RDCD-37S-LNA(4-40)(55)	

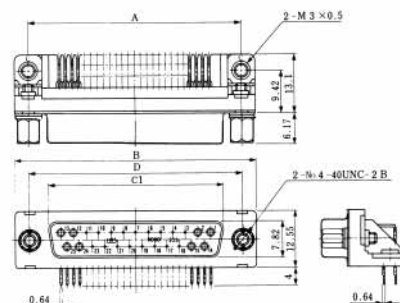

RDBD-25P-LNA (4-40)(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): M3×0.5




HRS No	No. of Pin	Part No.	RoHS
CL211-0480-8-55	9	RDED-9P-LNA (4-40) (55)	YES
CL211-0501-6-55	15	RDAD-15P-LNA(4-40)(55)	
CL211-0372-5-55	25	RDBD-25P-LNA(4-40)(55)	

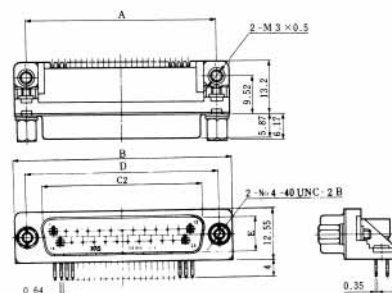

RDBD-25SA-LNA(4-40)(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): Through-holes


HRS No	No. of Pin	Part No.	RoHS
CL211-0417-1-55	9	RDED-9SA-LNA (4-40) (55)	YES
CL211-0305-8-55	25	RDBD-25SA-LNA(4-40)(55)	

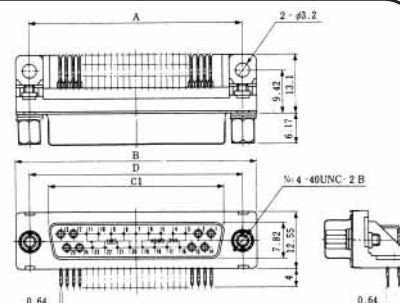

RDBD-25PA-LNA(4-40)(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
Ground terminal (PCB-mounting): Through-holes

HRS No	No. of Pin	Part No.	RoHS
CL211-0489-2-55	9	RDED-9PA-LNA (4-40) (55)	YES
CL211-0377-9-55	25	RDBD-25PA-LNA(4-40)(55)	

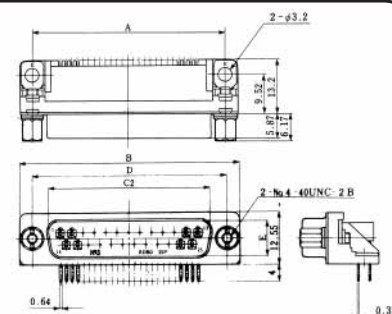







RDBD-25S-LNA(4-40)GP(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
 Ground terminal (PCB-mounting): M3×0.5


HRS No	No. of Pin	Part No.	RoHS
CL211-0458-9-55	15	RDAD-15S-LNA (4-40)GP(55)	
CL211-0459-1-55	25	RDBD-25S-LNA (4-40)GP(55)	YES
CL211-0460-0-55	37	RDCD-37S-LNA (4-40)GP(55)	

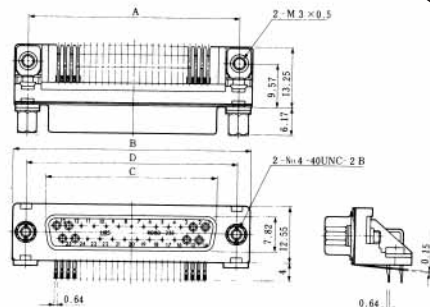

RDBD-25PLNA(4-40)GP2(55)

Hexagonal-mating threaded holes: No.4-40 UNC (inch)  
 Ground terminal (PCB-mounting): M3×0.5

HRS No	No. of Pin	Part No.	RoHS
CL211-0539-9-55	25	RDBD-25PLNA (4-40)GP2(55)	YES

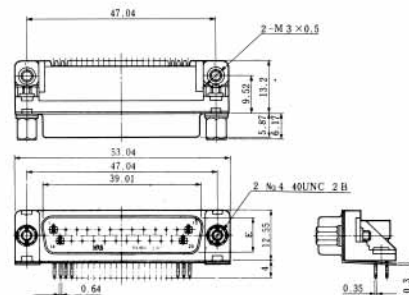

## Field-Mounting Locking Device



Male contact



Female contact

### Dimensions



No. of Pin	A	B	C <sub>1</sub>	C <sub>2</sub>	D
9	24.99	30.81	16.4	16.9	24.95
15	33.32	39.14	24.59	25.24	33.32
25	47.04	53.04	38.3	39.01	47.04
37	63.5	69.32	54.76	—	63.55



RDBD-25SE1/M2.6 (55)

Hexagonal mating screw: Not provided (Select from the following according to your application)  
Grounding device (PCB mounting part): With simple locking pin to temporarily lock PCB.  
Applicable PCB thickness: 1.6mm


HRS No	No. of Pin	Part No.	RoHS
CL211-5195-9-55	9	RDED-9SE1/M2.6 (55)	YES
CL211-5169-9-55	15	RDAD-15SE1/M2.6 (55)	
CL211-5197-4-55	25	RDBD-25SE1/M2.6 (55)	
CL211-5198-7-55	37	RDCD-37SE1/M2.6 (55)	

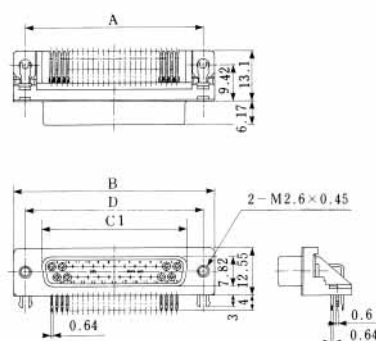

RDBD-25PE1/M2.6 (55)

Hexagonal mating screw: Not provided (Select from the following according to your application)  
Grounding device (PCB mounting part): With simple locking pin to temporarily lock PCB.  
Applicable PCB thickness: 1.6mm

HRS No	No. of Pin	Part No.	RoHS
CL211-5168-6-55	9	RDED-9PE1/M2.6 (55)	YES
CL211-5196-1-55	15	RDAD-15PE1/M2.6 (55)	
CL211-5170-8-55	25	RDBD-25PE1/M2.6 (55)	

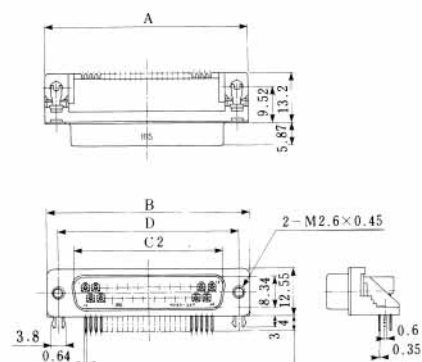


### ●Special mating locking screw Washer



RDG-LNA-W2

	HRS No	Part No.	No. of pin	Agreement and Thickness	RoHS
M2.6 × 0.45	CL211-5180-1	RDG-LNA	0	1.6~2.0	YES
	CL211-5181-4	RDG-LNA-W1	1	0.8~1.2	
	CL211-5182-7	RDG-LNA-W2	2	0~0.4	
M0.4-40UNS	CL211-5183-0	RDG-LNA (4-40)	0	1.6~2.0	
	CL211-5184-2	RDG-LNA (4-40)-W1	1	0.8~1.2	
	CL211-5185-5	RDG-LNA (4-40)-W2	2	0~0.4	

Note 1: Finished by nickel plating.  
2: Two screws are packed in one case.  
3: Since the grounding device attached to the connector is fixed temporarily, do not press the locking screw against the grounding device.




# SM Series (D SUB) Accessories

## Mis-insertion prevention pin




- Note 1: Can be used in the female RD, SD, HD series. For use in the CD series, built-in crimp terminals are required.
- Note 2: As a mating partner, use a male CD (crimp termination) series connector that allows the contact at the part corresponding to the mis-insertion prevention pin to be removed.

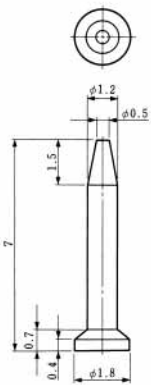


HRS No	Part No.	RoHS
CL211-0436-6	RDBD polarizing pin	YES

Note: Can also be used in the SD and HD series.


## Mounting Pattern (mm)

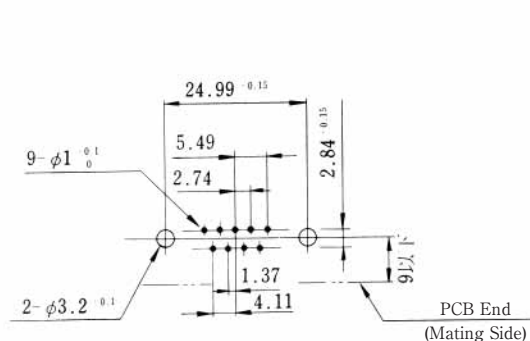


RDDE-9

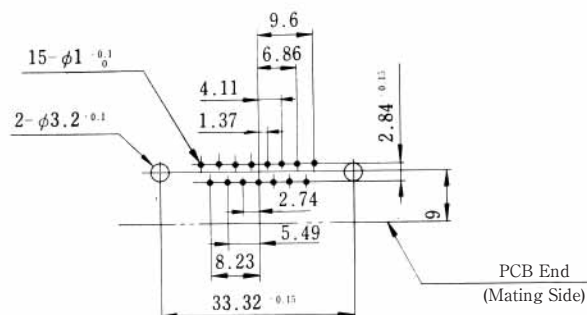

RDAD-15

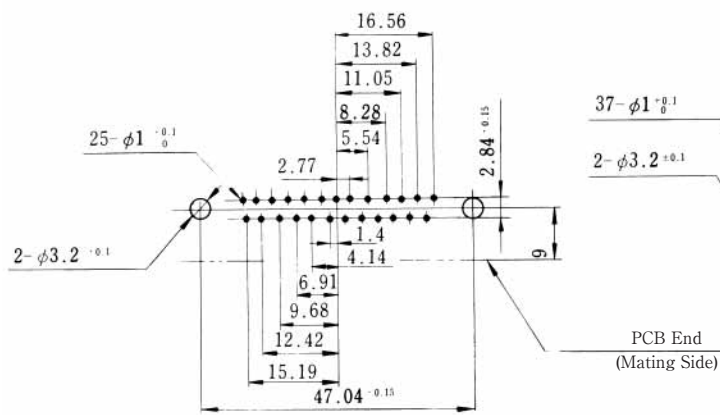


RDBD-25

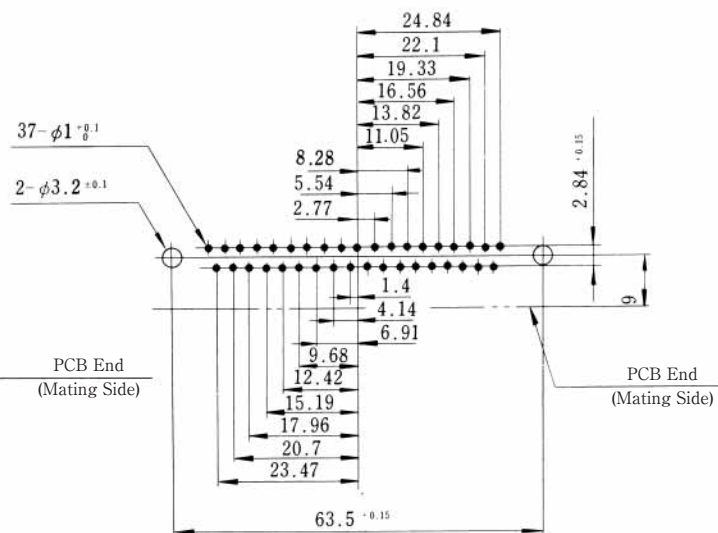

RDCD-37

## Mounting Cutout

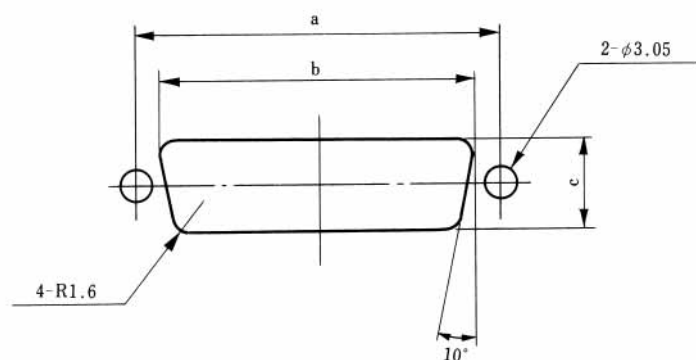

Unit: mm

Shell Size	a	b	c
E	24.99	20.2	11.5
A	33.32	28.6	11.5
B	47.04	42.3	11.5
C	63.5	58.7	11.5



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Hirose Electric:

[RDBD-25SE-LN\(55\)](#) [RDBD-25S-LN\(55\)](#) [RDBD-25S-LN\(4-40\)\(55\)](#) [RDAD-15SE-LNA\(4-40\)\(55\)](#) [RDAD-15S-LNA\(4-40\)GP\(55\)](#) [RDAD-15S-LNA\(55\)](#) [RDBD-25P-LNA\(4-40\)\(55\)](#) [RDAD-15PE1/M2.6\(55\)](#) [RDBD-25P\(55\)](#) [RDAG-15SE1\(50\)](#) [RDBD-25P-LNA\(55\)](#) [RDBD-25SA-LN\(55\)](#) [RDBD-25SE1/M2.6\(55\)](#) [RDBD-25S-LNA\(55\)](#) [RDBD-25S\(4-40\)\(55\)](#) [RDAD-15SE1-PLC\(L\)\(57\)](#) [RDAD-15SE-LN\(55\)](#) [RDBD-25P-LN\(55\)](#) [RDBD-25S-LNA\(4-40\)\(55\)](#) [RDAD-15S-LNA\(4-40\)\(55\)](#) [RDBD-25PE1/M2.6\(55\)](#) [RDBD-MEKURAPIN](#) [RDBD-25PE-LNA\(56\)](#) [RDAF-15SE-LNA\(50\)](#) [RDBD-25S-LN\(57\)](#) [RDAG-15SE1-LNA-W2\(50\)](#) [RDBD-25SE-LNA\(55\)](#) [RDAG1-15SE1-PLC\(L\)\(55\)](#) [RDBD-25PA\(55\)](#) [RDAD-15S-LN\(55\)](#) [RDAG1-15SE1\(50\)](#) [RDBD-25SA-LNA\(4-40\)\(55\)](#) [RDBD-25SA-LNA\(55\)](#) [RDAD-15SE1/M2.6\(55\)](#) [RDBD-25PE-LN\(55\)](#) [RDAF-15S-LNA\(50\)](#) [RDBD-25S-LNA\(57\)](#) [RDBD-25PA-LNA\(55\)](#) [RDBD-25SE-LNA\(4-40\)\(55\)](#) [RDAD-15S\(55\)](#) [RDAD-15P-LN\(55\)](#) [RDBD-25S\(55\)](#) [RDAD-15P\(55\)](#) [RDAD-15P-LNA\(55\)](#) [RDAD-15PE-LNA\(55\)](#) [RDAD-15SE-LNA\(55\)](#) [RDAD-15SA-LNA\(55\)](#) [RDAD-15P-LNA\(4-40\)\(55\)](#) [RDAD-15PE-LN\(55\)](#)