

Bus system cable - SAC-5P- 2,0-900/FSB SCO - 1517916

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, INTERBUS (16 Mbps), 5-position, PUR halogen-free, green RAL 6017, shielded, free cable end, on Socket straight M12 SPEEDCON, B-coded, Cable length: 2 m



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 968038 |
| Weight per Piece (excluding packing) | 166.5 g |
| Custom tariff number | 85444290 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--|-------|
| Length of cable | 2 m |
| Stripping length of the free conductor end | 50 mm |

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------|----------|
| Rated current at 40°C | 4 A |
| Rated voltage | 60 V |
| Number of positions | 5 |
| Insulation resistance | ≥ 100 MΩ |

Bus system cable - SAC-5P- 2,0-900/FSB SCO - 1517916

Technical data

General

| | |
|----------------------|------------------------|
| Coding | B - inverse |
| Signal type/category | INTERBUS, 16 Mbps |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 66 |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Pin assignment

| | |
|--|-----------------------|
| Position = wire color (signal) = position (optional) | 1 (Socket) = YE (DO) |
| | 2 (Socket) = GN (DO) |
| | 3 (Socket) = GY (DI) |
| | 4 (Socket) = PK (DI) |
| | 5 (Socket) = BN (GND) |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Cable

| | |
|---|--------------------------------------|
| Cable type | INTERBUS |
| Cable type (abbreviation) | 900 |
| Conductor cross section | 0.22 mm ² |
| AWG signal line | 24 |
| Conductor structure signal line | 32x 0.10 mm |
| Wire colors | Green-yellow, white-brown, gray-pink |
| Twisted pairs | 2 cores to the pair |
| Overall twist | 3 pairs to the core |
| Shielding | Braided copper wires |
| External sheath, color | green RAL 6017 |
| External cable diameter | 8.00 mm |
| Smallest bending radius, fixed installation | 60 mm |

Bus system cable - SAC-5P- 2,0-900/FSB SCO - 1517916

Technical data

Cable

| | |
|---|---|
| Smallest bending radius, movable installation | 120 mm |
| Number of bending cycles | 5000000 |
| Bending radius | 120 mm |
| Traversing path | 10 m |
| Traversing rate | 1.6 m/s |
| Acceleration | 3.2 m/s ² |
| Outer sheath, material | PUR |
| Material conductor insulation | PE |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | > 5 GΩ*km |
| Conductor resistance | ≤ 159.8 mΩ/m |
| Working capacitance | 60 nF (At 800 Hz) |
| Signal speed | 0.66 c |
| Nominal voltage, cable | 250 V |
| Test voltage Core/Core | 1500 V |
| Test voltage Core/Shield | 1000 V |
| Flame resistance | IEC 60332-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -30 °C ... 70 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

Bus system cable - SAC-5P- 2,0-900/FSB SCO - 1517916

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

| |
|-----|
| EAC |
|-----|


Drawings

Schematic diagram



Pin assignment M12 socket, 5-pos., B-coded, female side


Cable cross section



INTERBUS [900]


Bus system cable - SAC-5P- 2,0-900/FSB SCO - 1517916

Dimensional drawing

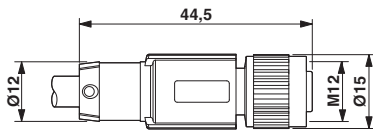

M12 x 1 socket, straight, shielded

Circuit diagram

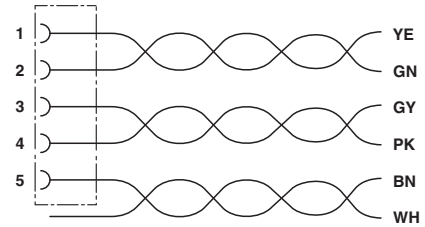

Contact assignment of the M12 socket

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1517916](#)