


Features

- ◆ Ultra-wide 4:1 input range
- ◆ SIP-9 package
- ◆ Full SMD design
- ◆ Temperature range -40 to +85°C
- ◆ High efficiency
- ◆ Excellent load and line regulation
- ◆ Indefinite short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty



The TMR-2WI series is a new family of isolated 2W dc-dc converter modules with regulated output, featuring ultra-wide 4:1 input voltage ranges of 9-36 VDC or 18-75 VDC. The product comes in a ultra-compact SIP-9 plastic package.

An excellent efficiency up to 84% allows -40°C to +85°C operation temperatures at full load. Further features include remote On/Off control and continuous short circuit protection. Typical applications for these ultra-compact converters are battery operated equipment and distributed power architectures in communication, instrumentation and industrial electronics, everywhere where space on the PCB is critical.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 2-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	500 mA	71 %
TMR 2-2411WI		5 VDC	400 mA	76 %
TMR 2-2412WI		12 VDC	165 mA	79 %
TMR 2-2413WI		15 VDC	135 mA	80 %
TMR 2-2421WI		±5 VDC	±200 mA	73 %
TMR 2-2422WI		±12 VDC	±85 mA	77 %
TMR 2-2423WI		±15 VDC	±65 mA	79 %
TMR 2-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	500 mA	70 %
TMR 2-4811WI		5 VDC	400 mA	72 %
TMR 2-4812WI		12 VDC	165 mA	78 %
TMR 2-4813WI		15 VDC	135 mA	78 %
TMR 2-4821WI		±5 VDC	±200 mA	70 %
TMR 2-4822WI		±12 VDC	±85 mA	76 %
TMR 2-4823WI		±15 VDC	±65 mA	76 %

Input Specifications

Input current at no load (nominal input)	24 Vin models: 48 Vin models:	20 mA typ. 15 mA typ.
Input current at full load (nominal input)	24 Vin models: 48 Vin models:	110 mA typ. 55 mA typ.
Surge voltage (100 msec. max.)	24 Vin models: 48 Vin models:	50 V max. 100 V max.
Reverse voltage protection		0.5 A max.
Input Filter		capacitor type
Start up time		<1ms (at nominal input and resistive load)

Output Specifications

Voltage set accuracy		±2 %
Regulation	– Input variation V_{in} min. to V_{in} max. – Load variation 25 – 100 %	0.5 % max. 0.75 % max. (single output models; 2.0 % max. (balanced load) (dual output models)
Minimum load		25 % of rated max current (operation at lower load condition is safe but a higher output ripple will be experienced)
Temperature coefficient		±0.02 %/°C max.
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max
Transient response (25 % load step change)		300 µs max.
Short circuit protection		continuous (automatic recovery)
Capacitive load	3.3 VDC models: 5 VDC models: 12 VDC models: 15VDC models: ±5 VDC models: ±12 VDC models: ±15 VDC models:	2'200 µF max. 1'000 µF max. 170 µF max. 110 µF max. 470 µF max. (each output) 100 µF max. (each output) 47 µF max. (each output)

General Specifications

Temperature ranges	– Operating – Case temperature – Storage	–40°C to +85°C +90°C max. –55°C to +105°C
Derating (convection cooling)		2.9 %/K above 65°C
Humidity (non condensing)		95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		>1 Mio h
Isolation voltage (60 sec.)	– Input/Output	1'500 VDC
Isolation capacitance	– Input/Output	500 pF max.
Isolation resistance	– Input/Output (500 VDC)	>1'000 M Ohm
Switching frequency		100 to 650 kHz (PFM)
Remote On/Off control	– On: – Off: – Off stand by input current	<0.6 VDC or open circuit 2.9 to 15 VDC 1 mA typ / 3 mA max.
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf - RoHS directive 2011/65/EU



All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non-conductive plastic (UL 94V-0 rated)
Potting material	epoxy (UL 94V-0 rated)
Weight	6.5 g (0.23 oz)
Soldering temperature	max. 260°C / 10 sec.

Supporting documents: www.tracopower.com/overview/tmr2wi

Outline Dimensions

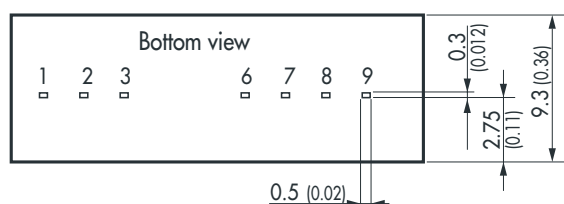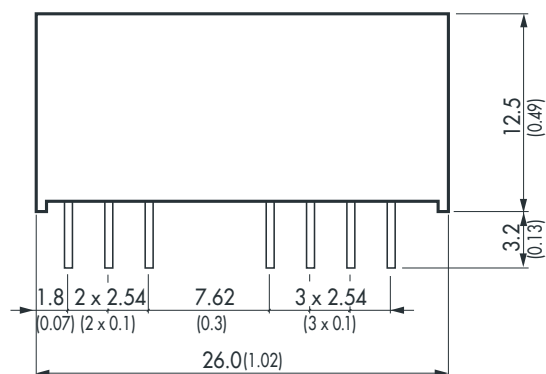

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
6	+Vout	+Vout
7	ntc	Common
8	ntc	ntc
9	-Vout	-Vout

(ntc = not to connect)

Dimensions in [mm], () = Inch
Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 ± 0.002)
Tolerances ± 0.5 (± 0.02)
Pin pitch tolerances ± 0.2 (± 0.008)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TMR 2-2422WI](#) [TMR 2-2412WI](#) [TMR 2-4811WI](#) [TMR 2-2411WI](#) [TMR 2-4812WI](#) [TMR 2-4821WI](#) [TMR 2-2410WI](#)
[TMR 2-2421WI](#) [TMR 2-2423WI](#) [TMR 2-4810WI](#) [TMR 2-4823WI](#) [TMR 2-4813WI](#) [TMR 2-2413WI](#) [TMR 2-4822WI](#)