


Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F



Snap-in version



See below:

Approvals and Compliances

Description

- Panel Mount :
Snap-in version from front side
- 1 Function :
Module of 4 outlets , Pin temperature 70 °C , Protection class I
- Solder terminals or quick connect terminals

Characteristics

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Suitable for use in equipment according to IEC/UL 60950

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

| | |
|---------------------------------|---|
| Ratings IEC | 10A / 250VAC; 50 Hz |
| Ratings UL/CSA | 15A / 250VAC; 60 Hz |
| Dielectric Strength | > 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz) |
| Allowable Operation Temperature | -25 °C to 70 °C |
| IP-Protection | from front side IP 30 acc. to IEC 60529 |
| Insulation cover | Suitable for appliances with protection class I acc. to IEC 61140 |
| Terminal | Solder terminals or quick connect terminals |
| Panel Thickness S | Snap-in/1.2/1.5/2/2.5/3 mm tolerance +/- 0.1 |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|-------------------------|---|
| appliance inlet/-outlet | F acc. to IEC 60320-3 UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I |
|-------------------------|---|

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

Approvals





The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

| Approval Logo | Certificates | Certification Body | Description |
|---------------|-------------------------------|--------------------|---------------------|
| | VDE Approvals | VDE | Certificate Number: |
| | UL Approvals | UL | UL File Number: |


Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--|-----------------------|------------------|---|
|  | Designed according to | IEC 60320-1 | Appliance couplers for household and similar general purposes |
|  | Designed according to | IEC 60320-3 | Appliance couplers for household and similar general purposes |
|  | Designed according to | UL 498 | Standard for Attachment Plugs and Receptacles |
|  | Designed according to | CSA C22.2 no. 42 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |





Application standards

Application standards where the product can be used

| Organization | Design | Standard | Description |
|--|--------------------------------|--------------|---|
|  | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. |


Compliances


The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|--|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS | SCHURTER AG | EU Directive RoHS 2011/65/EU |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimensions [mm]

Quadbloc 4752

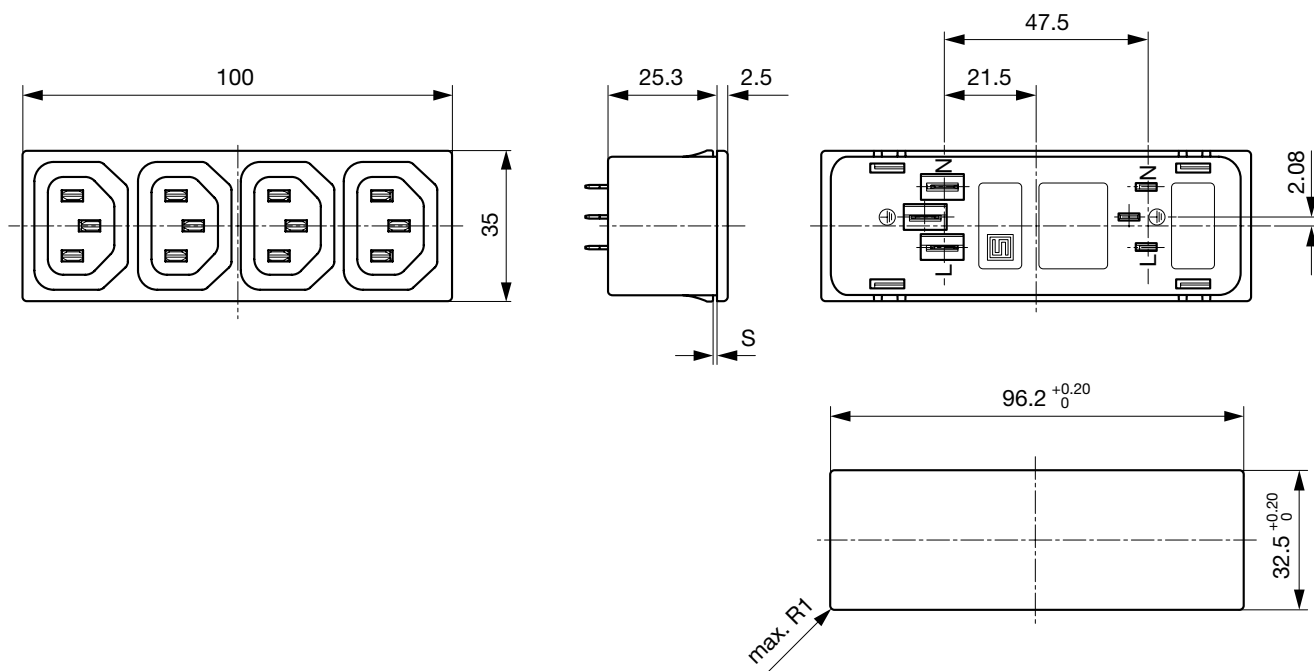

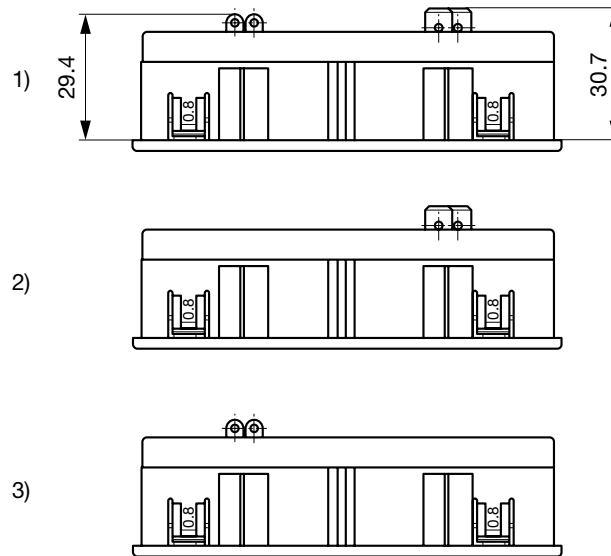

- 1) Solder and quick connect terminals 6.3x0.8 mm
- 2) only quick connect terminals 6.3x0.8 mm
- 3) only solder terminals

All Variants

| Panel Thickness [mm] | Terminal | Length [mm] | Order Number |
|----------------------|--|-------------|--------------|
| 1 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.3200 |
| 1.2 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.8200 |
| 1.5 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.4200 |
| 2 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.5200 |
| 2.5 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.6200 |
| 3 | Quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.7200 |
| 1 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.3400 |
| 1.2 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.8400 |
| 1.5 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.4400 |
| 2 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.5400 |
| 2.5 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.6400 |
| 3 | Solder terminals 4 x 0.8 mm | 100 mm | 4752.7400 |
| 1 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.3000 |
| 1.2 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.8000 |
| 1.5 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.4000 |
| 2 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.5000 |
| 2.5 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.6000 |
| 3 | Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm | 100 mm | 4752.7000 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

Packaging unit 50 Pcs

Mating Inlets/Plugs

Category / Description

[Plug Overview complete](#)

| | |
|---|------|
| IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm | 4732 |
| IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm | 4735 |
| IEC Plug E, Cord Connector (Rewireable), Straight | 9009 |
| IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 8.5 mm | 4733 |
| IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm | 4736 |
| Plug further types to 4752 | ... |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

[4752.4000](#) [4752.4200](#) [4752.4400](#) [4752.3](#) [4752.5](#) [4752.52](#) [4752.62](#) [4752.64](#) [4752.82](#) [4752.3000](#) [4752.5200](#)
[4752.6200](#) [4752.5000](#) [4752.8200](#) [4752.6400](#)