



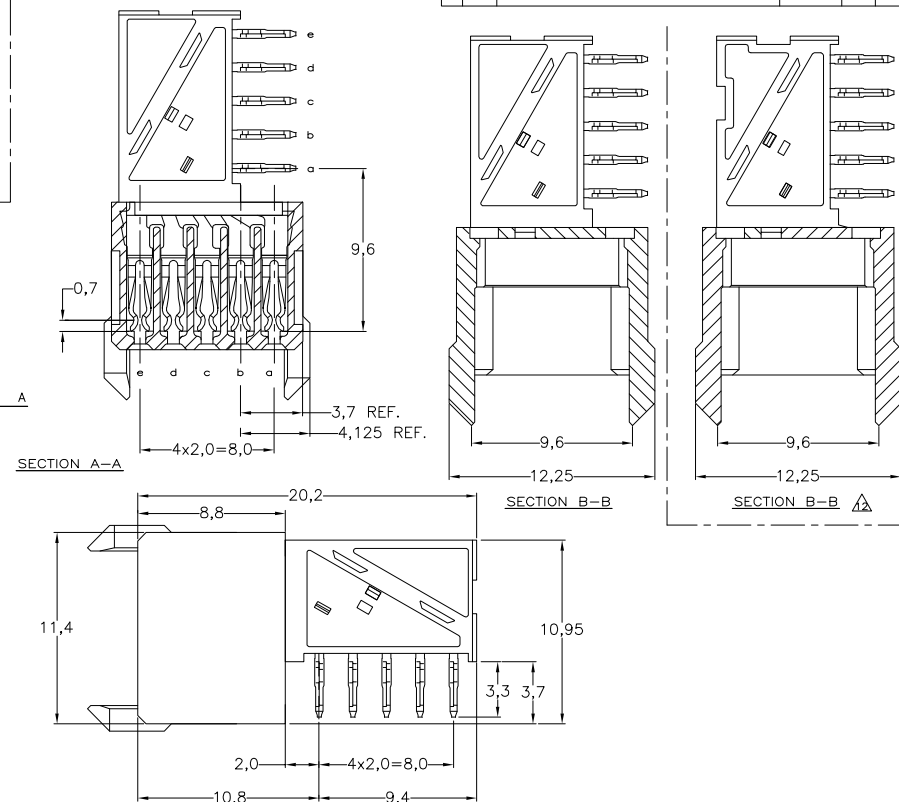

△	MATERIAL CONTACT; PHOSPHORBRONZE
△	MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY) UL-RATING 49VO
△	GENERAL PLATING SPECIFICATION; OVERPLATING (ENTIRE CONTACT): 1.27μm NICKEL MIN.
△	AND ACTION PLATING; 0.5μm TIN-LEAD MIN.
△	FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
△	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
△	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
△	CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
△	CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
△	CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
△	CONNECTOR MARKED WITH PARTNUMBER AND DATECODE.
△	THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
△	PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 110 HOLES.
10	FITS WITH INTEGRATED GROUND RETURN UPSHERSHIELD, BASIC P.N. 338107
△	AND INTEGRATED GROUND RETURN LOWERSHIELD, BASIC P.N. 338108
△	AREA RESERVED FOR CODING KEY, BASIC P.N. 100526
△	CONNECTOR ASSEMBLED WITH ALTERNATE FEMALE CONTACTS.
△	1.27μm MIN GOLD PLATING AT MATING SURFACES, NO LUBRICANT.

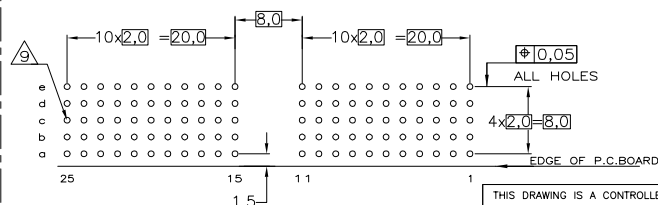

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN SANDERS YAN	10MAY2012	 TE Connectivity		
		CW				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Z-PACK 2mm HM TYPE A 110 POS. FEMALE CONNECTOR	RESTRICTED	
mm		APVD ALEX CAI	10MAY2012			
	0-PLC	±	PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029			
	1-PLC	±				
	2-PLC	±0.2				
	3-PLC	±				
ANGLES	±			SIZE	CAGE CODE	DRAWING NO.
MATERIAL	FINISH	WEIGHT	A2	00779	C=2170348	
CUSTOMER DRAWING			SCALE NTS. SHEET 1 of 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2170348-5](#)