


10		9		8		7		6		5		4		3		2		19160	
LOOSE PIECE		TAPE MOUNTED				"L" MAX.		"B" MIN $\text{\textcircled{G1}}$		"D" MAX.		"E" MIN.		I.D. MIN.		O.D. MAX.		"A" DIM $\pm.02/0.5 \text{\textcircled{G1}}$	
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.																
191600012	NC-2214	191600070	NC-2214T			.62/15.7		.30/7.6		.19/4.8		.24/6.1		.09/2.3		.32/8.1		1.54/39.2	
191600009	NC-2212	191600071	NC-2212T			.76/19.3		.30/7.6		.23/5.8		.27/6.9		.10/2.5		.36/9.1		1.63/41.4	
191600002	NC-1610	191600083	NC-1610T			.90/22.8		.28/7.1		.28/7.1		.38/9.6		.15/3.8		.45/11.4		1.75/44.5	
191600024	NC-8	191600028	NC-8T			1.10/27.9		.42/10.6		.36/9.1		.48/12.2		.21/5.3		.57/14.5		1.86/47.4	

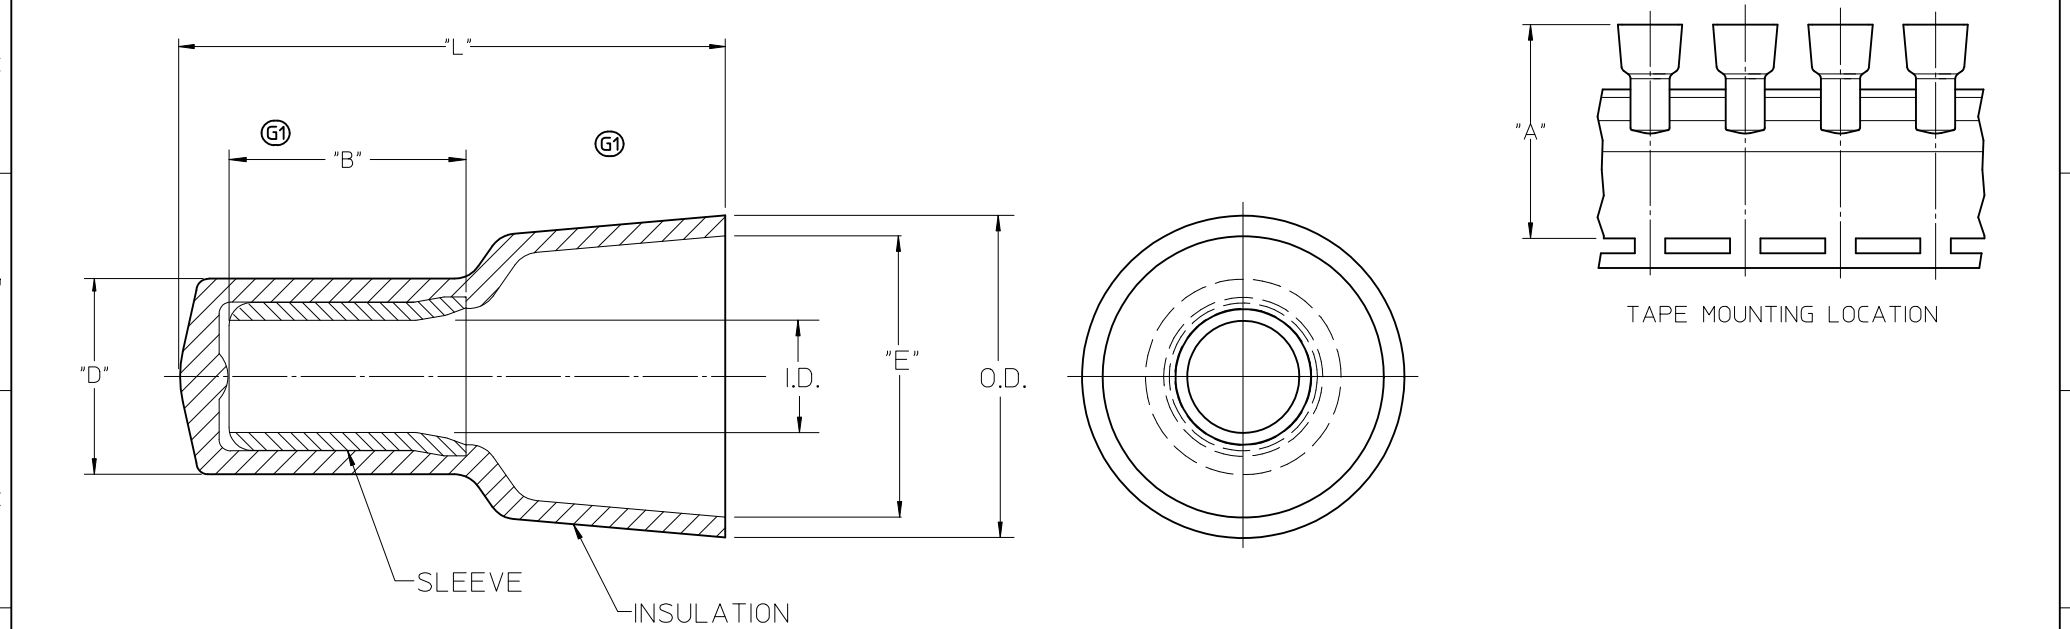

NOTES:

1. MATERIAL: SLEEVE: TIN-PLATED COPPER
INSULATION: 6/6 NYLON,
NATURAL TRANSLUCENT

2. PARTS ARE ROHS COMPLIANT.

SALES DRAWING

CORRECT TOLERANCES EC NO: WNA2010-0673 DRAWN BY: H.BEITZE CHKD.R. DEROSS APPR: JMACNEIL G1	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
						CLOSED END CONNECTORS NYLON INSULATED MOLEX INCORPORATED				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[19160-0170](#) [19160-0172](#)