
■ Features :

- DC/DC step-down converter
- Constant current output: 300mA to 1500mA
- Wide input voltage: 9 ~ 56VDC
- Wide output LED string voltage: 2 ~ 52VDC
- High efficiency up to 97%
- Built-in EMI filter, comply with EN55015 and FCC part15 without additional input filter and capacitors
- Built-in PWM and remote ON/OFF control
- Protections: Short circuit / Over temperature
- Cooling by free air convection
- Fully encapsulated with IP67 level for pin and wire style
- Non-potted, optional conformal coating for SMD style (Order No.: LDD-[350-1000]HSC)
- Compact size
- Low cost, high reliability
- Suitable for driving illumination LED
- 3 years warranty



LDD-350HW Blank : pin style
W : wire style
S : SMD style

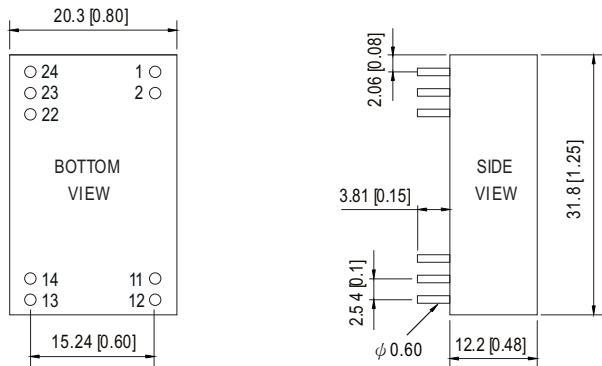
LDD-1200HW Blank : pin style
W : wire style

SPECIFICATION

ORDER NO.	LDD-300H	LDD-350H	LDD-500H	LDD-600H	LDD-700H	LDD-1000H	LDD-1200H	LDD-1500H	
OUTPUT	CURRENT RANGE	300mA	350mA	500mA	600mA	700mA	1000mA	1200mA	
	VOLTAGE RANGE Note.4	2 ~ 52VDC						2 ~ 46VDC	
	CURRENT ACCURACY (Typ.)	±3% at 24VDC input ; ±4% at 48VDC input for LDD-H/HW ; ±5% for LDD-HS							
	RIPLE & NOISE(max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	350mVp-p	350mVp-p	
	SWITCHING FREQENCY	40KHz ~ 1000KHz							
	EXTERNAL CAPACITANCE LOAD (max.)	2.2uF							
INPUT	VOLTAGE RANGE	9 ~ 56VDC							
	EFFICIENCY (max.)	97% at full load and 36VDC/48VDC input for LDD-H/HW ; 96% at full load and 36VDC/48VDC input for LDD-HS							
	DC CURRENT	Full load Note.3	270mA	320mA	450mA	550mA	650mA	900mA	
		No load	5mA						
	FILTER	Capacitor							
PWM DIMMING & ON/OFF CONTROL	REMOTE ON/OFF	Leave open if not use							
		Power ON with dimming: DIM ~ -Vin > 2.5 ~ 6VDC or open circuit							
	PWM FREQUENCY	100 ~ 1KHz							
	QUIESCENT INPUT CURRENT IN SHUTDOWN MODE(max.)	1mA at PWM dimming OFF and 24VDC input							
PROTECTION	SHORT CIRCUIT	Regulated at rated output current							
		Protection type: Can be continued, recovers automatically after fault condition is removed							
	OVER TEMPERATURE	Tj 150°C typically(IC1) detect on main control IC							
		Protection type : Shut down, recovers automatically after temperature goes down							
ENVIRONMENT	WORKING TEMP.	-40 ~ +85°C (Refer to derating curve)							
	WORKING HUMIDITY	20% ~ 90% RH non-condensing for LDD-H/HW ; 20%~85% RH non-condensing for LDD-HS							
	STORAGE TEMP., HUMIDITY	-55 ~ +125°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03% / °C							
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes							
	OPERATING CASE TEMP. (max.)	100°C							
	SAFETY STANDARDS	EAC TP TC 004 approved							
EMC	EMC EMISSION	Compliance to EN55015, FCC part 15 class B, EAC TP TC 020							
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,6,8, light industry level, criteria A, EAC TP TC 020							
OTHERS	MTBF	1000Khrs min. MIL-HDBK-217F (25°C)							
	DIMENSION	31.8*20.3*12.2mm or 1.25" * 0.8" * 0.48" inch (L*W*H) for LDD-H/HW ; 31.8*20.3*11.4mm or 1.25" * 0.8" * 0.45" inch (L*W*H) for LDD-HS							
	WEIGHT	LDD-H:15.6g ; LDD-HW:18g ; LDD-HS:12.8g							
	POTTING MATERIAL	Epoxy(UL94-V0) for LDD-H/HW ; without potted for LDD-HS							
NOTE	1. All parameters are specified at normal input(48VDC), rated load, 25°C 70% RH ambient. 2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uF capacitor. 3. Test condition: 48VDC input. 4. Output voltage will always step down by 3 volts from input DC voltage. 5. The output of LDD-H should not be connected to the input of the same unit or output from other sources.								

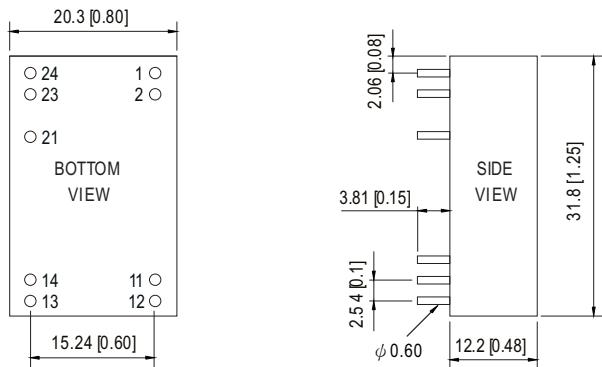
■ Mechanical Specification
◎ Blank type(LDD- 300~1000H):

Unit: mm (inch)


■ Pin Configuration

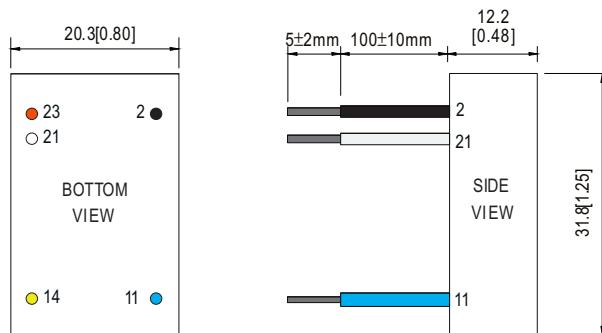
Pin No.	Comment
1,2	-Vin
11,12	-Vout
13,14	+Vout
22	PWM DIM
23,24	+Vin
others	N.C

NOTE: Pin tolerance ±0.05mm

◎ Blank type(LDD- 1200~1500H):


Pin No.	Comment
1,2	-Vin
11,12	-Vout
13,14	+Vout
21	PWM DIM
23,24	+Vin
others	N.C

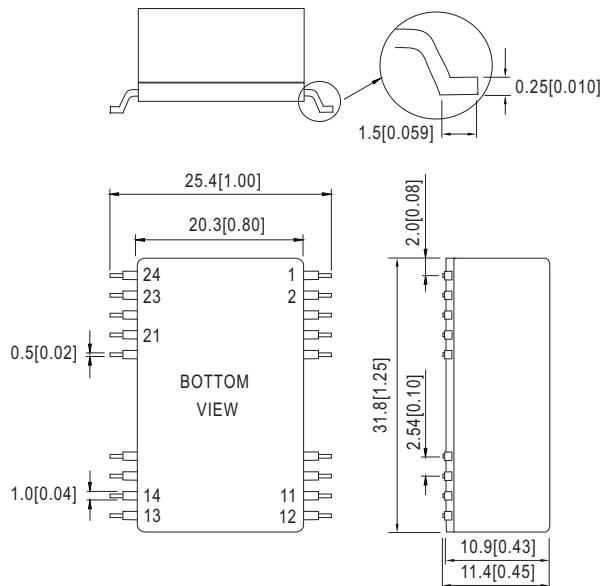
NOTE: Pin tolerance ±0.05mm

◎W type(LDD- 300~1500HW):


Pin No.	Comment
2	-Vin (Black)
11	-Vout (Blue)
14	+Vout (Yellow)
21	PWM DIM (White)
23	+Vin (Red)
others	N.C

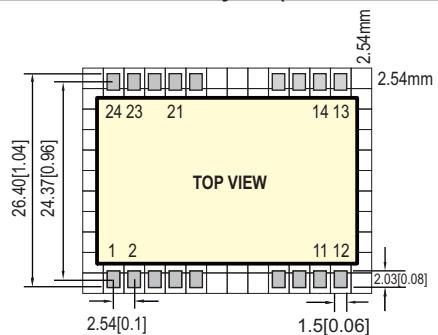
NOTE: All wires UL3385 22AWG

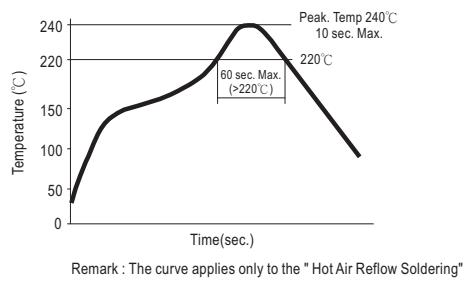
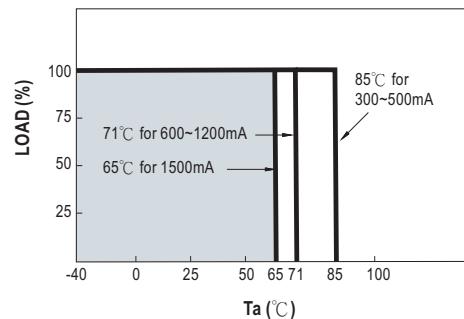

◎S type(LDD - 300~1000HS):



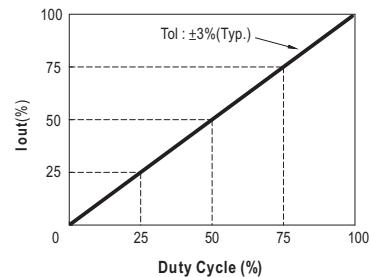
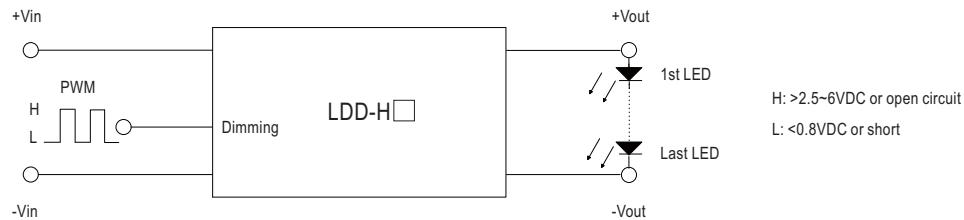
Pin No.	Comment
1,2	-Vin Don't connect to -Vout
11,12	-Vout LED - Connection
13,14	+Vout LED + Connection
21	PWM DIM ON/OFF and PWM Dimming (Leave open if not used)
23,24	+Vin DC Supply
others	N.C No connection

■ Recommended PCB layout (for LDD-300~1000HS)

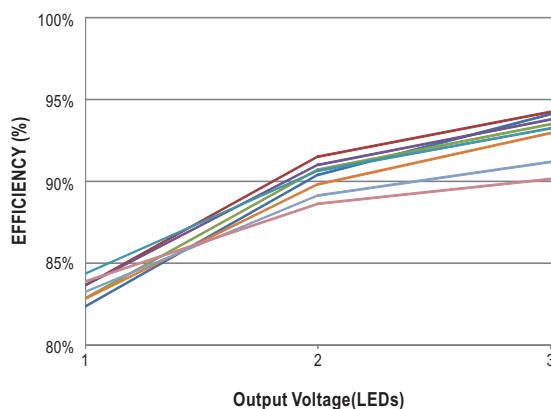
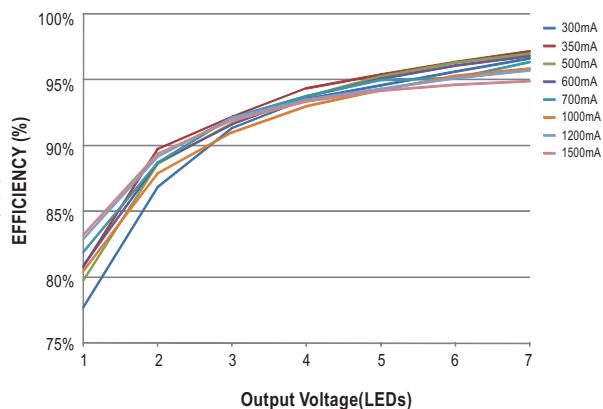
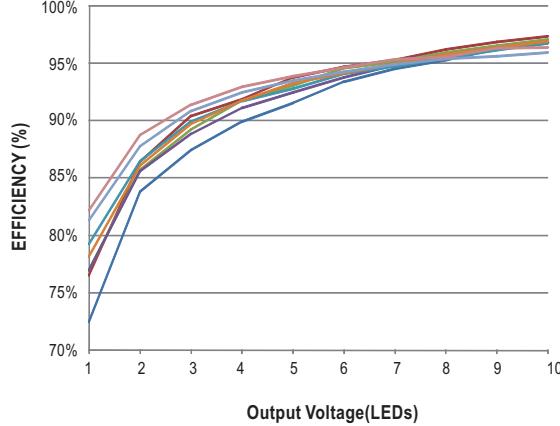
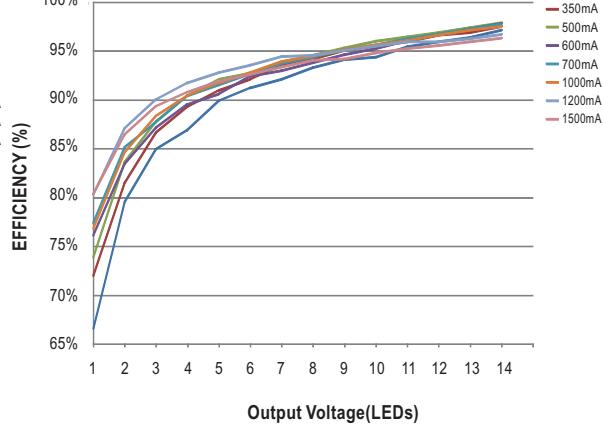


Reflow Soldering Curve (for LDD-300~1000HS)

Derating Curve

PWM Dimming Control


During PWM dimming operation, the output current will change to PWM style.


Standard Application


H: >2.5~6VDC or open circuit
L: <0.8VDC or short

Efficiency VS Output Voltage(Number of LEDs)
Fig-1
12VDC input, 1~3 LEDs(Vf=3V)

Fig-2
24VDC input, 1~7 LEDs(Vf=3V)

Fig-3
36VDC input, 1~10 LEDs(Vf=3V)

Fig-4
48VDC input, 1~14 LEDs(Vf=3V)


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MEAN WELL:

[LDD-1000H](#) [LDD-300H](#) [LDD-350H](#) [LDD-500H](#) [LDD-600H](#) [LDD-700H](#) [LDD-300HS](#) [LDD-700HS](#) [LDD-500HS](#)
[LDD-600HS](#) [LDD-1000HS](#) [LDD-350HS](#) [LDD-1500H](#) [LDD-1200H](#)